



COVERING A WEDGE SEAT & SIDE

1 Cover the Wedge Seat Frame

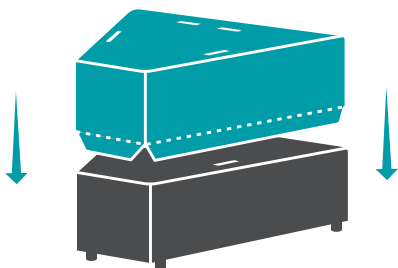

Align all 4 corners of the Cover with the top of the insert before attempting to pull the Cover down. Slide the Cover over the Wedge Seat Frame.


2 Attach the Wedge Seat Frame Cover

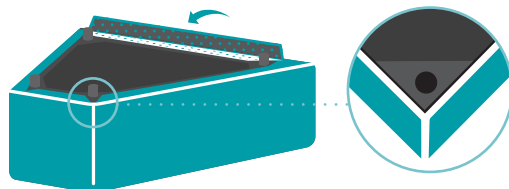

PRO TIP Take the time to align the seams on the covers with the edges of the insert.

Pull on each corner to ensure that the top is tight. Align Velcro on the Cover with the Velcro on the Wedge Seat Frame. Don't push any Velcro all the way down until you have all 4 sides aligned straight.

3 Cover the Wedge Seat Cushion



PRO TIP Be sure to insert the cushion into the cover with the zipper on the bottom.


Insert one side of your Cushion into the Cover, and then bend it in half to get the other side to pop in.

4 Cover the Back Pillow



Insert the Back Pillow into the Back Pillow Cover. Make sure that your labels are at the bottom of the Cover.


5 Cover the Side



PRO TIP Make sure the Clamp hole in the Cover is on the same side as the Clamp hole in the insert.

Align all 4 corners of the Cover with the top of the insert before attempting to pull the Cover down. Begin to slide the Cover over the Side. This is easier with two people!


6 Attach the Side Cover

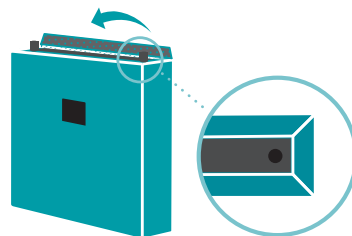

Pull on each corner to ensure that the top is tight and align Velcro on the Cover with the Velcro on the Side. Don't push any Velcro all the way down until you have all 4 sides aligned straight.

SETTING UP YOUR SACTIONALS WITH A WEDGE SEAT


1 Lay down L Shoes & Wedge Seat Frame



Make sure you place the Shoes face up with the wider tapered Foot opening at the top.

Start with 2 L Shoes and one Wedge Seat Frame. Start building in the middle of your room and build out from there. Visit lovesac.com for configuration inspiration.


2 Build a Second Wedge Seat Frame



Make sure that you leave the Shoes sticking out where you need to connect other Seats or Sides.

Build another Wedge Seat Frame with two L Shoes and place it next to your other Wedge Seat Frame. These two Wedge Seat Frames placed next to each other will create a 90 degree turn. Do not insert any Clamps until you have all Seats and Sides arranged.


3 Continue to lay out Shoes

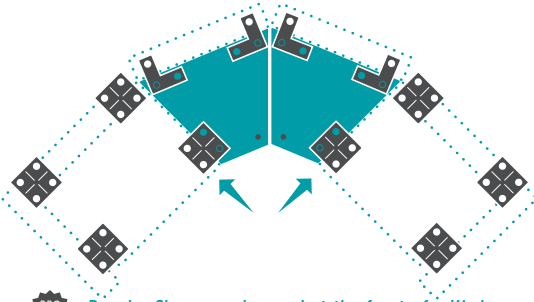

Regular Shoes can be used at the front of a Wedge Seat to connect them to regular Seats.

Lay out more Shoes on both sides of your Wedge Seat Frames and align them as close as you can to the right spot.


4 Add more Seat Frames

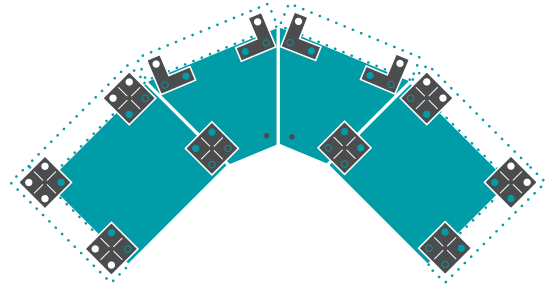

Do not insert any clamps until you have all Seats and Sides arranged.

Place two more standard Seat Frames on the Shoes that are exposed. Adjust the Shoes so they are straight and square with the alignment marks. Notice that this configuration will not require Shoes connecting one Wedge to another.


5 Add Sides

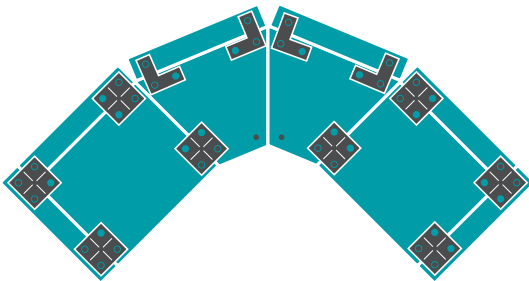

When placing the Sides, make sure Shoes are nice and square with the Seats and insert the Side at an angle.

Once you have all of the Seat Frames in place you can add the Sides.

6 Clamp Together

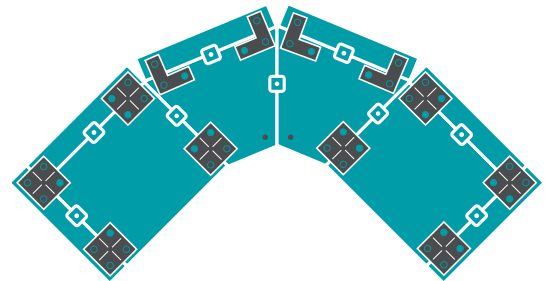

Clamps can be used to connect a Wedge Seat to another Wedge Seat, or to a regular Seat.

Use the steel Clamp to attach all Sides to the Seat Frames to complete our patented system.