

Ashford Mill Collection

Ashford Mill 2/6, Ashford Mill 2/12, Ashford Mill 2.5/20,
Ashford Mill 4.5/12 Click, Ashford Mill 5.0/20








Ashford Mill Collection

The Ashford Mill Collection by Aladdin Commercial offers LVT for a variety of commercial interior spaces. This collection provides woods and stone inspired visuals and is available in multiple thicknesses—2.0mm, 2.5mm, 4.5mm, and 5.0mm—a variety that is ideal for creating seamless transitions between hard and soft surface flooring and coordinating with other products in any space. Ashford Mill is perfect for multi-family and workplace environments.

Features

- 2.0mm thickness in both 6 mil and 12 mil wear layer
- 2.5mm and 5.0mm thicknesses with a 20 mil wear layer
- 5.0mm thickness promotes a loose-lay installation
- 4.5mm thickness with a 12 mil wear layer and UniClic installation
- 12 colorways in all thicknesses
- Enhanced Urethane Finish
- FloorScore® Certified
- See Specifications page for warranty, size availability and other specification information

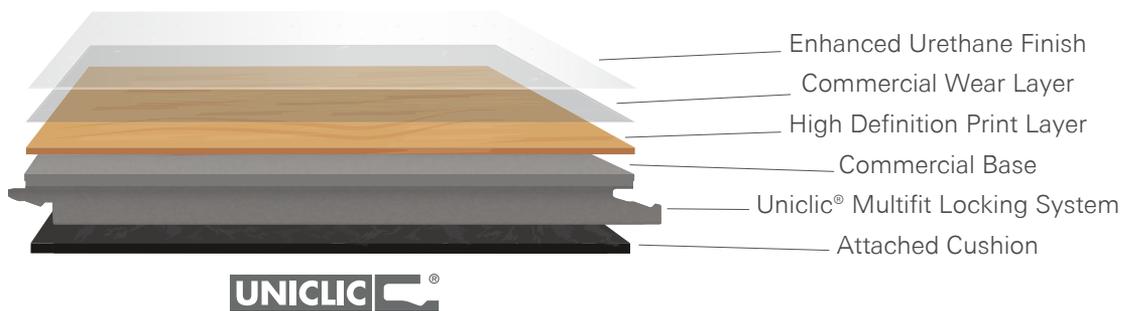

Note: UniClic® is only available in the 4.5/12 Click.

Ashford Mill Colorways

Stones



119 Alabaster



805 Corinth



906 Percy



918 Stetson

Woods



261 Elise



348 Maddox



830 Danielle



845 Baxter



855 Blake



891 Atlas



915 Odette



941 Ashwood

Note: All colorways available in all thicknesses

Specifications

ALADDIN COMMERCIAL LUXURY VINYL TILE	Brand.....	Aladdin Commercial
	Collection.....	Ashford Mill Collection
	Style Name / Number.....	Ashford Mill 2/6 / AH132
	Product Type.....	Luxury Vinyl Tile
	Total Thickness.....	2.0mm
	Wear Layer.....	6 mil
	Finish.....	Enhanced Urethane
	Colors Available.....	12
	Actual Size.....	Stones: 12" x 24" Woods: 7.25" x 48"
	Surface Profile.....	Embossed
	Edge Profile.....	Squared
	Packaging.....	Stones: 56.01 sqft/ctn (12"x24"), 48 ctns/pallet Woods: 58 sqft/ctn (7.25" x48"), 50 ctns/pallet
	Classification.....	ASTM F1700 Type B - Embossed
	Squareness.....	ASTM F 2421 ±0.10" max
	Size and Tolerance.....	Tile ASTM F2055; Plank ASTM F2421 - Passes - ±0.016"/linear foot
	Thickness.....	ASTM F386 ±0.005"
	Flexibility.....	ASTM F137 Passes
	Dimensional Stability.....	ASTM F2199 Passes
	Static Load Limit.....	ASTM F970 1000 psi
	Residual Indentation.....	ASTM F1914 Passes
	Resistance to Chemicals.....	ASTM F925 Passes
	Resistance to Light.....	ASTM F1515 Passes
	Resistance to Heat.....	ASTM F1514 Passes
	Critical Radiant Flux.....	ASTM E648 Class 1
	Smoke Density.....	ASTM E662 <450
	Installation Method.....	Glue Down
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive
	Optional Underlayment.....	Mohawk AccuSound™ - loose lay
	Certification.....	FloorScore® Certified
	Warranty.....	15 Year Residential

ALADDIN COMMERCIAL LUXURY VINYL TILE	Brand.....	Aladdin Commercial
	Collection.....	Ashford Mill Collection
	Style Name / Number.....	Ashford Mill 2/12 / AH134
	Product Type.....	Luxury Vinyl Tile
	Total Thickness.....	2.0mm
	Wear Layer.....	12 mil
	Finish.....	Enhanced Urethane
	Colors Available.....	12
	Actual Size.....	Stones: 12" x 24" Woods: 7.25" x 48"
	Surface Profile.....	Embossed
	Edge Profile.....	Micro Bevel
	Packaging.....	Stones: 60sqft/ctn (12"x24"), 48 ctns/ pallet Woods: 58 sqft/ctn (7.25"x48"), 50 ctns/pallet
	Classification.....	ASTM F1700 Type B - Embossed
	Squareness.....	ASTM F 2421 ±0.10" max
	Size and Tolerance.....	Tile ASTM F2055; Plank ASTM F2421 - Passes - ±0.016"/linear foot
	Thickness.....	ASTM F386 ±0.005"
	Flexibility.....	ASTM F137 Passes
	Dimensional Stability.....	ASTM F2199 Passes
	Static Load Limit.....	ASTM F970 1000 psi
	Residual Indentation.....	ASTM F1914 Passes
	Resistance to Chemicals.....	ASTM F925 Passes
	Resistance to Light.....	ASTM F1515 Passes
	Resistance to Heat.....	ASTM F1514 Passes
	Critical Radiant Flux.....	ASTM E648 Class 1
	Smoke Density.....	ASTM E662 <450
	Installation Method.....	Glue Down
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive
	Optional Underlayment.....	Mohawk AccuSound™ - loose lay
	Certification.....	FloorScore® Certified
	Warranty.....	25 Year Residential 6 Year Light Commercial

ALADDIN COMMERCIAL LUXURY VINYL TILE	Brand.....	Aladdin Commercial
	Collection.....	Ashford Mill Collection
	Style Name / Number.....	Ashford Mill 2.5/20 / AH135
	Product Type.....	Luxury Vinyl Tile
	Total Thickness.....	2.5mm
	Wear Layer.....	20 mil
	Finish.....	Enhanced Urethane
	Colors Available.....	12
	Actual Size.....	Stones: 12" x 24" Woods: 7.25" x 48"
	Surface Profile.....	Embossed
	Edge Profile.....	Micro Bevel
	Packaging.....	Stones: 52 sqft/ctn (12"x24"), 48 ctns/pallet Woods: 53.16 sqft/ctn (7.25"x48"), 45 ctns/pallet
	Classification.....	ASTM F1700 Type B - Embossed
	Squareness.....	ASTM F 2421 ±0.10" max
	Size and Tolerance.....	Tile ASTM F2055; Plank ASTM F2421 - Passes - ±0.016"/linear foot
	Thickness.....	ASTM F386 ±0.005"
	Flexibility.....	ASTM F137 Passes
	Dimensional Stability.....	ASTM F2199 Passes
	Static Load Limit.....	ASTM F970 1000 psi
	Residual Indentation.....	ASTM F1914 Passes
	Resistance to Chemicals.....	ASTM F925 Passes
	Resistance to Light.....	ASTM F1515 Passes
	Resistance to Heat.....	ASTM F1514 Passes
	Critical Radiant Flux.....	ASTM E648 Class 1
	Smoke Density.....	ASTM E662 <450
	Installation Method.....	Glue Down
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive
	Optional Underlayment.....	Mohawk AccuSound™ - loose lay
	Certification.....	FloorScore® Certified
	Warranty.....	30 Year Residential 10 Year Limited Light Commercial 6 Year Light Commercial

ALADDIN COMMERCIAL LUXURY VINYL TILE	Brand.....	Aladdin Commercial
	Collection.....	Ashford Mill Collection
	Style Name / Number.....	Ashford Mill 4.5/12 Click / AH137
	Product Type.....	Luxury Vinyl Tile
	Total Thickness.....	4.5mm
	Wear Layer.....	12 mil
	Finish.....	Enhanced Urethane
	Colors Available.....	12
	Actual Size.....	Stones: 11.93" x 23.91" Woods: 7.01"x49"
	Surface Profile.....	Embossed
	Edge Profile.....	Micro Bevel
	Packaging.....	Stones: 24 sqft/ctn, 48 ctns/ pallet Woods: 24.17 sqft/ctn, 50 ctns/pallet
	Classification.....	ASTM F1700 Type B - Embossed
	Squareness.....	ASTM F 2421 ±0.10" max
	Size and Tolerance.....	Tile ASTM F2055; Plank ASTM F2421 - Passes - ±0.016"/linear foot
	Thickness.....	ASTM F386 ±0.005"
	Flexibility.....	ASTM F137 Passes
	Dimensional Stability.....	ASTM F2199 Passes
	Static Load Limit.....	ASTM F970 1000 psi
	Residual Indentation.....	ASTM F1914 Passes
	Resistance to Chemicals.....	ASTM F925 Passes
	Resistance to Light.....	ASTM F1515 Passes
	Resistance to Heat.....	ASTM F1514 Passes
	Critical Radiant Flux.....	ASTM E648 Class 1
	Smoke Density.....	ASTM E662 <450
	Installation Method.....	Uniclic
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive
	Optional Underlayment.....	Mohawk AccuSound™ - UniClic
	Certifications.....	FloorScore® Certified
	Warranty.....	25 Year Residential 6 Year Light Commercial

Specifications

ALADDIN COMMERCIAL LUXURY VINYL TILE	Brand	Aladdin Commercial
	Collection	Ashford Mill Collection
	Style Name / Number	Ashford Mill 5.0/20 / AH136
	Product Type	Luxury Vinyl Tile
	Total Thickness	5.0mm
	Wear Layer	20 mil
	Finish	Enhanced Urethane
	Colors Available	12
	Actual Size	Stones: 12" x 24"
	Woods: 7.25" x 48"
	Surface Profile	Embossed
	Edge Profile	Micro Bevel
	Packaging	Stones: 24sqft/ctn (12"x24"), 48 ctns/pallet
	Woods: 24.17 sqft/ctn (7.25" x48), 50 ctns/pallet
	Classification	ASTM F1700 Type B - Embossed
	Squareness	ASTM F 2421 ±0.10" max
	Size and Tolerance	Tile ASTM F2055; Plank ASTM F2421 - Passes -
	±0.016"/linear foot
	Thickness	ASTM F386 ±0.005"
	Flexibility	ASTM F137 Passes
	Dimensional Stability	ASTM F2199 Passes
	Static Load Limit	ASTM F970 1000 psi
	Residual Indentation	ASTM F1914 Passes
	Resistance to Chemicals	ASTM F925 Passes
	Resistance to Light	ASTM F1515 Passes
Resistance to Heat	ASTM F1514 Passes	
Critical Radiant Flux	ASTM E648 Class 1	
Smoke Density	ASTM E662 <450	
Installation Method	Loose Lay, Glue Down	
Adhesive	M95.0 Resilient Flooring Adhesive, MS160 Spray	
.....	or M700 Pressure Sensitive Adhesive	
Optional Underlayment	Mohawk AccuSound™ - loose lay	
Certification	FloorScore® Certified	
Warranty	25 Year Residential	
.....	6 Year Light Commercial	

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. The use of Mohawk branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

For current and complete specifications please call tech support at 888-387-9881 or visit www.AladdinCommercial.com | 800.233.4490

0210C_Jan/2026

