

Bentwood Collection


















# Bentwood Collection

The Bentwood Collection by Aladdin Commercial offers 9" x 60" LVT planks designed for commercial interior spaces. This collection is a great choice for various commercial applications, as it features six different wood-inspired visuals and is available in three different thickness options. This variety allows for greater flexibility in project budgets and provides more choices for creating seamless transitions between hard and soft surface flooring and coordinating with other products in any space.

## Features

- 2 mm, 2.5 mm, and 5.0 mm overall thicknesses
- 9" x 60" planks
- 12 mil and 20 mil wear layer
- Enhanced Urethane Finish
- FloorScore® Certified
- 10 Year Light Limited Commercial Warranty
- 25 Year Limited Residential Warranty

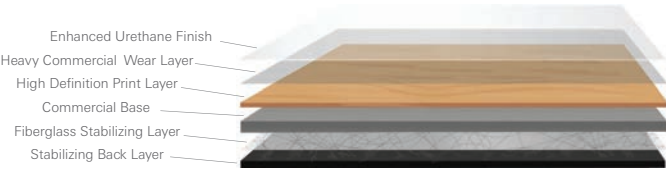

822 Pierre



832 Benton



838 Barkley



848 Wyndale



879 Rutledge



948 Elliot



Specifications

LVT	Brand .....	Aladdin Commercial
	Collection .....	Bentwood
	Style Name / Number .....	Bentwood 2.0 / AH133
	Product Type .....	Luxury Vinyl Tile
	Overall Gauge .....	2.0 mm
	Wear Layer .....	12 mil (0.3mm)
	Finish .....	Enhanced Urethane
	Colors Available.....	6
	Size .....	9" x 60" (228.60 mm x 1,524.0 mm)
	Packaging .....	18 pcs/ctn
	Sf/Carton .....	66.84 sq. ft.
	Cartons/Pallet.....	52
	Weight / Carton .....	458.51 oz.
	Emboss .....	Overall
	Bevel .....	Micro
	Classification .....	(ASTM F1700) Type B - Embossed
	Squareness .....	(ASTM F 2421) Passes
	Size and Tolerance.....	(Plank ASTM F 2421) Passes
	Thickness .....	(ASTM F386) Passes
	Flexibility .....	(ASTM F137) Passes
	Dimensional Stability .....	(ASTM F2199) Passes
	Static Load Limit.....	(ASTM F970) 1500 psi
	Residual Indentation.....	(ASTM F1914) Passes
	Resistance to Chemicals.....	(ASTM F925) Passes
	Resistance to Light.....	(ASTM F1515) Passes
	Resistance to Heat Flux .....	(ASTM E649) >0.45 W/cm²
	Smoke Density .....	(ASTM E662) <450
	Installation Method .....	Glue Down
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Plus
	Certification .....	FloorScore® Certified
	Warranty .....	Limited 10 Year Light Commercial Warranty Limited 25 Year Residential Warranty

LVT	Brand .....	Aladdin Commercial
	Collection .....	Bentwood
	Style Name / Number .....	Bentwood 2.5 / AH126
	Product Type .....	Luxury Vinyl Tile
	Overall Gauge .....	2.5 mm
	Wear Layer .....	20 mil (0.5mm)
	Finish .....	Enhanced Urethane
	Colors Available.....	6
	Size .....	9" x 60" (228.60 mm x 1,524.0 mm)
	Packaging .....	14 pcs/ctn
	Sf/Carton .....	52
	Cartons/Pallet.....	52
	Weight / Carton .....	728.28 OZ
	Emboss .....	Overall
	Bevel .....	Micro
	Classification .....	(ASTM F1700) Type B - Embossed
	Squareness .....	(ASTM F 2421) Passes
	Size and Tolerance.....	(Plank ASTM F 2421) Passes
	Thickness .....	(ASTM F386) Passes
	Flexibility .....	(ASTM F137) Passes
	Dimensional Stability .....	(ASTM F2199) Passes
	Static Load Limit.....	(ASTM F970) 1500 psi
	Residual Indentation.....	(ASTM F1914) Passes
	Resistance to Chemicals.....	(ASTM F925) Passes
	Resistance to Light.....	(ASTM F1515) Passes
	Resistance to Heat Flux .....	(ASTM E649) >0.45 W/cm²
	Smoke Density .....	(ASTM E662) <450
	Installation Method .....	Glue Down
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Plus
	Certification .....	FloorScore® Certified
	Warranty .....	Limited 10 Year Light Commercial Warranty Limited 25 Year Residential Warranty

LVT	Brand .....	Aladdin Commercial
	Collection .....	Bentwood
	Style Name / Number .....	Bentwood 5.0 / AH127
	Product Type .....	Luxury Vinyl Tile
	Overall Gauge .....	5 mm
	Wear Layer .....	20 mil (0.5mm)
	Finish .....	Enhanced Urethane
	Colors Available.....	6
	Size .....	9" x 60" (228.60 mm x 1,524.0 mm)
	Packaging .....	6 Per CTN
	SF/Carton .....	22.3 sq. ft.
	Cartons/Pallet.....	60
	Weight / Carton .....	681.48 oz
	Emboss .....	Overall
	Bevel .....	Micro
	Classification .....	(ASTM F1700) Type B - Embossed
	Squareness .....	(ASTM F 2421) Passes
	Size and Tolerance.....	(Plank ASTM F 2421) Passes
	Thickness .....	(ASTM F386) Passes
	Flexibility .....	(ASTM F137) Passes
	Dimensional Stability .....	(ASTM F2199) Passes
	Static Load Limit.....	(ASTM F970) 1500 psi
	Residual Indentation.....	(ASTM F1914) Passes
	Resistance to Chemicals.....	(ASTM F925) Passes
	Resistance to Light.....	(ASTM F1515) Passes
	Resistance to Heat Flux .....	(ASTM E649) >0.45 W/cm²
	Smoke Density .....	(ASTM E662) <450
	Installation Method .....	Glue Down, Loose Lay
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Plus
	Optional Underlayment .....	Mohawk AccuSound™ - Loose lay
	Certification .....	FloorScore® Certified
	Warranty .....	Limited 10 Year Light Commercial Warranty Limited 25 Year Residential Warranty



Printed on FSC® certified paper

Aladdin  
COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk’s floor preparation procedures must be followed to ensure that the substrate has been prepared properly. The use of Mohawk branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit [www.AladdinCommercial.com](http://www.AladdinCommercial.com) 1 800.233.4490

