












Familiar Frontier II Collection

Familiar Frontier II provides a wide range of wood visuals from minimal grain to modern rustic in 14 colorways. The 6 mil and 12 mil wear-layer options provide flexibility in specification and price to suit a range of project types and budgets. The 6" x 48" plank size allows for unique installations, constructed with an enhanced urethane finish to provide longer-lasting performance.


Glue Down Features & Benefits (AH078 / AH080):

- 2 mm overall gauge
- 6 mil or 12 mil commercial wear layer
- 6" x 48"
- Enhanced Urethane Finish

- FloorScore Certified
- Limited 5 Year Light Commercial Warranty (6 mil)
- Limited 10 Year Light Commercial Warranty (12 mil)
- Limited 25 Year Residential Warranty



Familiar Frontier II Color Options

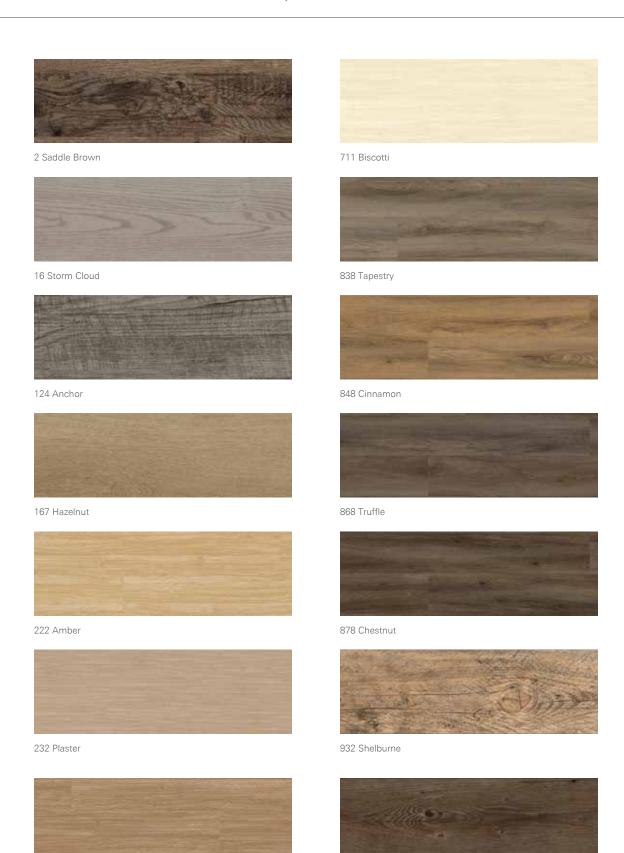

258 Tawny 983 Sepia

Specifications

	BrandStyle Name / Number	Aladdin Commercial Familiar Frontier II / AH078
F	Product Type	Luxury Vinyl Tile
LVT	Overall Gauge	2.0 mm
	Wear Layer	6 mil
	Finish	Light Commercial
	Colors Available	14
	Size	6" x 48"
	Packaging	4' 0.4" x 6.25" x 2.4"
	SF/Carton	54
	Cartons/Pallet	54
	Weight/Carton	44 lbs

	BrandStyle Name / Number	Aladdin Commercial Familiar Frontier Plus II / AH080
<u>⊢</u>	Product Type	Luxury Vinyl Tile
LVT	Overall Gauge	2.0 mm
	Wear Layer	12 mil
	Finish	Light Commercial
	Colors Available	14
	Size	6" x 48"
	Packaging	4' 0.4" x 6.25" x 2.4"
	SF/Carton	54
	Cartons/Pallet	54
	Weight/Carton	44 lbs

Brand.		Aladdin Commercial
Style N	ame / Number	Familiar Frontier II (Universal Specifications)
Classifi	cation	(ASTM F1700) Type B - Embossed
Square	ness	(ASTM F 2421) ±0.10" max
Size an	d Tolerance	Plank ASTM F2421 - Passes - ±0.016"/linear foot
Thickne	SS	(ASTM F386) ±0.005"
Flexibili	ty	(ASTM F137) Passes
Dimens	ional Stability	(ASTM F2199) Passes
Static L	oad Limit	(ASTM F970) 1500 psi
Residua	al Indentation	(ASTM F1914) Passes
Resista	nce to Chemicals	(ASTM F925) Passes
Resista	nce to Light	(ASTM F1515) Passes
Resista	nce to Heat Flux	(ASTM E649) >0.45 W/cm2
Smoke	Density	(ASTM E662) <450
Installa	tion Method	Glue Down
Adhesiv	/e	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Plus Pressure Sensitive Adhesive
Certific	ation	FloorScore® Certified
Warran	ty	Limited 5 Year Light Commercial Warranty (6 mil)
1		Limited 10 Year Light Commercial Warranty (12 mil)
		Limited 25 Year Residential Warranty



Printed on FSC® certified paper



Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. The use of Mohawk branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.