

Sohana



Aladdin
COMMERCIAL



37 Maylee
Cover: 12 Laken, 96 Wylla



6 Zyra







12 Laken, 96 Wylla

Sohana

Bringing sophistication with a modern-rustic twist, Sohana was inspired by nature-influenced artwork and hues. The wide array of color and design allows for easy coordination in a multitude of aesthetics.

Features:


- 2 mm overall thickness
- 6" x 48" wood planks
- 6 mil wear layer
- Commercial Urethane Finish
- FloorScore® Certified
- 5 Year Limited Light Commercial Warranty
- 15 Year Limited Residential Warranty

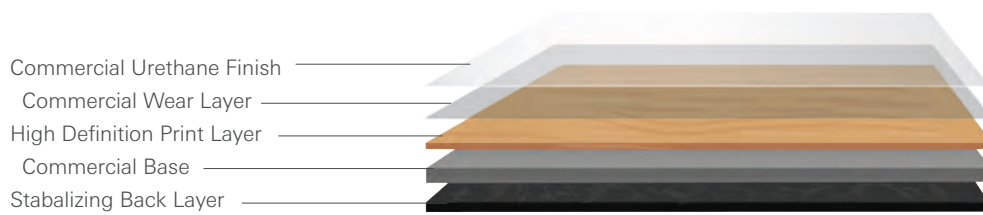

2 Berklee



3 Brennex




6 Zyra




12 Laken




16 Myla




30 Axel




37 Maylee




72 Remi



96 Wylla




124 Rowan




136 River



167 Reed



193 Evalee



224 Reigh

Specifications

<div style="border: 1px solid black; padding: 2px;">LVT</div>	<p>Brand..... Aladdin Commercial</p> <p>Style Name / Number Sohana / AH010</p> <p>Product Type..... Commercial Grade Luxury Vinyl Tile (Glue Down)</p> <p>Overall Gauge..... 2mm</p> <p>Wear Layer 6 mil (0.15mm)</p> <p>Finish Commercial Urethane Finish</p> <p>Colors Available..... 14</p> <p>Size 6" x 48" (152.4mm x 1,219.2mm)</p> <p>Packaging SF/CTN..... 54 sf/ctn; 48 ctns/pallet (2,592 sf); 35.4 lbs./ctn</p> <p>Classification ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed</p> <p>Squareness..... ASTM F2421 - Passes - $\pm 0.10"$ max</p> <p>Size and Tolerance..... Tile ASTM F2055; Plank ASTM F2421 - Passes - $\pm 0.16"/$linear foot</p> <p>Thickness..... ASTM F386 - Passes - As specified ± 0.005 in.</p> <p>Flexibility ASTM F137 - Passes - 1" mandrel</p> <p>Dimensional Stability ASTM F2199 - Passes - 0.020"/linear foot max</p> <p>Static Load Limit..... ASTM F970 - Passes, modified at 1500 psi (Glue Down)</p> <p>Residual Indentation ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%</p> <p>Resistance to Chemicals ASTM F925 - Passes - No more than a slight change in surface dulling, surface attack, or staining</p> <p>Resistance to Light..... ASTM F1515 - Passes - $\Delta E < 8$</p> <p>Resistance to Heat ASTM F1514 - Passes - $\Delta E < 8$</p> <p>Critical Radiant Flux..... ASTM E648 - Class 1 (> 0.45 W/cm²)</p> <p>Smoke Density..... ASTM E662 Part A - Less than 450</p> <p>Installation..... Glue Down</p> <p>Adhesive..... M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive</p> <p>Optional Underlayment Mohawk AccuSound™</p> <p>Certification..... FloorScore® Certified</p> <p>Warranty..... Limited 5 Year Light Commercial Warranty Limited 15 Year Residential Warranty</p>
---	---

Aladdin[™]
COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.mohawkflooring.com | 800.233.4490



Up to 10,000 sq. ft. available within 10 business days or less

