



Taking Root

Book I: Zone Lines



Taking Root

Inspired by our deep connection to nature and the grown world, Taking Root explores design elements drawn from mycelium and mushrooms. This LVT collection includes three styles to support unique biophilic design strategies. The style Zone Lines is featured in this book.

Zone Lines evokes the unusual beauty of spalting maple, tracing a natural process that occurs when fungi begin to grow inside wood. The growth and its root-like mycelium structures create intricate linear details in the wood grain, producing a striking organic design.



Learn more at mohawkgroup.com

Cover:
Zone Lines, 834 Time, Rigid Click 6mm, Random







Ultra Performance and Seamless Solutions for Any Project

Zone Lines is available in three platforms, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. The product is designed with a 20 mil heavy commercial wear layer and our premium M-Force Ultra technology, which delivers a complete performance system for LVT.

M-Force™ Ultra

Taking Root features our M-Force Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Q QUICKSHIP

Flex products available through Mohawk Group's QuickShip and Ready to Ship programs. Visit mohawkgroup.com for availability and inventory.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.



FLEX 2.5MM

A LIVING LOCAL STYLE

No transition strips needed between Zone Lines 2.5mm and EcoFlex™ Matrix backed carpet tile products, reducing installation time and costs.

- Made in our Dalton, GA facility, where we reuse 100% of our post-industrial material
- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



FLEX 4.5MM

A LARGE AND LOCAL STYLE

No transition strips needed between Zone Lines 4.5mm and EcoFlex™ ONE or EcoFlex™ NXT backed carpet tile products, reducing installation time and costs.

- Made in our Dalton, GA facility, where we reuse 100% of our post-industrial material
- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



RIGID CLICK 6MM

5MM + 1MM ATTACHED PAD

Zone Lines Rigid Click with attached pad is water resistant and helps create the quietest spaces that resilient flooring can provide.

- Attached pad provides industry-leading IIC and STC ratings for best-in-class acoustic performance
- Water resistant
- No adhesive or underlayment required
- Immediate occupancy
- Floorscore® certified for low VOCs





Zone Lines, 849 Dotting
Flex 4.5mm, Random




Zone Lines, 989 Temperature
Flex 4.5mm, Random



Zone Lines, 569 Water
Flex 2.5mm, Random




Colorways

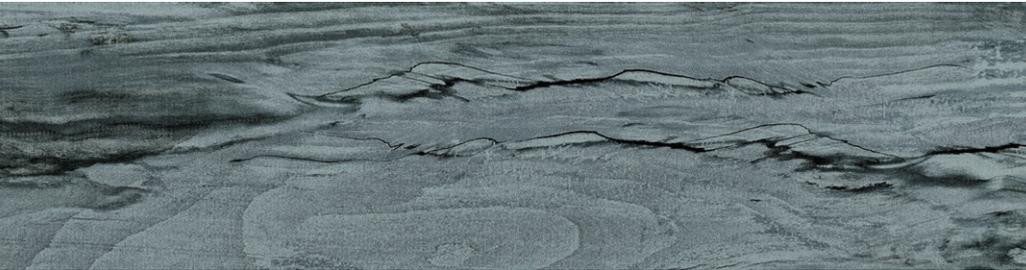

569 Water




834 Time

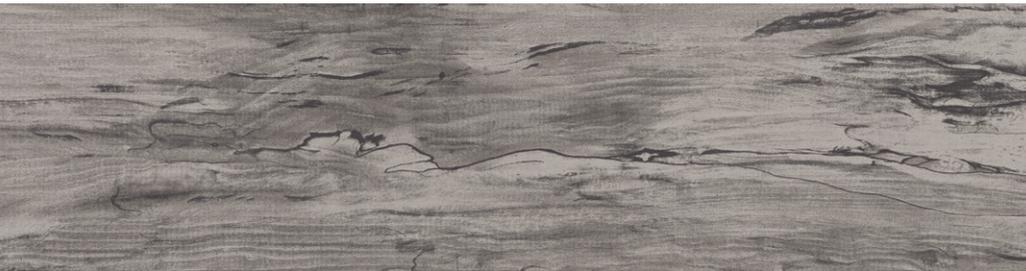

849 Dotting



945 Oxygen

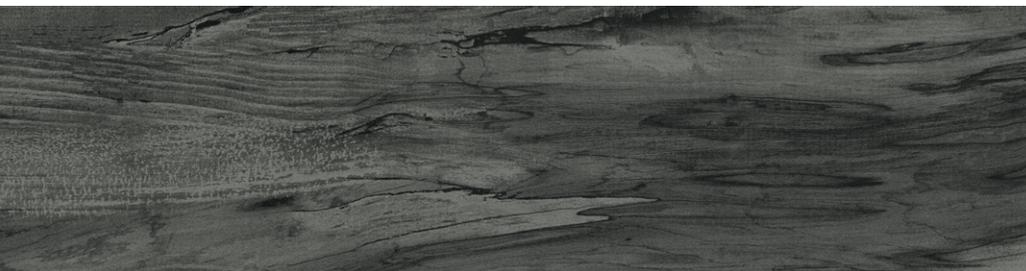

989 Temperature

M-Force™ Ultra

COMPLETE PERFORMANCE SYSTEM FOR LVT

M-Force Ultra is a combination of the finish layer, wear layer and design layer. We develop each layer individually for optimal performance, and then we bond the layers in a proprietary process that makes their performance exponentially greater together. As a result, your floor looks better longer, with superior protection against scratches, stains, dents and wear, all while providing a crisp, clear visual and easy maintenance.

PERFORMANCE FOR LIFE


- M-Force™ provides exceptional scratch, puncture and stain resistance for lasting beauty.
- Easy to clean and maintain, M-Force™ provides greater stain and soil protection.

WARRANTY

- M-Force Ultra flooring carries a limited 20-year commercial warranty.

M-Force™ Ultra

A synergy of three components bonded together into one high-performance flooring solution.

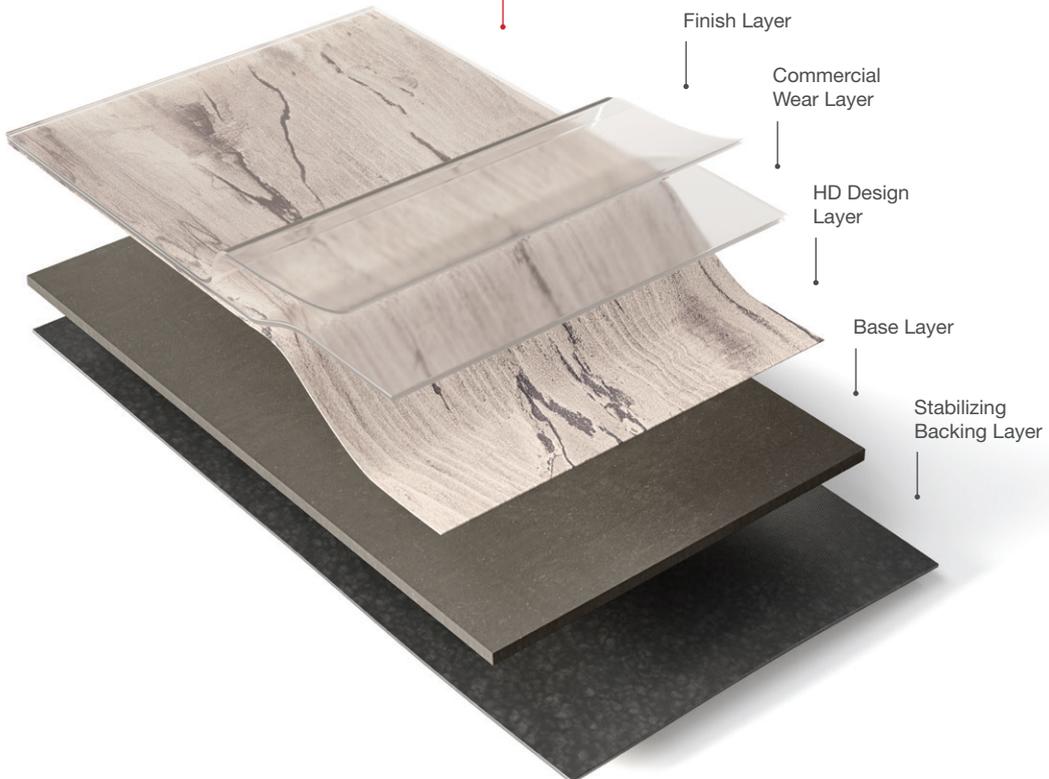



Zone Lines, 945 Oxygen, Rigid Click 6mm, Random
Mycobiome, 939 Blue Roundhead (shown as rug)

Lindsey Holcomb



To explore the theme of Taking Root, we commissioned a work from Lindsey Holcomb, an artist with the ArtLifting platform. ArtLifting champions artists who are impacted by housing insecurity or disabilities.

A passionate artist and advocate, Lindsey is an inspiration for those living with Multiple Sclerosis and chronic illness. She creates works in a variety of mediums, from alcohol ink to cyanotype printing to encaustic. She is proudly neurodivergent, as mirrored by her style.

In *Above | Below*, Lindsey incorporates natural inks that she created with ingredients foraged from Pacific Northwest forests. She evokes a mycelium network through her use of white thread on a white background: “It invites the viewer to contemplate the intricacies of the natural world, both seen and unseen.” As Lindsey explains, “*Above | Below* is a celebration of the beauty and complexity of our dynamic environment, and a reminder of the importance of preserving and protecting it.”



Each time you specify from collections in our ArtLifting partnership, we're donating to Susan G. Komen through our Specify for a Cure program. Join us in leveraging the power of art to bring people together and uplift our communities.



Specifications

Zone Lines - Flex 2.5mm (C2084)

Zone Lines - Flex 4.5mm (C2085)

DESIGN

Product Type	Luxury Vinyl Tile - Flexible
Overall Thickness	2.5mm 4.5mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Colors	5
Size	
Flex 2.5mm Actual	7.72" x 51.97"
Flex 2.5mm Nominal	8" x 52"
Flex 4.5mm Actual	9.25" x 59"
Flex 4.5mm Nominal	9" x 59"
Emboss	Overall
Bevel	Micro Bevel
Installation & Adhesive	Glue Down
Packaging	
Flex 2.5mm	36.68 oz per pc / 13 pcs per carton / 36.22 sq ft per carton
Flex 4.5mm	90 oz per pc / 7 pcs per carton / 19.5 sq ft per carton

For detailed adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Flexible Luxury Vinyl Tile
Classification	ASTM F1700 - Class III, Type B - Embossed
Squareness	ASTM F2421 - Passes - ± 0.10 " max
Size and Tolerance	ASTM F2421 - Passes - ± 0.016 "/linear foot
Thickness	ASTM F386 - Passes, as specified $\pm .005$ "
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes, $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 - Meets, 450 or less

SUSTAINABILITY

Recycled Content	100% Pre-Consumer
Certification	FloorScore® Certified
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	Limited 20 Year M-Force™ Ultra Commercial
------------	---

For detailed warranty information visit mohawkgroup.com

Zone Lines - SPC Rigid (C2086)

DESIGN

Product Type	Luxury Vinyl Tile - Rigid
Overall Thickness	6mm (5mm + 1mm attached pad)
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Colors	5
Size	
Actual	7.5" x 48"
Nominal	7.5" x 48"
Emboss	Overall
Bevel	Micro Bevel
Installation & Adhesive	Floating, Click w/ attached pad
Packaging	36.8 oz per pc / 9 pcs per carton / 17.3 sq ft per carton

For detailed adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Rigid Click Luxury Vinyl Tile
Core	Solid Polymer Core (SPC)
Classification	ASTM F1700 - Class III, Type B - Embossed
Size and Tolerance	ASTM F2421 - Passes - ± 0.016 "/linear foot
Thickness	ASTM F386 - Passes, as specified $\pm .005$ "
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes, $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 - Meets, 450 or less

SUSTAINABILITY

Certification	FloorScore® Certified
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	Limited 20 Year M-Force™ Ultra Commercial
------------	---

For detailed warranty information visit mohawkgroup.com



Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

MG778 16PG BROCHR LT