



Select Step II Stone



Select Step II Stone

Select Step II Stone brings the timeless sophistication of natural stone to commercial interiors—reimagined with the lasting performance of advanced resilient technology. Each tile captures the nuanced texture and organic beauty of sanded stone, enhanced with an M-Force® Ultra finish for exceptional durability and stain resistance. With refined colorways and subtle dimensional depth, Select Step II Stone offers a versatile foundation for spaces that demand both elevated design and everyday resilience.

Cover:

Select Step II Stone Color S719 Concrete Goals,
mellowD Color 946 Awakening



Select Step Stones II S948 On the Rocks-Carpet Tile- Base Layer color 989 Rooted and 868 yarrow



Select Step II Stone GLUE DOWN LVT

PERFORMANCE

- 3mm overall thickness and 0.5mm commercial wear layer for superior durability
- M-Force® finish for stain and wear resistance
- Select Step II Stone tiles are available in 45.72 cm x 91.44 cm
- Rigorously tested under ASTM standards to maintain precise fit and form over time
- Class 1 critical radiant flux rating for fire resistance and low smoke density performance
- FloorScore® Certified
- Limited 20 Year Commercial Warranty



Select Step II Stone S818 Nature's Influence, 948 On the Rocks

Select Step II Stone Colorways

45.72 cm x 91.44 cm




S719 Concrete Goals



S818 Nature's Influence




S878 Clean Slate

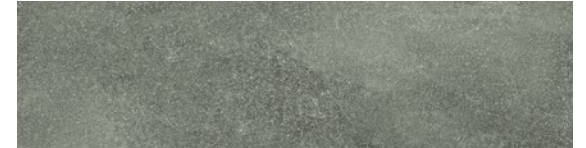

S829 Riverside



S939 Stone Cold

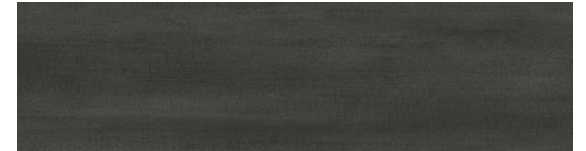

S945 Stepping Stone



S948 On the Rocks



S959 Taken of Granite



Specifications SELECT STEP II STONE (CR704)

DESIGN

Size	45.72 cm x 91.44 cm
Total Thickness	3mm
Wear Layer	0.5mm
Finish	M-Force® Ultra
Colors Available	8
Edge	Micro Bevel
Packaging	3.34 m ² and 19.05 kg per carton
Texture	Sanded Stone Emboss

PERFORMANCE

Construction	Commercial Grade Dry Back Enhanced Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - 0.10" max
Size and Tolerance	ASTM F2055 - Passes - ± 0.016 "/linear foot
Thickness	ASTM F386 - Passes - Nominal ± 0.005 "
Flexibility	AASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - ≤ 0.024 "/linear foot
Static Load Limit	ASTM F970 - Passes, modified at 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Resistance to Chemicals	ASTM F925 - Passes - No change or Slight Change
Resistance to Light	ASTM F1515 - Passes - $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Passes - ≥ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Passes - Less than 450

SUSTAINABILITY

Certification	FloorScore® Certified
---------------	-----------------------

SERVICE

Warranty	Limited 20 year commercial warranty
----------	-------------------------------------



Mohawk Group



Mohawk Group
Rm 802-809, The Place
No. 100 Zunyi Road
Shanghai, China
200336
86 21 8026 7000