



Select Step II Wood



Select Step II Wood

Select Step II Wood collection captures the warmth and character of natural wood with the performance resilience today's commercial environments demand. Each plank showcases rich grain variation and subtle texture, brought to life through advanced embossing and the protective strength of M-Force® Ultra finish. Designed for versatility and lasting beauty, Select Step II Wood delivers timeless style, enduring durability, crafted to elevate every space where design and performance meet.



Cover:

Select Step II Wood W738 Ice Dreams

Select Step II Wood W859 Cozy | Field of View Dark 959



Select Step II Wood GLUE DOWN LVT

PERFORMANCE

- 3mm overall thickness and 0.5mm commercial wear layer for superior durability
- M-Force® Ultra finish for stain and wear resistance
- Polish-optional surface provides easy maintenance and lower life cycle cost
- Versatile plank and tile sizes allow for a wide variety of installation designs
- Broad selection of straight-grain wood visuals in warm and cool tones
- Modern textile and stone visuals featuring sophisticated, calming neutrals
- Designed alongside our carpet collections for easy coordination
- FloorScore® Certified
- Limited 20 Year Commercial Warranty

Select Step II Wood Colorways

18.42 cm x 121.92 cm



W731 Caramel



W729 Luxe



W838 Rustic Elegance



W938 Aged Smoke



W833 Vein Narrative




W738 Ice Dreams



W858 Safe Haven



W859 Cozy

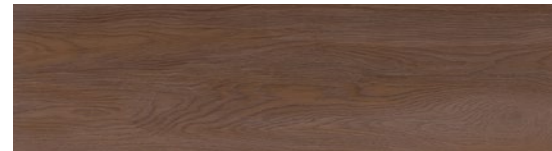

W853 Warmth



W949 Urban



W863 Heirloom



W969 Iron Ore



Select Step II Wood W938 Aged Smoke, W738 Ice Dreams, W859 Cozy



Specifications SELECT STEP II WOOD (CR703)

DESIGN

Product Type	Luxury Vinyl Tile - Flexible
Size	18.42 cm x 121.92 cm
Overall Thickness	3mm
Wear Layer	0.5mm
Finish	M-Force® Ultra
Emboss	Overall
Colors Available	12
Packaging	3.67 m ² and 19.19 kg / 15 pcs per carton

PERFORMANCE

Construction	Commercial Grade Dry Back Enhanced Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - 0.10" max
Size and Tolerance	ASTM F2055 - Passes - ± 0.016 "/linear foot
Thickness	ASTM F386 - Passes - Nominal ± 0.005 "
Flexibility	AASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - ≤ 0.024 "/linear foot
Static Load Limit	ASTM F970 - Passes, modified at 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Resistance to Chemicals	ASTM F925 - Passes - No change or Slight Change
Resistance to Light	ASTM F1515 - Passes - $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Passes - ≥ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Passes

SUSTAINABILITY

Certification	FloorScore® Certified
---------------	-----------------------

SERVICE

Warranty	Limited 20 year commercial warranty
----------	-------------------------------------



Mohawk Group



Mohawk Group
Rm 802-809, The Place
No. 100 Zunyi Road
Shanghai, China
200336
86 21 8026 7000