



Adaptive Alliance

Structured Flow Guided Grid Pixelated Path Aligned Shift



Adaptive Alliance

Inspired by the choreography of contemporary life, where built systems and human ingenuity evolve together, Adaptive Alliance crafts a dialogue between our structured and handmade worlds.

The collection meshes digital precision with the aesthetics of the human touch in all its subtle irregularity. The styles of broadloom and modular carpet are organic and tactile, with just a hint of metallic yarn. The patterns reference slow, hands-on processes and the skill of makers—qualities technology can support but never replace.

Adaptive Alliance is rooted in the spirit of *Techné*—the union of craft, practical knowledge, and thoughtful making. The result is flooring that feels dynamic and unmistakably human.

As Book One of Adaptive Alliance, these styles share their story and palette with the subtly textured styles of Book Two.



Learn more at [mohawkgroup.com](https://www.mohawkgroup.com)

Cover: Structured Flow, 934 Stone Harbor







Adaptive Alliance features two styles of modular carpet in your choice of platform: Duracolor® Tricolor fiber with EcoFlex® ONE carpet tile backing, or ColorStrand® fiber with EcoFlex® AIR carpet tile backing. The two broadloom styles are available in ColorStrand® fiber with our Weldlok® broadloom backing. No matter which product you choose, this collection is Beyond Carbon Neutral for a net-positive impact in carbon. Adaptive Alliance supports Mohawk's sustainability efforts and commitment to Net Zero carbon emissions by 2040, sustaining a better ecological community.



Duracolor Tricolor's new innovative modified-delta shape and optical core optimize color clarity, strength, stain resistance, and soil hiding and removal. As a result, Duracolor Tricolor delivers the ultimate synthesis of brilliant color and unsurpassed performance.

EcoFlex® ONE

Harnessing proven technology and advanced materials, EcoFlex® ONE delivers an all-in-one solution for optimal flooring performance and reduced costs, while supporting greater wellness for people and planet.



Since 2022, all Mohawk Group commercial products are beyond carbon neutral plus an additional 5% handprint, for a net-positive impact on the environment.



For over 15 years ColorStrand® fiber has continually exceeded expectations. With unsurpassed colorfastness and EcoSentry Plus Soil® and Stain Protector, it delivers both lasting beauty and value.

Weldlok®

Weldlok is Mohawk Group's standard broadloom backing system. It can be enhanced with OnGuard and AIR to meet project demands for moisture barriers and/or attached cushions.

EcoFlex® AIR

The next evolution in cushion backed carpet tile, EcoFlex® AIR offers substantial moisture management, sound reduction and enhanced comfort under foot.

ADDITIONAL FEATURES

- LEED, WELL & LBC Eligible
- CRI Green Label Plus
- NSF 140 Platinum (Duracolor)
- NSF 140 Gold (ColorStrand)
- Declare Red List Free








Guided Grid, 636 Hillside

Colorways BROADLOOM

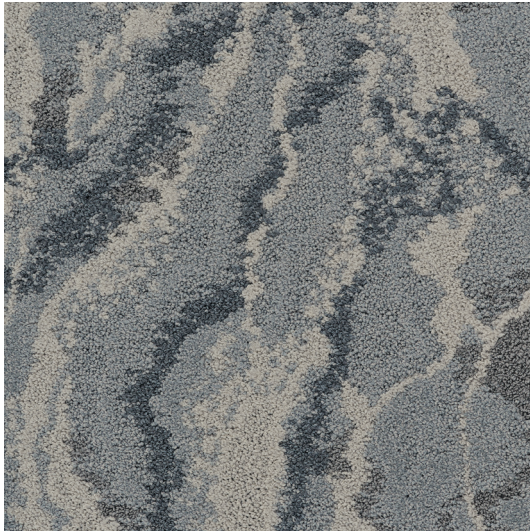


Structured Flow, 525 Ocean Spray




Guided Grid, 525 Ocean Spray


One broadloom style traces flowing, intuitive paths. The other style layers soft grids of color to create a distinctly tactile, organic experience. Colorways shown in Structured Flow.




525 Ocean Spray



548 Riverside



636 Hillside




822 Sundance




838 Pier




934 Stone Harbor



938 Cascade



959 Inlet



985 Nightwater



Colorways CARPET TILE




Pixelated Path, 934 Pearl Haze




Aligned Shift, 934 Pearl Haze


Each style of 24" x 24" carpet tile merges digital precision with an organic sense of movement, creating a beautifully balance foundation for spaces. Colorways shown in Aligned Shift.




525 Blue Mist



548 Mystic Bay



636 Oakmoss




822 Honey Wheat




838 Truffle



934 Pearl Haze



938 Granite



959 London Fog



985 Midnight



Aligned Shift, 934 Pearl Haze
Brick Ashlar



Trail and Trace (12CBED48) Broadloom, 934 Stone Harbor - 250 SY minimum



Charted Path (12CMEG23) Carpet Tile, 548 Mystic Bay - 250 SY minimum



Fray Point (12CBEB87) Broadloom, 838 Pier - 250 SY minimum





Constructed Touch (12CBEC62) Broadloom, 822 Sundance



Makers Field (12CBDY20) Broadloom, 548 Riverside - 250 SY minimum



Fleeting Form (12CMEG36) Carpet Tile, 838 Truffle - 250 SY minimum



Whispering Spectrum (12CBEC46) Broadloom, 525 Ocean Spray - 250 SY minimum



Systemic Craft (12CBEB86) Broadloom, 938 Cascade - 250 SY minimum



Boundless Contour (12CBED53) Broadloom, 959 Inlet
Assembled Woods Planked LVT, 931 Windy Oak



Living Lattice (12CMEE59) Carpet Tile, 525 Blue Mist - 250 SY minimum



Composed Matter (12CBEE51) Broadloom, 985 Nightwater - 250 SY minimum



Transient Tides (12CBDZ20) Broadloom, 838 Pier
Assembled Woods Planked LVT, 128 Goldenrod Oak



Quiet Interruption (12CBEC02) Broadloom, 636 Hillside - 250 SY minimum



Natural Mapping (12CMEG53) Carpet Tile, 934 Pearl Haze - 250 SY minimum

Specifications BROADLOOM

Structured Flow (BC631)

Guided Grid (BC632)

DESIGN

Width	12' width (3.66 m)
Pattern Repeat	
Structured Flow	72" (W) x 140.6" (L)
Guided Grid	36" (W) x 60.4" (L)
Surface Appearance	Textured Patterned Cut & Loop
Fiber Type	ColorStrand® SD Nylon
Dye Method	Solution Dyed
Colors Available	9

PERFORMANCE

Construction	Tufted (Pattern Perfect)
Gauge	1/12" (47.00 rows per 10 cm)
Tufted Weight	
Structured Flow	42 oz/yd ² (1,424 g/m ²)
Guided Grid	40 oz/yd ² (1,356 g/m ²)
Stain Release Technology	EcoSentry Plus Stain Protection
Soil Release Technology	EcoSentry Soil Protection
Backing Material	Weldlok®
Flammability	ASTM E 648 - Class 1 Glue Down
Smoke Density	ASTM E 662 - Less than 450
Static Propensity	AATCC 134 - Under 3.5 KV

SUSTAINABILITY

Certification	Declare Red List Free
Indoor Air Quality	Green Label Plus Certified
NSF 140	Gold
Carbon	Net Positive Carbon (Neutral +5%)

SERVICE

Warranties	Lifetime Limited Wear Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
------------	---

Mohawk Group warrants its adhesives for the life of the original installation only when a Mohawk Group style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. The use of Mohawk branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com



Specifications

CARPET TILE | DURACOLOR® WITH ECOLFLEX® ONE

Pixelated Path (GT443)
Aligned Shift (GT460)

DESIGN

Size	24" x 24" (.6096 m x .6096 m)
Surface Appearance	Textured Patterned Cut & Loop
Fiber Type	Duracolor® Tricor Premium Nylon
Dye Method	Solution Dyed
Colors Available	9

PERFORMANCE

Construction	Tufted (Pattern Perfect)
Gauge	1/12" (47.00 rows per 10 cm)
Tufted Weight	22 oz/yd ² (746 g/m ²)
Stain Release Technology	Permanent, Built into the Fiber
Soil Release Technology	EcoSentry Soil Protection
Backing Material	EcoFlex® ONE
Flammability	ASTM E 648 - Class 1 Glue Down
Smoke Density	ASTM E 662 - Less than 450
Static Propensity	AATCC 134 - Under 3.5 KV



SUSTAINABILITY

Certification	Declare Red List Free
Indoor Air Quality	Green Label Plus Certified
NSF 140	Platinum
Carbon	Net Positive Carbon (Neutral +5%)
Water	Net Positive Water (Neutral +5%)

SERVICE

Warranties	Lifetime Limited Carpet Tile Warranty, Lifetime Static, Lifetime Limited Duracolor® Stain Warranty
------------	---

Installation Instructions:



Elemental Edges
Wall Base

Elemental Edges is a portfolio of architectural and cove wall base for your finishing needs. Featuring a range of colors that coordinate with our full product line, Elemental Edges also offers 14 Quickship colors in cove wall base.



Specifications

CARPET TILE | COLORSTRAND® WITH ECOFLEX® AIR

Pixelated Path (BT637)
Aligned Shift (BT638)

DESIGN

Size	24" x 24" (.6096 m x .6096 m)
Surface Appearance	Textured Patterned Cut & Loop
Fiber Type	ColorStrand® SD Nylon
Dye Method	Solution Dyed
Colors Available	9

PERFORMANCE

Construction	Tufted (Pattern Perfect)
Gauge	1/12" (47.00 rows per 10 cm)
Tufted Weight	22 oz/yd ² (746 g/m ²)
Stain Release Technology	EcoSentry Plus Stain Protection
Soil Release Technology	EcoSentry Soil Protection
Backing Material	EcoFlex® AIR
Flammability	ASTM E 648 - Class 1 Glue Down
Smoke Density	ASTM E 662 - Less than 450
Static Propensity	AATCC 134 - Under 3.5 KV


SUSTAINABILITY

Certification	Declare Red List Free
Indoor Air Quality	Green Label Plus Certified
NSF 140	Gold
Carbon	Net Positive Carbon (Neutral +5%)
Water	Net Positive Water (Neutral +5%)

SERVICE

Warranties	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
------------	--

Installation Instructions:



RECOVER
 RECYCLING PROGRAM

Through Mohawk's ReCover Recycling Program over 160 million pounds of flooring has been diverted from landfills and giving a second life. We accept flooring from any manufacturer and will manage your entire recycling process.



Produced with recycled materials



Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

MS/16 0005 8830-8111