



Better Together

Better Together

Better Together luxury vinyl tile creates beautifully unique flooring designs, whether used on its own or as a perfect system with Mohawk Group carpet tile. From the neutral palette and range of refined visuals down to the carefully chosen dimensions, Better Together can be mixed and matched easily with any carpet tile selection or among any of its colorways, giving you endless design potential.



Cover:

Better Together 766 Bonafide |
Field of view Dark 868 Nuance

Better Together 711 Linen | Concrete Bloom 739 Birdsong Light

Better Together GLUE DOWN LVT

PERFORMANCE

- 5mm thickness allows seamless flow from hard surface flooring to carpet without use of transitions
- 0.5mm wear layer for superior durability
- M-Force® Ultra
- Range of modular sizes allow unique and creative installations – 10.16 cm x 91.44 cm, 30.48 cm x 91.44 cm, 20.32 cm x 121.92 cm and 60.96 cm x 60.96 cm – all designed to work with Mohawk Group carpet tile
- Better Together glue down installation – use MS160 Spray Adhesive, M95.0 Adhesive, or M700 PSA
- Better Together with Mohawk Carpet tile – EnPress adhesive may be used for both products
- FloorScore® Certified
- 20 Year Commercial Warranty




Better Together | 955 Fresco Stone


Colorways

Better Together luxury vinyl tile brings hard and soft surface flooring together in perfect harmony.


10.16 cm x 91.44 cm




30.48 cm x 91.44 cm

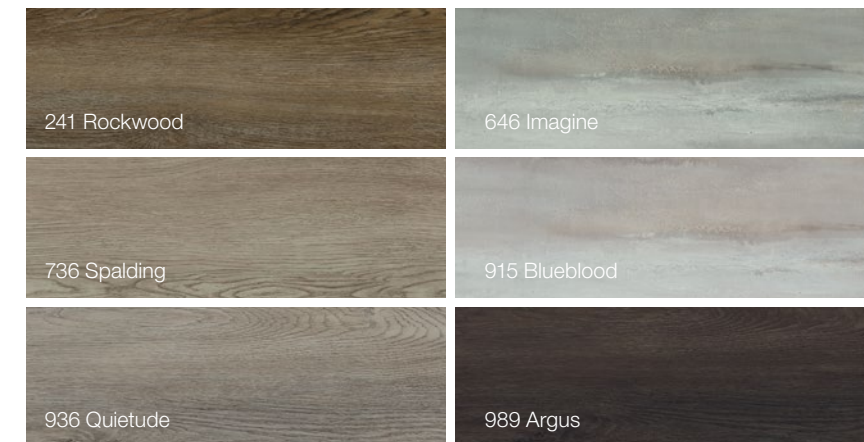

20.32 cm x 121.92 cm

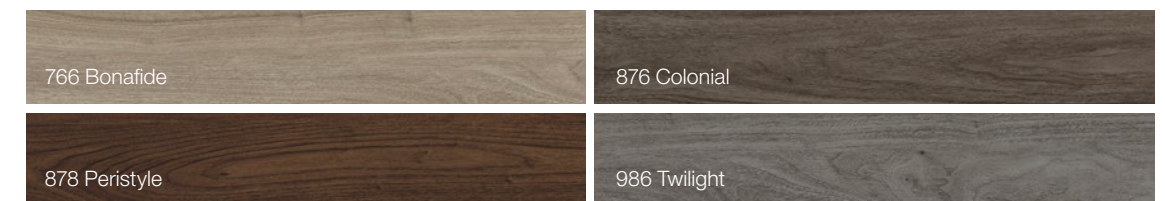

60.96 cm x 60.96 cm

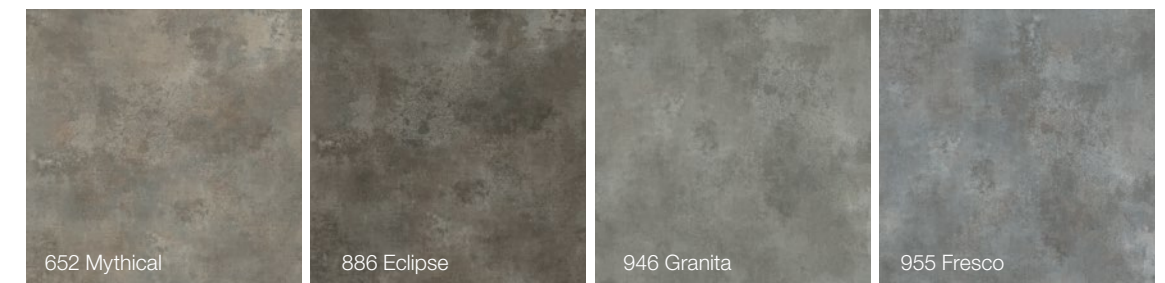

Specifications BETTER TOGETHER (C0097)

DESIGN

Overall Gauge	5mm
Wear Layer	0.5mm
Finish	M-Force® Ultra
Texture	Emboss
Sizes / Colors Available	10.16 cm x 91.44 cm - 2 Colors 20.32 cm x 121.92 cm - 4 Colors 30.48 cm x 91.44 cm - 6 Colors 60.96 cm x 60.96 cm - 4 Colors
Packaging	10.16 cm x 91.44 cm 1.49 m ² /ctn; 16 pcs/ctn 20.32 cm x 121.92 cm 1.49 m ² /ctn; 6 pcs/ctn 30.48 cm x 91.44 cm 1.67 m ² /ctn; 6 pcs/ctn 60.96 cm x 60.96 cm 1.49 m ² /ctn; 4 pcs/ctn
Installation	Glue Down
Required Adhesive	MS160 Spray Adhesive, M95.0 Resilient Flooring Adhesive, M700 Pressure Sensitive Adhesive
Alternate Adhesive	Mohawk EnPress Adhesive (single adhesive may be used for Better Together and Mohawk Group carpet tile when used in combined installation).

PERFORMANCE

Construction	Commercial Grade Enhanced Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2421 - Passes - ±0.10" max
Size and Tolerance	ASTM F2421 - Passes - ±0.16"/linear foot
Thickness	ASTM F386 - Passes - as specified ±0.005"
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Slip Resistance	ASTM C1028 - Passes - Wet: ≥ 0.5
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes - ΔE < 8
Resistance to Heat	ASTM F1514 - Passes - ΔE < 8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450

SUSTAINABILITY

Certification	FloorScore® Certified
---------------	-----------------------

SERVICE

Warranty	20 Year Commercial Warranty
----------	-----------------------------



Mohawk Group



Mohawk Group
Rm 802-809, The Place
No. 100 Zunyi Road
Shanghai, China
200336
86 21 8026 7000