



Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA, 30701
800.554.6637
mohawkgroup.com

Hot & Heavy II

Transfiguration 2.5 Transfiguration 5.0 Mycotexture 2.5 Mycotexture 5.0



Transfiguration and Mycotexture

Inspired by our deep connection to nature and the grown world, Transfiguration 2.5 | 5.0 and Mycotexture 2.5 | 5.0 explore design elements drawn from mycelium and mushrooms, offering styles that support unique biophilic design strategies.

Transfiguration 2.5 | 5.0 provides the aesthetic of polished concrete infused with the early stages of underground mycelium growth. Mycotexture 2.5 | 5.0 is inspired by the microscopic details and intricacies of structures found within mushrooms.

As part of the Hot & Heavy II collection, Transfiguration and Mycotexture are available in both 5.0mm and 2.5mm thicknesses to deliver installation advantages that save time and reduce cost. The 5.0 thickness can be installed with a loose-lay method; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive.

Available in 18" x 36" tiles, Transfiguration and Mycotexture provides spaces with an inspiring and unique connection to our natural world.



Learn more at mohawkgroup.com

Cover: Mycotexture 2.5 | 5.0, 949 Root
Curious Clusters, 585 Bottom of a Well





Ultra Performance and Worry-Free Solutions for Any Project

Hot & Heavy II styles are available in two thicknesses, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. All products are designed with a 20 mil heavy commercial wear layer and our premium M-Force™ Ultra technology, which delivers a complete performance system for LVT.

M-Force™ Ultra

Hot & Heavy II features our M-Force™ Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Quicker Installation

The 5.0 thickness can be installed loose-lay; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive. No wet-set installation needed.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.




Styles from the Hot & Heavy II Collection are the only LVT products on the market to be NFSI Certified Slip Resistant in wet conditions.



2.5MM FLEX

Reducing installation time and costs, no transition strips are needed between the 2.5mm platform and EcoFlex™ Matrix backed carpet tile products. The 2.5mm tiles use the same releasable adhesive as the 5.0mm tiles. No wet-set installation is needed.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



5.0MM FLEX

Reducing installation time and costs, no transition strips are needed between the 5.0mm platform and EcoFlex™ ONE or EcoFlex™ AIR backed carpet tile products. The 5.0mm tiles may be installed loose-lay; areas larger than 20' in any direction require a perimeter spread of releasable adhesive.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



Mycotexture 2.5 | 5.0, 848 Sawdust

Mohawk Group



Transfiguration 2.5 | 5.0, 969 Alter





Transfiguration

COLORWAYS

In neutral colors that evoke concrete, Transfiguration 2.5 | 5.0 features areas of biomorphic patterning inspired by mycelium networks. The subtle, organic forms are also reminiscent of the expressive turkey tail mushroom.



825 Reshape



828 Modify



859 Variation



929 Shift



969 Alter

Mycotexture

COLORWAYS


Mycotexture 2.5 | 5.0 find visual inspiration in the branching and fusing of mycelium as well as the cellular structure of mushrooms. The colorways draw on mushroom dyes, echoing their natural sunbaked colors.



539 Trunk



555 Growth

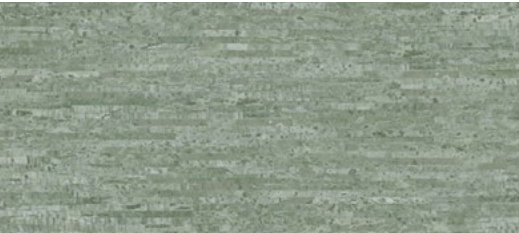

646 Earth



818 Sunlight



835 Heartwood



842 Mulch



848 Sawdust



868 Bark




949 Root



979 Topsoil



Lindsey Holcomb

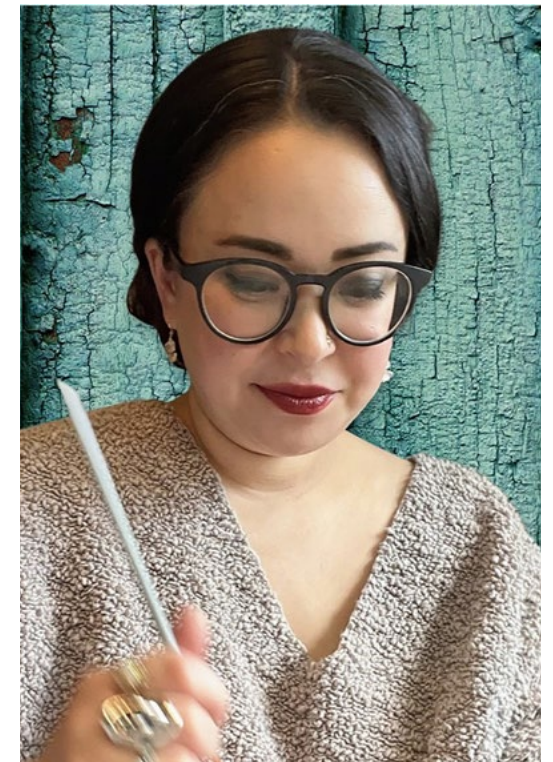

To explore the theme of mycelium growth, we commissioned a work from Lindsey Holcomb, an artist with the ArtLifting platform. ArtLifting champions artists who are impacted by housing insecurity or disabilities.

A passionate artist and advocate, Lindsey is an inspiration for those living with Multiple Sclerosis and chronic illness. She creates works in a variety of mediums, from alcohol ink to cyanotype printing to encaustic. She is proudly neurodivergent, as mirrored by her style.

In Above | Below, Lindsey incorporates natural inks that she created with ingredients foraged from Pacific Northwest forests. She evokes a mycelium network through her use of white thread on a white background: “It invites the viewer to contemplate the intricacies of the natural world, both seen and unseen.” As Lindsey explains, “Above | Below is a celebration of the beauty and complexity of our dynamic environment, and a reminder of the importance of preserving and protecting it.”





Specifications

Transfiguration 2.5mm (C2087)
Transfiguration 5.0mm (C2123)
Mycotexture 2.5mm (C2089)
Mycotexture 5.0mm (C2125)

DESIGN

Product Type	Luxury Vinyl Tile - Flexible
Overall Thickness	2.5mm 5.0mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Colors	
Transfiguration	5
Mycotexture	10
Size	
Actual	18" x 36"
Nominal	18" x 36"
Emboss	Overall
Edge Profile	Squared Edge
Installation & Adhesive	2.5mm Glue Down 5.0mm Loose Lay
Packaging	
2.5mm	12 pcs per carton / 54 sq ft per carton
5.0mm	6 pcs per carton / 27sq ft per carton

For detailed adhesive and installation information
visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Flexible Luxury Vinyl Tile
Classification	ASTM F1700 - Class III, Type B - Embossed
Squareness	ASTM F2421 - Passes - ±0.10" max
Size and Tolerance	ASTM F2421 - Passes - ±0.016"/linear foot
Thickness	ASTM F386 - Passes, as specified ± .005"
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes, ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 - Meets, 450 or less
Slip Resistance	NFSI B101.1/B101.3 Slip Resistant Certified

SUSTAINABILITY

Certification	FloorScore® Certified
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	Limited 20 Year M-Force™ Ultra Commercial
------------	---

For detailed warranty information visit mohawkgroup.com



RECOVER
RECYCLING PROGRAM

Give your old flooring a second life with our award-winning ReCover Recycling Program. We will take away flooring made by any manufacturer, recycle it for you, and provide a certificate showing your positive impact on the planet.



Running Line Rug Program

Unlock your creative freedom with our innovative Running Line Rug Program. Dive in and explore our carefully curated styles, mix and match colors, sizes, and edge treatments to create the perfect rug for your space.



Elemental Edges WALL BASE

Elemental Edges is a portfolio of architectural and cove wall base for your finishing needs. Featuring a range of colors that coordinate with our full product line, Elemental Edges also offers 14 stocked colors in cove wall base.

