

Neutral Timber 2.5 | 5.0


In busy spaces, calm can be a powerful design choice. Neutral Timber 2.5 | 5.0 brings that sense of quiet balance to commercial interiors, with oak visuals that are refined, linear, and understated. Free from knots and prominent graining, the look remains clean and serene—never competing for attention, always grounding the environment.

Neutral Timber 2.5 | 5.0 is ideal for creating seamless continuity across spaces. As part of the Hot & Heavy II collection, the style is available in 2.5mm and 5.0mm thicknesses, which eliminates the need for transition strips to any of our carpet tile products. For even easier coordination, the palette was designed to harmonize with our latest soft surface collections.

design solutions, Neutral Timber 2.5 | 5.0 steadies the spaces it inhabits. A quiet



Delivering calm aesthetics and thoughtful foundation for a world in motion. Learn more at mohawkgroup.com Cover: Neutral Timber 2.5, 811 Canvas Oak, 828 Harvest Oak, 868 Umber Oak

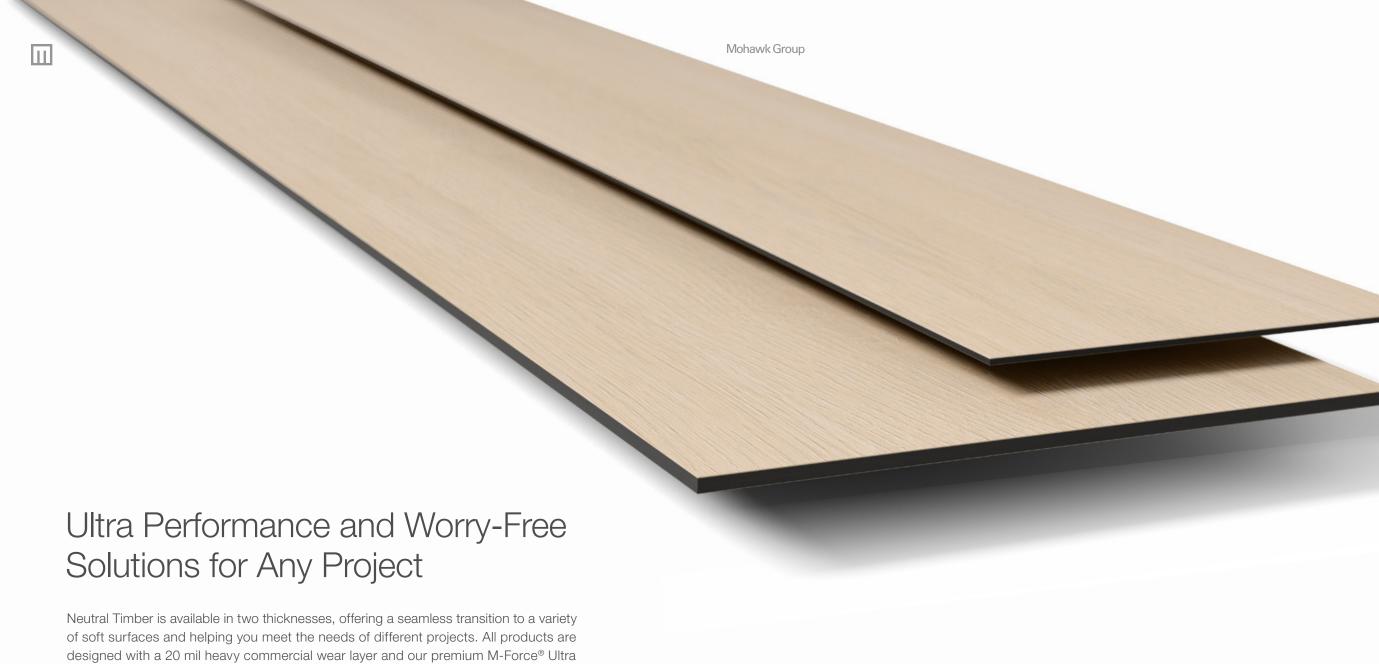

technology, which delivers a complete performance system for LVT.

M-Force® Ultra

Hot & Heavy II features our M-Force® Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Quicker Installation

The 5.0 thickness can be installed loose-lay; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive. No wet-set installation needed.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.



2.5MM FLEX

Reducing installation time and costs, no transition strips are needed between the 2.5mm platform and EcoFlex® Matrix backed carpet tile products. The 2.5mm tiles use the same releasable adhesive as the 5.0mm tiles. No wet-set installation is needed.

- May contribute toward LEED/WELL
- No ortho-phthalates
- UL certified EPD

■ FloorScore® certified for low VOCs



5.0MM FLEX

Reducing installation time and costs, no transition strips are needed between the 5.0mm platform and EcoFlex® ONE or EcoFlex® AIR backed carpet tile products. The 5.0mm tiles may be installed loose-lay; areas larger than 20' in any direction require a perimeter spread of releasable adhesive. The added thickness reduces telegraphing of subfloor imperfections.

- May contribute toward LEED/WELL
- UL certified EPD

- No ortho-phthalates
- FloorScore® certified for low VOCs





Neutral Timber 2.5, 917 Cloud Oak



Colorways

From warm undertones to cooler neutrals, the seven colorways of Neutral Timber $2.5 \mid 5.0$ work seamlessly with any project palette. The tones also coordinate with our carpet collections, allowing a unified design language across spaces with different flooring types.







828 Harvest Oak





848 Cocoa Oak

868 Umber Oak






917 Cloud Oak

949 Smoked Oak



979 Midnight Oak



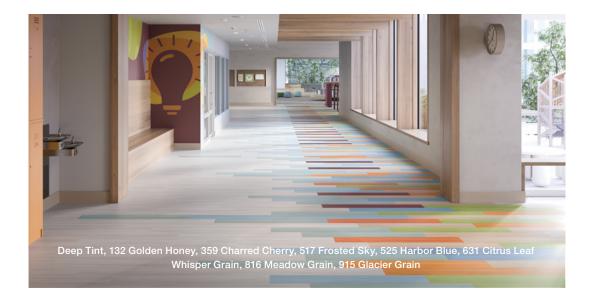

Tinted Timber COORDINATING COLLECTION

Expand your palette into colorful dimensions by pairing Neutral Timber 2.5 with its sister collection, Tinted Timber. The two styles of Tinted Timber offer oak visuals with subtle to saturated infusions of color, bringing creative expression to any space.





Elemental Edges WALL BASE

Elemental Edges is a portfolio of architectural and wall base for your finishing needs. Featuring a range of colors that coordinate with our full product line, Elemental Edges also offers 14 stocked colors in cove wall base.



Specifications

Neutral Timber 2.5mm (C2138) Neutral Timber 5.0mm (C2139)

DESIGN

Size

2.5mm Actual

Product Type Luxury Vinyl Tile - Flexible

Overall Thickness 2.5mm 5.0mm Wear Layer 20 mil (0.5mm) M-Force® Ultra Finish

Colors

2.5mm Nominal 7" x 48" 5.0mm Actual 9.84" x 59.60" 5.0mm Nominal 10" x 60"

Emboss Overall Edge Profile Squared Edge Installation & Adhesive 2.5mm Glue Down

5.0mm Loose Lay Packaging

2.5mm 18 pcs per carton / 41.994 sq ft per carton / 60 ctns per pallet 5.0mm 6 pcs per carton / 24.22 sq ft per carton / 68 ctns per pallet

7" x 48"

For detailed adhesive and installation information

visit mohawkgroup.com

PERFORMANCE

Construction Commercial Flexible Luxury Vinyl Tile Classification ASTM F1700 - Class III, Type B - Embossed ASTM F2421 - Passes - ±0.10" max Squareness Size and Tolerance ASTM F2421 - Passes - ±0.016"/linear foot Thickness ASTM F386 - Passes, as specified \pm .005" ASTM F137 - Passes - 1" mandrel Flexibility Dimensional Stability ASTM F2199 - Passes - 0.020"/linear foot max

Static Load Limit ASTM F970 - Passes, modified at 1000 psi

Residual Indentation ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%

ASTM F925 - Passes - No more than a slight change Resistance to Chemicals ASTM F1515 - Passes, ∆E ≤ 8 Resistance to Light

Resistance to Heat ASTM F1514 - Passes, ∆E ≤ 8 ASTM E648 - Class 1 (>0.45 W/cm2) Critical Radiant Flux ASTM E662 - Meets, 450 or less Smoke Density

SUSTAINABILITY

Certification FloorScore® Certified

Carbon Net-Positive Carbon (Neutral +5%)

Recycled Content

SERVICE

Warranties Limited 20 Year M-Force® Ultra Commercial

For detailed warranty information visit mohawkgroup.com



REC~VER

Give your old flooring a second life with our award-winning ReCover Recycling Program. We will take away flooring made by any manufacturer, recycle it for you, and provide a certificate showing your positive impact on the planet.



