



Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA, 30701
800.554.6637
mohawkgroup.com

Hot & Heavy II

Terrazzo 2.5 Terrazzo 5.0



Terrazzo 2.5 | 5.0

Terrazzo is a classic flooring material in the built environment with its prolific use in modernist design contrasting with its humble beginnings in Italy. In recent years, terrazzo has experienced a renaissance, taking on new shapes, forms, and formats. Terrazzo 2.5 | 5.0 brings a playful twist to this classic material by infusing the biophilic visual with colorful accents inspired by the digital world.

Part of the Hot & Heavy II collection, Terrazzo LVT is available in both 5.0mm and 2.5mm thicknesses to deliver installation advantages that save time and reduce cost. The 5.0 thickness can be installed with a loose-lay method; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive.

Available in 18" x 36" tiles and fresh colorways, put your own spin on time-honored style with Terrazzo 2.5 | 5.0.



Learn more at mohawkgroup.com

Cover:
Terrazzo 2.5 | 5.0, 735 Sodalite, 948 Crag
Chromascope 2.5 | 5.0, 650 Serene Navy



Terrazzo 2.5 | 5.0, 939 Lime




Terrazzo 2.5 | 5.0, 726 Verdant, 948 Crag, 957 Gabbro
Chromascope 2.5 | 5.0, 676 Celestial Forest




Mohawk Group

Colorways

In 12 versatile colorways, Terrazzo 2.5 | 5.0 offers easy coordination with a wide variety of Mohawk Group flooring products. The neutral base colors make it simple to mix colorways or bring pops of color into natural-hued spaces.




725 Calcite




726 Verdant




727 Grit




735 Sodalite




838 Citrine




858 Breccia




939 Lime



941 Shale




948 Crag



957 Gabbro




977 Diorite



989 Jet

Terrazzo 2.5 | 5.0, 725 Calcite
Substratum, Base Layer, 957 Freshwater

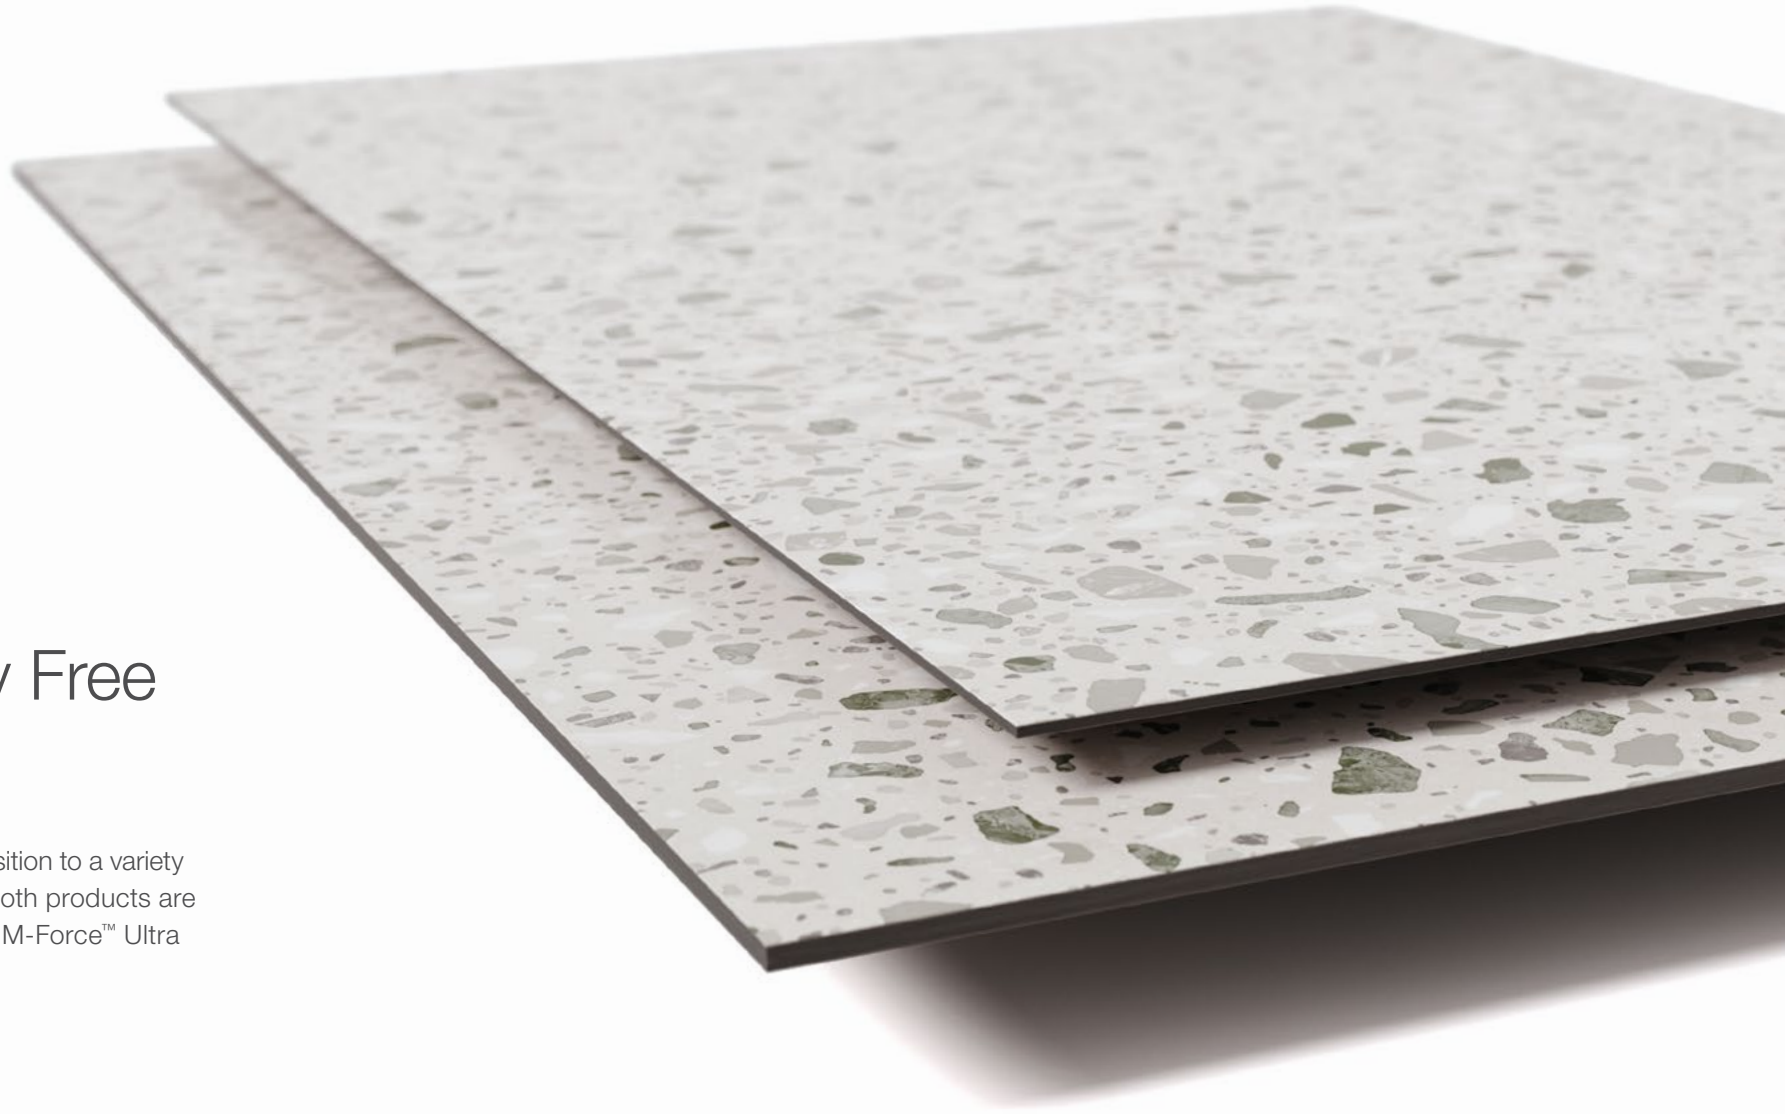

Ultra Performance and Worry Free Solutions for Any Project

Terrazzo 2.5 | 5.0 is available in two thicknesses, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. Both products are designed with a 20 mil heavy commercial wear layer and our premium M-Force™ Ultra technology, which delivers a complete performance system for LVT.

M-Force™ Ultra

Hot & Heavy II features our M-Force™ Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Quicker Installation

The 5.0 thickness can be installed loose-lay; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive. No wet-set installation needed.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.



Styles from the Hot & Heavy II Collection are the only LVT products on the market to be NFSI Certified Slip Resistant in wet conditions.



2.5MM FLEX

Reducing installation time and costs, no transition strips are needed between the 2.5mm platform and EcoFlex™ Matrix backed carpet tile products. The 2.5mm tiles use the same releasable adhesive as the 5.0mm tiles. No wet-set installation is needed.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



5.0MM FLEX

Reducing installation time and costs, no transition strips are needed between the 5.0mm platform and EcoFlex™ ONE or EcoFlex™ AIR backed carpet tile products. The 5.0mm tiles may be installed loose-lay; areas larger than 20' in any direction require a perimeter spread of releasable adhesive.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



Running Line Rug Program

Unlock your creative freedom with our innovative Running Line Rug Program. Dive in and explore our carefully curated styles, mix and match colors, sizes, and edge treatments to create the perfect rug for your space.



Elemental Edges WALL BASE

Elemental Edges is a portfolio of architectural and cove wall base for your finishing needs. Featuring a range of colors that coordinate with our full product line, Elemental Edges also offers 14 stocked colors in cove wall base.



Specifications

Terrazzo 2.5mm (C2126)
Terrazzo 5.0mm (C2127)

DESIGN

Product Type	Luxury Vinyl Tile - Flexible
Overall Thickness	2.5mm 5.0mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Colors	12
Size	18" x 36"
2.5mm Actual	18" x 36"
5.0mm Actual	Overall
Emboss	Squared Edge
Edge Profile	2.5mm Glue Down
Installation & Adhesive	5.0mm Loose Lay

Packaging	12 pcs per carton / 54 sq ft per carton
2.5mm	6 pcs per carton / 27 sq ft per carton
5.0mm	

For detailed adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Flexible Luxury Vinyl Tile
Classification	ASTM F1700 - Class III, Type B - Embossed
Squareness	ASTM F2421 - Passes - ±0.10" max
Size and Tolerance	ASTM F2421 - Passes - ±0.016"/linear foot
Thickness	ASTM F386 - Passes, as specified ± .005"
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes, ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 - Meets, 450 or less
Slip Resistance	NFSI B101.1/B101.3 Slip Resistant Certified

SUSTAINABILITY

Certification	FloorScore® Certified
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	Limited 20 Year M-Force™ Ultra Commercial
	For detailed warranty information visit mohawkgroup.com



RECOVER
RECYCLING PROGRAM

Through Mohawk's ReCover Recycling Program over 160 million pounds of flooring has been diverted from landfills and giving a second life. We accept flooring from any manufacturer and will manage your entire recycling process.

