



Hot & Heavy

Secoya Bolder



Bold, contemporary aesthetics of hardwood and polished concrete gain new versatility in the Hot & Heavy Collection of loose-lay enhanced resilient tile. The oversize format of both styles provides striking visual impact as well as rapid installation in large, open-concept spaces.

Secoya Bolder

Secoya explores warm and cool tones of richly grained hardwood visuals in a substantial 9"x59" plank. Bolder grounds spaces with deep taupes and grays in a polished concrete visual and hefty 36"x36" tile.







Bolder 925 Pebble, 888 Schist





Bolder 832 River Rock, 888 Schist, Intercosmic 868 Stellar

Earth To Sky

Inspired by aerial photography of raw, natural environments, the Earth to Sky carpet tile collection enables you to create subtle landscapes of tonal and textural shifts. Impressionist patterns in 24"x24" and 12"x36" tiles explore chromatic palettes highlighted with lustrous metallic yarns. The biophilic design of Earth to Sky brings the depths of the earth and farthest reaches of the atmosphere to your inspired spaces.



Metagalactic

Available as 12"x36" tiles, Metagalactic features a metallic accent recalling mineral deposits in natural earthworks.



Living World

Mimicking natural landscapes, Living World is available as a 24"x24" tile.



Intercosmic

Adapted from the marble patterns that occur in many stones, Intercosmic is available in a 24"x24" tile.

FEATURES

- 9 colorways using metallic yarn accents for increased color depth and dimension
- Duracolor® Premium Nylon
- Backed with EcoFlex NXT
- Installs with FlexLok™ Tabs
- NSF/ANSI 140 Gold
- Declared Red List Free
- Minimum 38% Recycled Content



Intercosmic 859 Ethereal



Secoya Colorways



123 Benmore



142 Kew Gardens



148 Atwell Mill



152 Arrowhead Creek



833 Oakbark



872 Picton Park



878 Woodland



936 Converse Basin



946 Open Canyon



989 Calaveras

Bolder Colorways



832 River Rock



888 Schist



925 Pebble



999 Onyx





Secoya & Bolder LOOSE LAY ERT

PERFORMANCE


- Mottled concrete and hardwood visuals create stunning and unique installations
- Oversized 36" x 36" tiles and 9" x 59" planks install over large areas quickly
- 5mm overall thickness and 20 mil commercial wear layer for superior durability
- M-Force™ Enhanced Urethane finish for stain and wear resistance
- Twice as thick as traditional ERT for seamless transition with Mohawk Group carpet tiles
- Non-skid backing keeps tiles in place
- 59% Recycled Content (37% pre-consumer and 22% post-consumer content)

LOOSE LAY ERT CONSTRUCTION

Hot & Heavy loose lay enhanced resilient tile features a 20 mil commercial wear layer, M-Force™ Enhanced Urethane and polish-optional finish for versatile, cost-effective maintenance. The weight of the product and the unique non-skid backing texture allows for loose lay installation.

LOOSE LAY SELLING FEATURES

- Install with Mohawk recommended adhesives and Mohawk AccuSound™ underlayment for improved sound absorption.

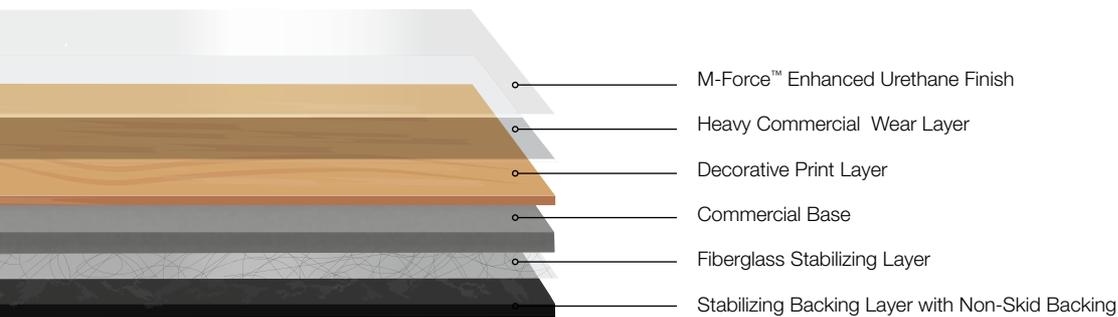

Specifications

Secoya C0009 Bolder C0010

DESIGN

Size	
Secoya	9.25" W x 59.25" L (235mm x 1505mm)
Bolder	36" W x 36" L (914.4mm x 914.4mm)
Overall Gauge	.20" (5mm)
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Enhanced Urethane
Colors Available	
Secoya	10
Bolder	4
Installation	Perimeter or Full Spread Adhesive
Packaging	
Secoya	22.84 sqft per carton / 6 pcs per carton / 40.77 lbs per carton
Bolder	36 sqft per carton / 4 pcs per carton / 63.48 lbs per carton

PERFORMANCE

Construction	Commercial Grade Loose Lay Enhanced Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance	ASTM F2055 - Passes - ±0.016 in. per linear foot
Thickness	ASTM F386 - Passes - As Specified ±0.005 in.
Flexibility	ASTM F137 - Passes - ≤ 1.0 in., no cracks or breaks
Dimensional Stability	ASTM F2199 - Passes - ≤ 0.020 in. per linear foot
Static Load Limit	ASTM F970 - Passes, modified - 1000 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Resistance to Chemicals	ASTM F925 - Passes - No Change
Resistance to Light	ASTM F1515 - Passes - ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes - ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Passes - ≥ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Passes - < 450

SUSTAINABILITY

Certification	FloorScore® Certified
Recycled Content	59% Recycled Content: 37% pre-consumer and 22% post-consumer content

