

Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

MG797 12PG BROCHR LT



Hot & Heavy II

Bolder 2.5 Bolder 5.0

Bolder 2.5 | 5.0

Elevate your design with Hot and Heavy II Bolder 2.5 or Bolder 5.0 18”x 36” concrete, stone and metallic look tiles. Available in two thicknesses to cater to various installation needs, the tiles come in a range of neutral colors, from soft greys and taupe to deep charcoals. Hot and Heavy II offers a sleek and modern aesthetic that complements any space with timeless sophistication.

Learn more at mohawkgroup.com



Cover: Bolder 2.5 | 5.0, 838 Dune, 848 Flint



Bolder 2.5 | 5.0, 959 Shine





Bolder 2.5 | 5.0, 832 Bronze



Secoya 2.5 | 5.0, 828 Honey Maple; Bolder 2.5 | 5.0, 938 Silk



Bolder 2.5 | 5.0, 949 Lava

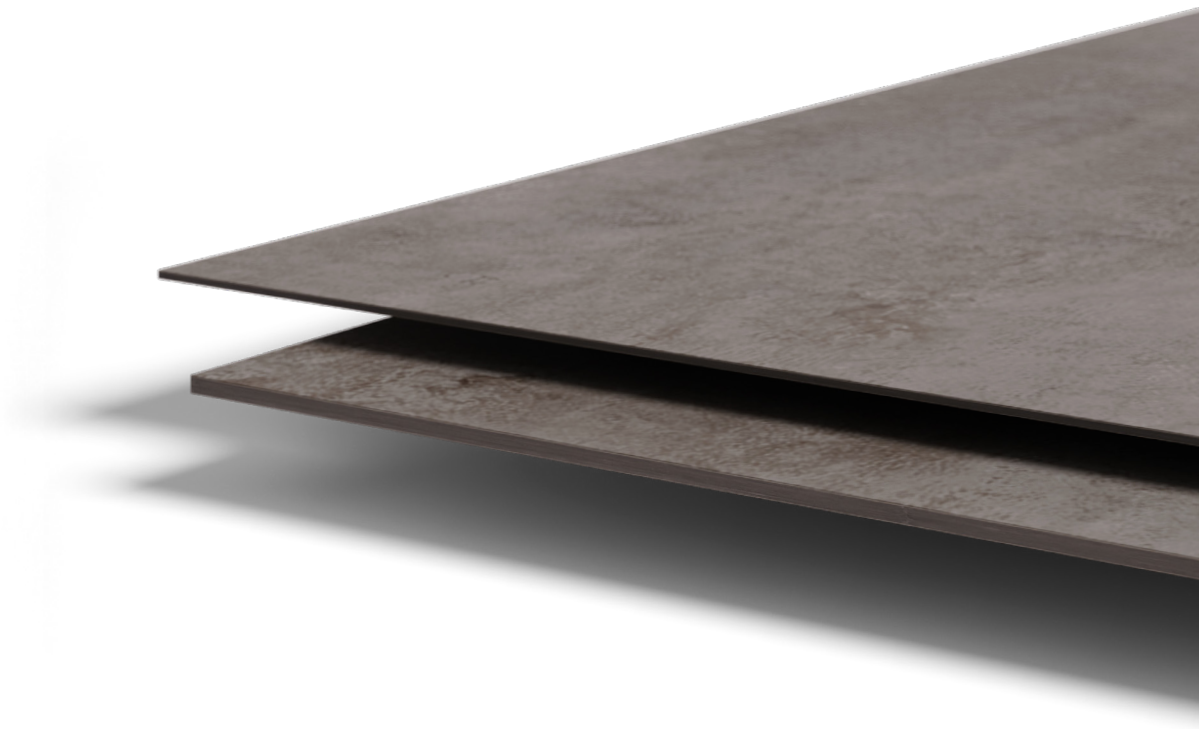

Ultra Performance and Worry Free Solutions for Any Project

Bolder 2.5 | 5.0 is available in two thicknesses, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. The products are designed with a 20 mil heavy commercial wear layer and our premium M-Force Ultra technology, which delivers a complete performance system for LVT.

M-Force™ Ultra

Hot & Heavy II features our M-Force Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Beyond Carbon Neutral +5

All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.

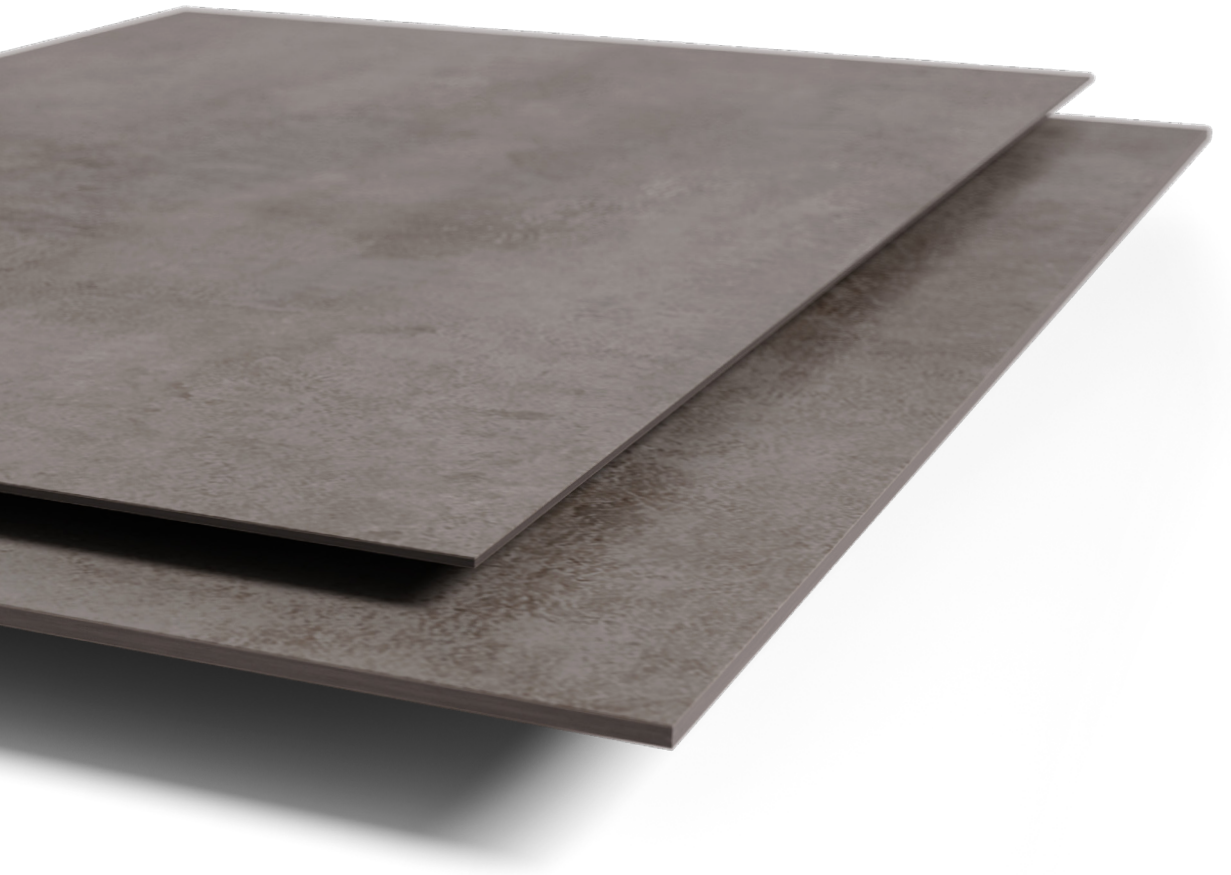



2.5MM FLEX

No transition strips needed between the 2.5mm platform and EcoFlex™ Matrix backed carpet tile products, reducing installation time and costs.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



5.0MM FLEX

No transition strips needed between the 5.0mm platform and EcoFlex™ ONE or EcoFlex™ AIR backed carpet tile products, reducing installation time and costs.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs

Bolder 2.5 | 5.0 COLORWAYS

Stone & Concrete


832 Bronze


838 Dune


848 Flint


925 Slate


938 Silk


949 Lava


969 Obsidian

Metallics


269 Inferno


859 Aura


929 Celestial


959 Shine

Specifications

Bolder 2.5mm (C2107)
Bolder 5.0mm (C2108)

DESIGN

Product Type	Luxury Vinyl Tile - Flexible
Overall Thickness	2.5mm 5.0mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Colors	11
Size	
Actual	18” x 36”
Nominal	18” x 36”
Emboss	Overall
Bevel	Micro Bevel
Installation & Adhesive	2.5mm Glue Down 5.0mm Loose Lay
Packaging	
Flex 2.5mm	12 pcs per carton / 54 sq ft per carton
Flex 5.0mm	6 pcs per carton / 27sq ft per carton
	For detailed adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Flexible Luxury Vinyl Tile
Classification	ASTM F1700 - Class III, Type B - Embossed
Squareness	ASTM F2421 - Passes - ±0.10” max
Size and Tolerance	ASTM F2421 - Passes - ±0.016”/linear foot
Thickness	ASTM F386 - Passes, as specified ± .005”
Flexibility	ASTM F137 - Passes - 1” mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020”/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes, $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 - Meets, 450 or less
Slip Resistance	NFSI B101.1/B101.3 Slip Resistant Certified

SUSTAINABILITY

Certification	FloorScore® Certified
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	Limited 20 Year M-Force™ Ultra Commercial
	For detailed warranty information visit mohawkgroup.com