



Mohawk Group

Mohawk Group  
160 South Industrial Blvd.  
Calhoun, GA. 30701  
800.554.6637  
mohawkgroup.com

MG797 12PG BROCHR LT

## Hot & Heavy II

Bolder 2.5 Bolder 5.0





## Bolder 2.5 | 5.0

Elevate your designs with Hot & Heavy II Bolder 2.5 or Bolder 5.0 18"x 36" tiles. Available in two thicknesses, the tiles offer concrete and metallic visuals in a range of neutral colors, from soft greys and taupes to deep charcoals. Bolder 2.5 and Bolder 5.0 create a sleek, modern aesthetic and timeless sophistication in any space.

Hot & Heavy II is designed to deliver installation advantages that save time and reduce cost. Bolder 5.0 can be installed with a loose-lay method, eliminating the need for adhesive in smaller spaces; larger areas need only a perimeter spread of releasable adhesive. Bolder 2.5 can be installed with the same releasable adhesive. Neither thickness requires a wet-set installation. Whichever thickness you choose, Hot & Heavy II makes it easier to achieve a stunning floor.



Learn more at [mohawkgroup.com](https://mohawkgroup.com)

Cover: Bolder 2.5 | 5.0, 838 Dune, 848 Flint

Bolder 2.5 | 5.0, 959 Shine











Mohawk Group




Secoya 2.5 | 5.0, 828 Honey Maple; Bolder 2.5 | 5.0, 938 Silk



Bolder 2.5 | 5.0, 949 Lava



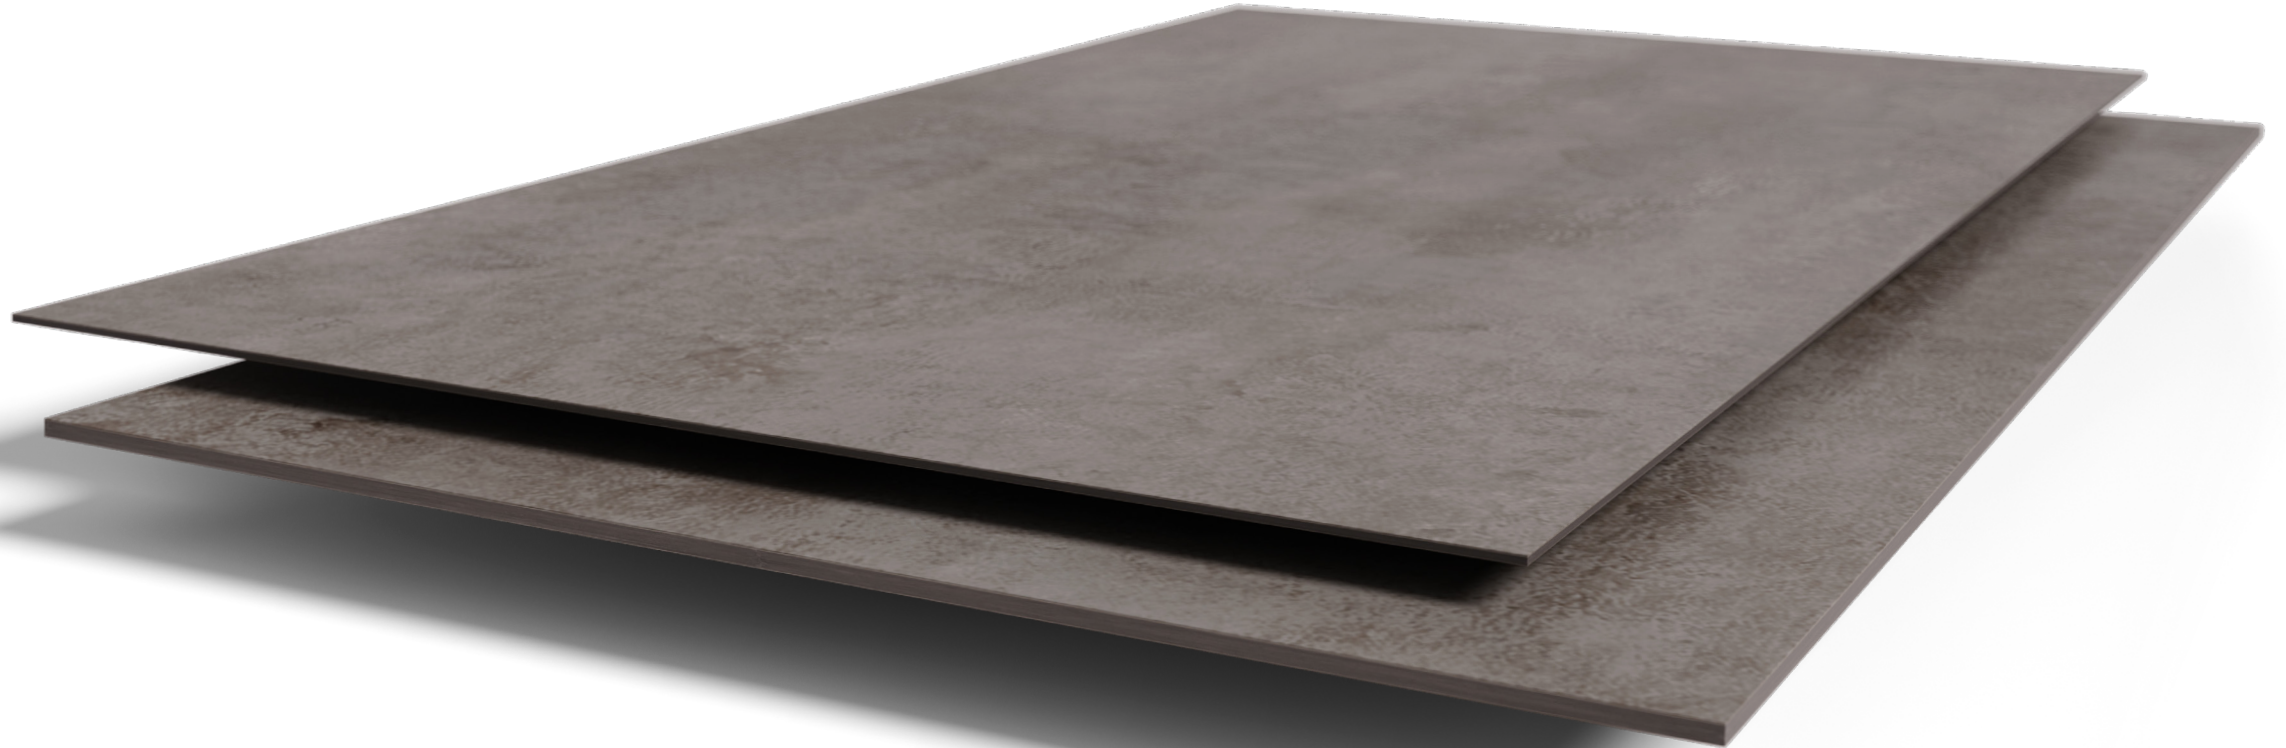

## Ultra Performance and Worry Free Solutions for Any Project

Bolder 2.5 | 5.0 is available in two thicknesses, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. The products are designed with a 20 mil heavy commercial wear layer and our premium M-Force Ultra technology, which delivers a complete performance system for LVT.

### M-Force™ Ultra

Hot & Heavy II features our M-Force Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

### Quicker Installation

The 5.0 thickness can be installed loose-lay; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive. No wet-set installation needed.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.



#### 2.5MM FLEX

Reducing installation time and costs, no transition strips are needed between the 2.5mm platform and EcoFlex™ Matrix backed carpet tile products. The 2.5mm tiles use the same releasable adhesive as the 5.0mm tiles. No wet-set installation is needed.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



#### 5.0MM FLEX

Reducing installation time and costs, no transition strips are needed between the 5.0mm platform and EcoFlex™ ONE or EcoFlex™ AIR backed carpet tile products. The 5.0mm tiles may be installed loose-lay; areas larger than 20' in any direction require a perimeter spread of releasable adhesive.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs







# Bolder 2.5 | 5.0

COLORWAYS


Concrete




832 Bronze




838 Dune




848 Flint




925 Slate



938 Silk




949 Lava




969 Obsidian


Metallics




269 Inferno



859 Aura



929 Celestial



959 Shine

# Specifications

**Bolder 2.5mm** (C2107)  
**Bolder 5.0mm** (C2108)

DESIGN

Product Type	Luxury Vinyl Tile - Flexible
Overall Thickness	2.5mm 5.0mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Colors	11
Size	
Actual	18" x 36"
Nominal	18" x 36"
Emboss	Overall
Bevel	Straight Edge
Installation & Adhesive	2.5mm Glue Down 5.0mm Loose Lay
Packaging	
Flex 2.5mm	12 pcs per carton / 54 sq ft per carton
Flex 5.0mm	6 pcs per carton / 27sq ft per carton

For detailed adhesive and installation information  
visit [mohawkgroup.com](https://mohawkgroup.com)

PERFORMANCE

Construction	Commercial Flexible Luxury Vinyl Tile
Classification	ASTM F1700 - Class III, Type B - Embossed
Squareness	ASTM F2421 - Passes - ±0.10" max
Size and Tolerance	ASTM F2421 - Passes - ±0.016"/linear foot
Thickness	ASTM F386 - Passes, as specified ± .005"
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes, ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 - Meets, 450 or less

SUSTAINABILITY

Certification	FloorScore® Certified
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	Limited 20 Year M-Force™ Ultra Commercial
------------	---

For detailed warranty information visit [mohawkgroup.com](https://mohawkgroup.com)