



Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA, 30701
800.554.6637
mohawkgroup.com

MG793 12PG BROCHR LT

Hot & Heavy II

Secoya 2.5 Secoya 5.0



Secoya 2.5 | 5.0

Transform your space with Secoya 2.5 | 5.0 from the Hot & Heavy II collection. Available in two versatile thicknesses and plank sizes, this rich wood-grain LVT offers a stunning array of color tones. With serene hues of light oak to the luxurious depths of amber maple, Secoya 2.5 | 5.0 planks bring natural beauty and elegance to every space.

Hot & Heavy II is also designed to deliver installation advantages that save time and reduce cost. Secoya 5.0 can be installed with a loose-lay method, eliminating the need for adhesive in smaller spaces; larger areas need only a perimeter spread of releasable adhesive. Secoya 2.5 can be installed with the same releasable adhesive. Neither thickness requires a wet-set installation. Whichever thickness you choose, Hot & Heavy II makes it easier to achieve a stunning floor.



Learn more at mohawkgroup.com

Cover:
Secoya 2.5 | 5.0, 848 Hazelnut Oak

Secoya 2.5 | 5.0, 848 Hazelnut Oak








Secoya 2.5 | 5.0, 828 Honey Maple; Bolder 2.5 | 5.0, 938 Silk

Mohawk Group

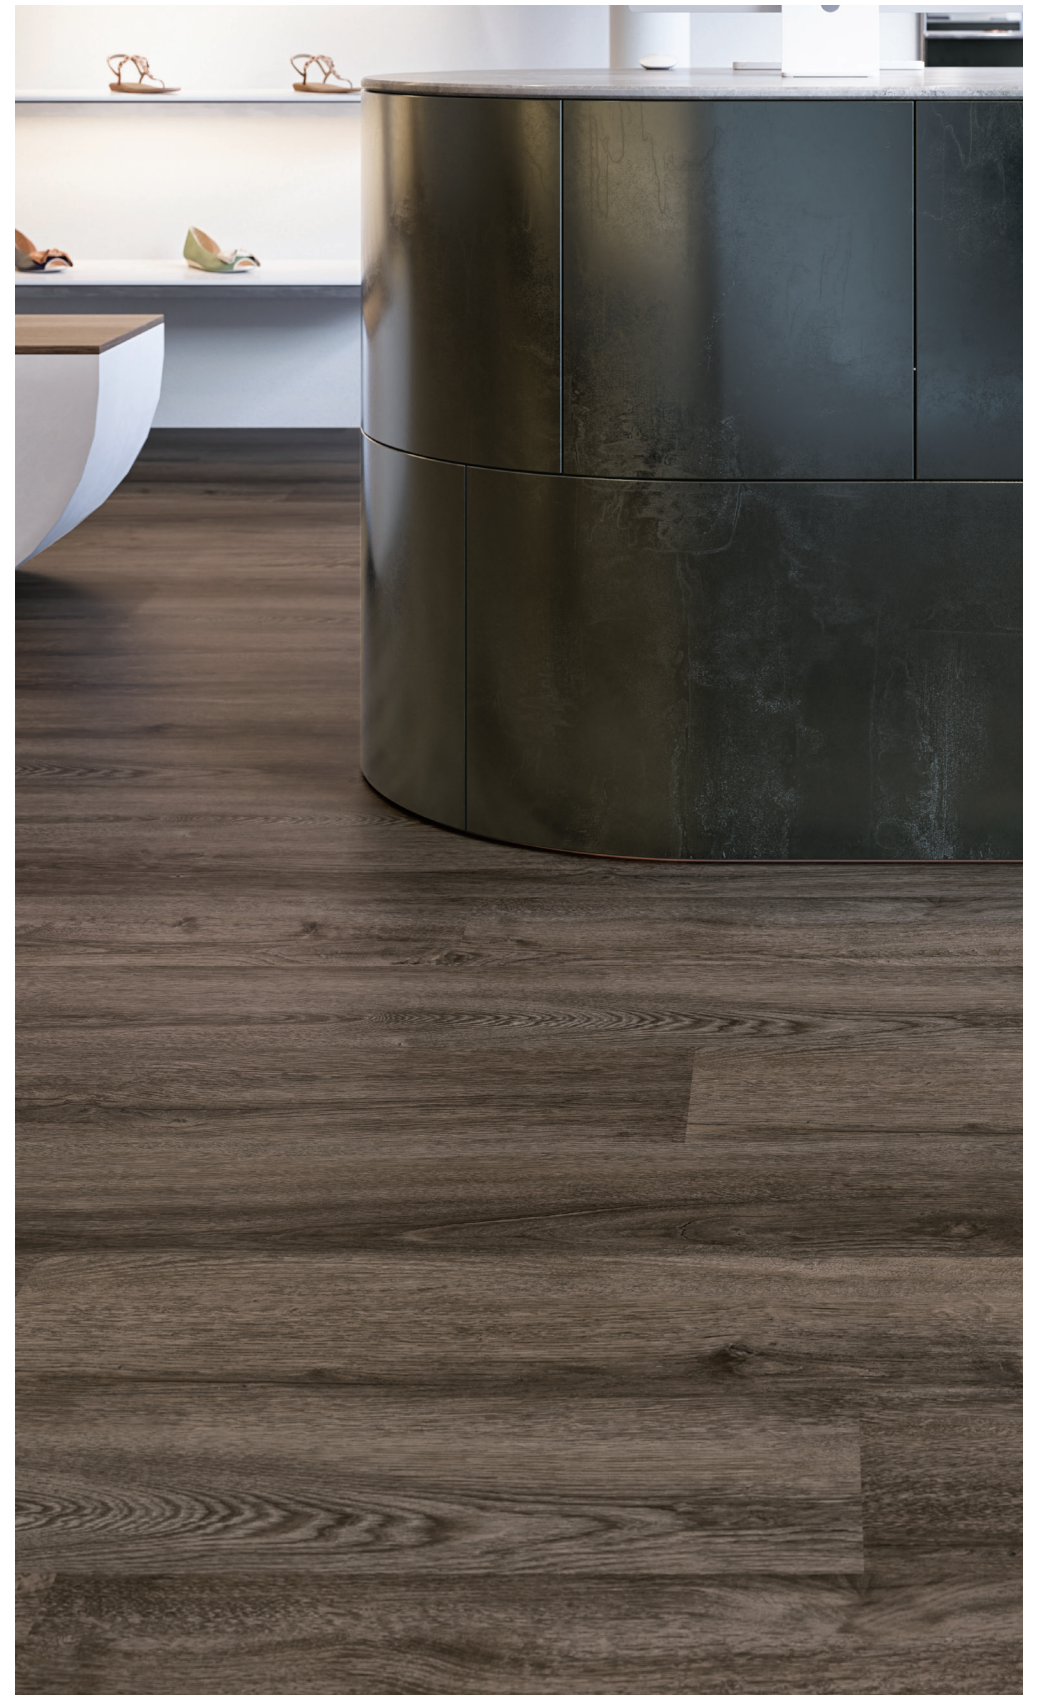

Secoya 2.5 | 5.0, 872 Toasted Oak



Ultra Performance and Worry Free Solutions for Any Project

Secoya 2.5 | 5.0 is available in two thicknesses, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. The products are designed with a 20 mil heavy commercial wear layer and our premium M-Force Ultra technology, which delivers a complete performance system for LVT.

M-Force™ Ultra

Hot & Heavy II features our M-Force Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Quicker Installation

The 5.0 thickness can be installed loose-lay; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive. No wet-set installation needed.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.



2.5MM FLEX

Reducing installation time and costs, no transition strips are needed between the 2.5mm platform and EcoFlex™ Matrix backed carpet tile products. The 2.5mm planks use the same releasable adhesive as the 5.0mm planks. No wet-set installation is needed.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs




5.0MM FLEX

Reducing installation time and costs, no transition strips are needed between the 5.0mm platform and EcoFlex™ ONE or EcoFlex™ AIR backed carpet tile products. The 5.0mm planks may be installed loose-lay; areas larger than 20' in any direction require a perimeter spread of releasable adhesive.


- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



Secoya 2.5 | 5.0 COLORWAYS




142 Caramel Oak




148 Knotty Oak




717 Pure Maple



727 Frosted Oak




738 Phantom Oak




818 Sandy Oak



821 Chai Oak



828 Honey Maple




838 Toffee Oak



842 Amber Maple



848 Hazelnut Oak



868 Stable Oak



872 Toasted Oak



917 Chimney Oak



928 Storm Oak



936 Mystic Oak



939 Rustic Oak

Specifications

Secoya 2.5mm (C2103)

Secoya 5.0mm (C2104)

DESIGN

Product Type	Luxury Vinyl Tile - Flexible
Overall Thickness	2.5mm 5.0mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Colors	17
Size	7" x 48" 10" x 59" 9.84" x 59.6"
Emboss	Overall
Bevel	Micro Bevel
Installation & Adhesive	2.5mm Glue Down 5.0mm Loose Lay
Packaging	18 pcs per carton / 41.994 sq ft per carton 6 pcs per carton / 24.438 sq ft per carton

For detailed adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Flexible Luxury Vinyl Tile
Classification	ASTM F1700 - Class III, Type B - Embossed
Squareness	ASTM F2421 - Passes - ±0.10" max
Size and Tolerance	ASTM F2421 - Passes - ±0.016"/linear foot
Thickness	ASTM F386 - Passes, as specified ± .005"
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes, ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 - Meets, 450 or less

SUSTAINABILITY

Certification	FloorScore® Certified
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	Limited 20 Year M-Force™ Ultra Commercial
------------	---

For detailed warranty information visit mohawkgroup.com