

Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

MG793 12PG BROCHR LT



Hot & Heavy II

Secoya 2.5 Secoya 5.0

Secoya 2.5 | 5.0

Transform your space with Secoya 2.5 | 5.0 from the Hot & Heavy II collection. Available in two versatile thicknesses and plank sizes, this rich wood-grain LVT offers a stunning array of color tones. With serene hues of light oak to the luxurious depths of amber maple, these planks bring natural beauty and elegance to every space.

Learn more at mohawkgroup.com



Cover:
Secoya 2.5 | 5.0, 917 Chimney Oak



Secoya 2.5 | 5.0, 848 Hazelnut Oak





Secoya 2.5 | 5.0, 848 Hazelnut Oak



Secoya 2.5 | 5.0, 828 Honey Maple; Bolder 2.5 | 5.0, 938 Silk



Secoya 2.5 | 5.0, 872 Toasted Oak



Ultra Performance and Worry Free Solutions for Any Project

Secoya 2.5 | 5.0 is available in two thicknesses, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. The products are designed with a 20 mil heavy commercial wear layer and our premium M-Force Ultra technology, which delivers a complete performance system for LVT.

M-Force™ Ultra

Hot & Heavy II features our M-Force Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Beyond Carbon Neutral 5

All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.





2.5MM FLEX

No transition strips needed between the 2.5mm platform and EcoFlex™ Matrix backed carpet tile products, reducing installation time and costs.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs



5.0MM FLEX

No transition strips needed between the 5.0mm platform and EcoFlex™ ONE or EcoFlex™ AIR backed carpet tile products, reducing installation time and costs.

- May contribute toward LEED/WELL
- UL certified EPD
- No ortho-phthalates
- Floorscore® certified for low VOCs

Secoya 2.5 | 5.0 COLORWAYS


142 Caramel Oak

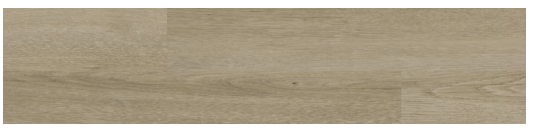

148 Knotty Oak

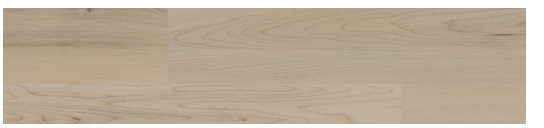

717 Pure Maple

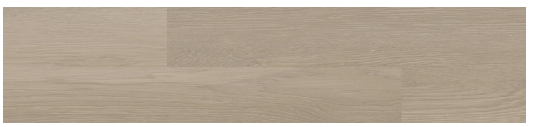

727 Frosted Oak


738 Phantom Oak

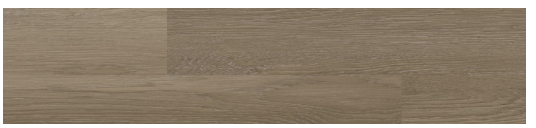

818 Sandy Oak


821 Chai Oak


828 Honey Maple


838 Toffee Oak


842 Amber Maple


848 Hazelnut Oak


868 Stable Oak


872 Toasted Oak


917 Chimney Oak


928 Storm Oak


936 Mystic Oak


939 Rustic Oak

Specifications

Secoya 2.5mm (C2103)
Secoya 5.0mm (C2104)

DESIGN

Product Type	Luxury Vinyl Tile - Flexible
Overall Thickness	2.5mm 5.0mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Colors	17
Size	
2.5mm Actual & Nominal	7” x 48”
5.0mm Nominal	10” x 59”
5.0mm Actual	9.84” x 59.6”
Emboss	Overall
Bevel	Micro Bevel
Installation & Adhesive	2.5mm Glue Down 5.0mm Loose Lay
Packaging	
2.5mm	18 pcs per carton / 41.994 sq ft per carton
5.0mm	6 pcs per carton / 24.438 sq ft per carton
	For detailed adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Flexible Luxury Vinyl Tile
Classification	ASTM F1700 - Class III, Type B - Embossed
Squareness	ASTM F2421 - Passes - ±0.10” max
Size and Tolerance	ASTM F2421 - Passes - ±0.016”/linear foot
Thickness	ASTM F386 - Passes, as specified ± .005”
Flexibility	ASTM F137 - Passes - 1” mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020”/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes, $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 - Meets, 450 or less
Slip Resistance	NFSI B101.1/B101.3 Slip Resistant Certified

SUSTAINABILITY

Certification	FloorScore® Certified
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	Limited 20 Year M-Force™ Ultra Commercial
	For detailed warranty information visit mohawkgroup.com