



Hot & Heavy Collection

Lineate



565 Strake, 588 Ridged, 646 Varigated, 656 Lines, 741 Parallel
Cover Image: 444 Stripe, 232 Barred, 565 Strake, 656 Lines, 646 Varigated, 857 Marker, 741 Parallel, 948 Figured



Lineate ERT combines ombré gradations of color with textile-like striations, resulting in a richly dimensional visual. Colors can be mixed or used singularly to create abstract, modern flooring designs. Lineate is inspired by two of the hottest trends in surface visuals: ombre/gradient and striated textile looks. Cool and warm neutrals combine with on-trend color pops and linear textures to form this versatile flooring solution. The color ebbs and flows across the plank to give the illusion of depth on a flat surface, enhancing the dimension of any space.









Lineate: 656 Lines, 741 Parallel, 948 Figured, 868 Groove | Metagalactic: 859 Ethereal

Earth To Sky Collection

Intercosmic, 859

Inspired by aerial photography of raw, natural environments, the Earth to Sky carpet tile collection creates subtle landscapes of tonal and textural shifts. Impressionist patterns in 24"x24" and 12"x36" tiles explore chromatic palettes highlighted with lustrous metallic yarns. The biophilic design of Earth to Sky brings the depths of the earth and farthest reaches of the atmosphere to your inspired spaces.



Metagalactic

Available as 12"x36" tiles, Metagalactic features a metallic accent recalling mineral deposits in natural earthworks.



Living World

Mimicking natural landscapes, Living World is available as a 24"x24" tile.



Intercosmic

Adapted from the marbled patterns that occur in many stones, Intercosmic is available in a 24"x24" tile.

- 9 colorways using metallic yarn accents for increased color depth and dimension
- Duracolor® Premium Nylon
- Backed with EcoFlex NXT
- Installs with FlexLok™ Tabs
- NSF/ANSI 140 Gold
- Declared Red List Free
- Minimum 56% Recycled Content



Lineate

Colorways



232 Barred



444 Stripe



565 Strake



588 Ridged



646 Varigated



656 Lines



741 Parallel



857 Marker



868 Groove



948 Figured



957 Cord



988 Striated

Lineate Performance


- Linear patterned registered embossed texture with ombré coloration creates high fashion loose lay ERT planks
- Oversized 9" x 59" planks install over large areas quickly
- 5mm overall thickness and 20 mil commercial wear layer for superior durability
- M-Force™ Enhanced Urethane finish for stain and wear resistance
- Inherent acoustic properties, IIC rating of 57 with drop ceiling, without underlayment
- Twice as thick as traditional ERT for seamless transition with Mohawk Group carpet tiles
- Install over slabs up to 95% RH
- Non-skid backing keeps planks in place
- 59% Recycled Content (37% pre-consumer and 22% post-consumer content)

Loose Lay ERT Construction

Construction: Hot & Heavy loose lay enhanced resilient tile features a 20 mil commercial wear layer, M-Force™ Enhanced Urethane and polish-optional finish for versatile, cost-effective maintenance. The weight of the product and the unique non-skid backing texture allows for loose lay installation. Hot & Heavy carries a 10 year commercial warranty.

Loose Lay Selling Features

- Install with Mohawk adhesives and Mohawk AccuSound™ underlayment for improved sound absorption.

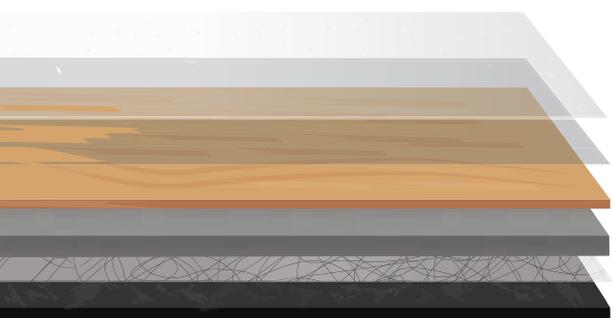

- M-Force™ Enhanced Urethane Finish
- Heavy Commercial Wear Layer
- Decorative Print Layer
- Commercial Base
- Fiberglass Stabilizing Layer
- Stabilizing Backing Layer with Non-Skid Backing

Specifications

Collection	Hot & Heavy
Style Name	Lineate
Style Number	C0089
Brand	Mohawk Group – Hard Surface
Product Type	Loose Lay Enhanced Resilient Tile



DESIGN

Overall Gauge	.20" (5mm)
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Enhanced Urethane
Colors Available	12 Colors
Size	9" W x 59" L
Packaging	22.84 sf/ctn (2.12m ² /ctn); 6 pcs/ctn; 40.78 lbs/ctn (18.49 kg/ctn)
Installation	Loose lay with perimeter glue
Required Adhesive	MS160 Spray Adhesive or M95.0 Resilient Flooring Adhesive



PERFORMANCE

Construction	Commercial Grade Loose Lay Enhanced Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2421 - Passes - $\pm 0.10"$ max
Size and Tolerance	ASTM F2421 - Passes - $\pm 0.16"/$ linear foot
Thickness	ASTM F386 - Passes - as specified $\pm 0.005"$
Flexibility	A ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Slip Resistance	ASTM C1028 - Passes - Wet: ≥ 0.5
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes - $\Delta E < 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E < 8$
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450
IIC Rating	57 (over 6" concrete and drop ceiling)



SUSTAINABILITY

Certification	FloorScore® Certified
Recycled Content	59% Recycled Content: 37% pre-consumer and 22% post-consumer



SERVICE

Warranty	Limited 10 Year Commercial Warranty
----------	-------------------------------------

Glue Down