



Molveno

Molveno Woods Molveno Stones



Beauty and brawn come together in Molveno, a rigid core collection with realistic, natural wood grains and concrete visuals to create a remarkably durable and stunning installation. Molveno Stones exude a modern but natural touch in hospitality flooring using high definition visuals. Molveno Woods offer an embossed-in-register wood grain texture and subtle color play of warm and cool tones.

Molveno Stones  
Molveno Woods

Molveno Stones feature high definition visuals with a modern, but natural touch.

Molveno Woods feature embossed-in-register wood grain visuals in subtle warm and cool tones.








Molveno Woods 858 Warmstone, Molveno Stones 988 Cityscape

# Molveno

## FEATURES

---

- 10 stunning wood colors and 5 modern stone colors
- Overall plank thickness at 6 mm w/ attached cushion
- Embossed in Register and wire brush texture wood visuals
- 20 mil wear layer provides scratch and scuff resistance
- Installs over most existing hard surface flooring
- Superior dimensional stability
- No adhesive or underlayment required
- Immediate occupancy
- FloorScore® Certified

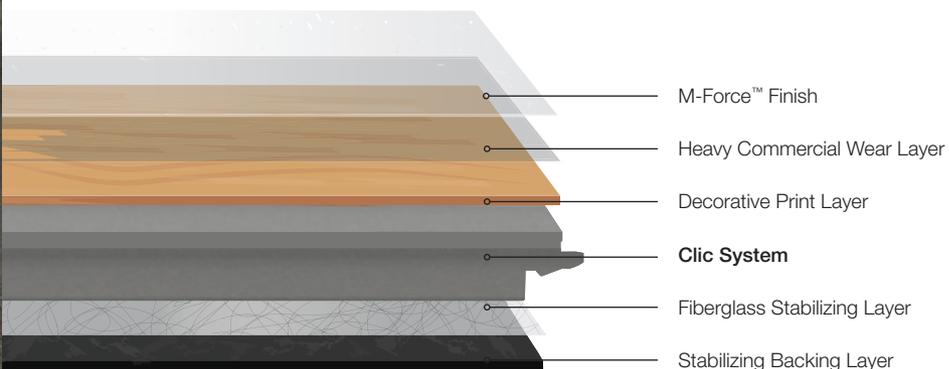



Molveno Woods 872 Jute Brown





Molveno Woods 817 Iced Mocha


# Sunweave

Sunweave woven carpet responds to current desires for artisanal materials in the built environment. Inspired by women weavers of indigenous cultures around the world, Sunweave evokes natural patterns found in baskets, blankets and textiles. Shadow Pass features a grand linear ombre shadow that transitions along the loom and, therefore, the floor plane. Sunweave features our new innovative yarn system, Heathered Hues. This fiber's natural texture and blending provides a variegated wool-like appearance. The yarn is dematerialized for a low environmental impact, and no water is used in its production. Sunweave is Red List Free and designed to achieve the stringent requirements of the Living Product Challenge Petal Certification.

## FEATURES

---

- Product Type: Broadloom
- Construction: Woven
- Duracolor® Premium Nylon
- Colors available: 4
- Size: 12' width (3.66m)
- Stain Release Technology: Permanent, Built into the Fiber
- Soil Release Technology: Sentry Soil Protection
- Living Product Challenge Petal Certified
- Green Label Plus Certified #3802

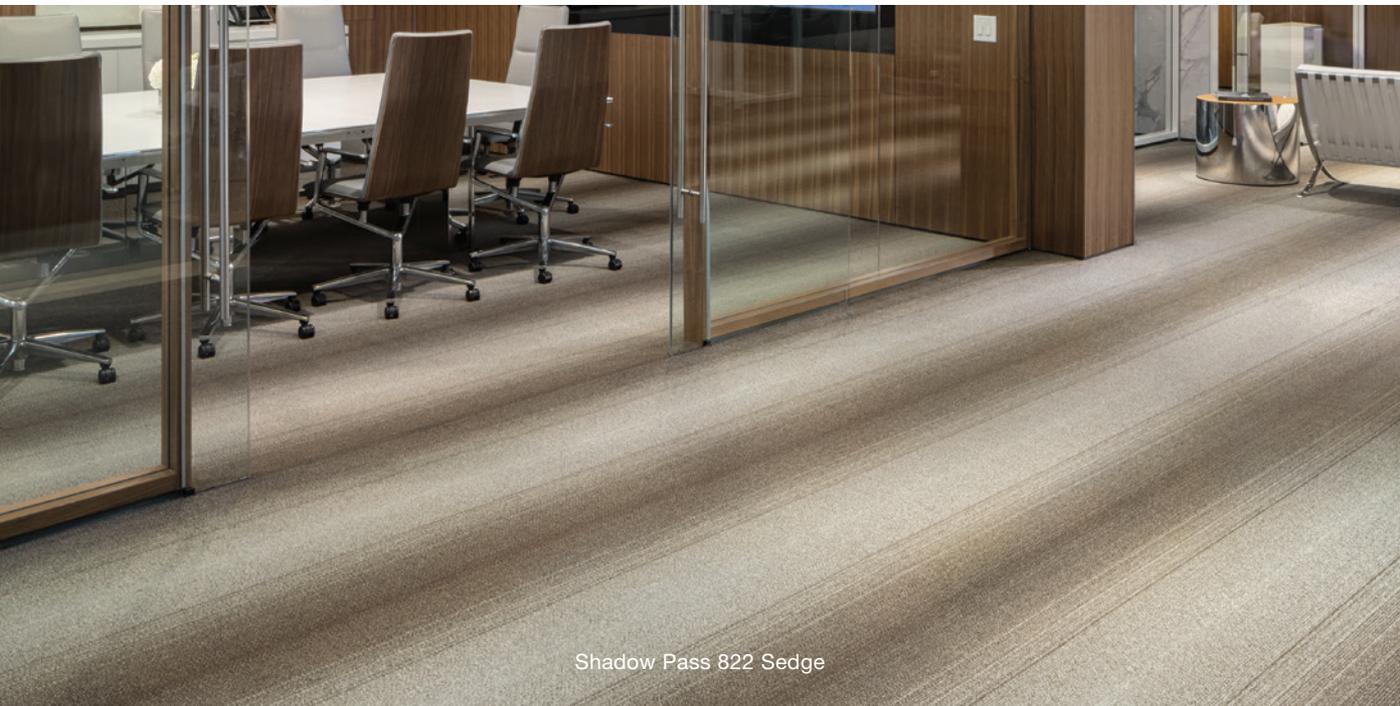

Shadow Pass 822 Sedge



## Molveno Woods



121 Touch of Sand



855 Toasty



872 Jute Brown



817 Iced Mocha



982 Caraibe



858 Warmstone



105 Argos



905 Tin Lizzie



983 Grounded



992 Ginger Root

## Molveno Stones



979 Grey Matters



889 Software



997 Night Owl



988 Cityscape



879 Perfect Greige

# Specifications

**Molveno Woods C0110**  
**Molveno Stones C0109**

## DESIGN

Overall Gauge	6mm
Wear Layer	20 mil
Finish	M-Force™
Colors Available	
Molveno Woods	10
Molveno Stones	5
Size	
Molveno Woods	
Nominal	7" x 59"
Actual	7.75" x 59.75" (196.85 mm x 1517.65 mm)
Molveno Stones	
Nominal	12" x 36"
Actual	11.75" x 35.75" (298.45 mm x 908.05 mm)
Packaging	
Molveno Woods	19.294 sq. ft. per carton / 6 pieces per carton / 38 lbs per carton
Molveno Stones	17.503 sq. ft. per carton / 6 pieces per carton / 34.50 lbs per carton
Installation	Floating ERT with Unipush Locking System

## PERFORMANCE

Construction	Commercial Grade Resilient Flooring with Rigid Polymeric Core
Squareness	ASTM F2421 - Passes - $\pm 0.10$ " max
Size and Tolerance	ISO24337 - Plank @48" - Passes - $\pm 0.08$ "
Thickness, product	ASTM F387 - Passes - as specified $\pm 0.005$ "
Thickness, wear layer	ASTM F410 - Passes - Commercial Min 0.02"
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Curling	ASTM F2199 - Passes - 0.08" Max
Static Load Limit	ASTM F970 - Passes, modified at 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes - $\Delta E < 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E < 8$
Critical Radiant Flux	ASTM E648 - Class 1 ( $> 0.45$ W/cm <sup>2</sup> )
Smoke Density	ASTM E662 Part A - Less than 450

## SUSTAINABILITY

Certification	FloorScore® Certified
Recycled Content	100% virgin vinyl

\*For detailed warranty, adhesive and installation information visit [mohawkgroup.com](http://mohawkgroup.com)

Mohawk Group

Mohawk Group  
160 South Industrial Blvd.  
Calhoun, GA. 30701  
1-800-554-6637  
mohawkgroup.com

C0110 PHOTO BROCHR LT