

ORIGINAL

MADE WITH 30%
NIKE GRIND RUBBER







HERO
RUBBER

MADE WITH



NIKE GRIND

MOE MEETS ORIGINAL

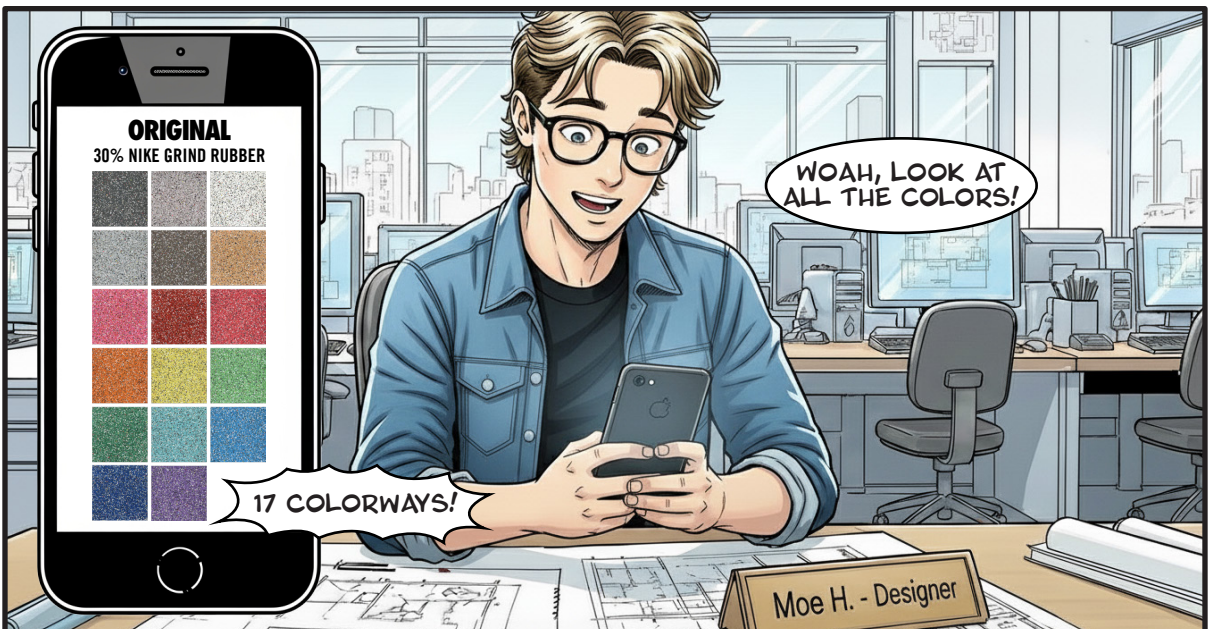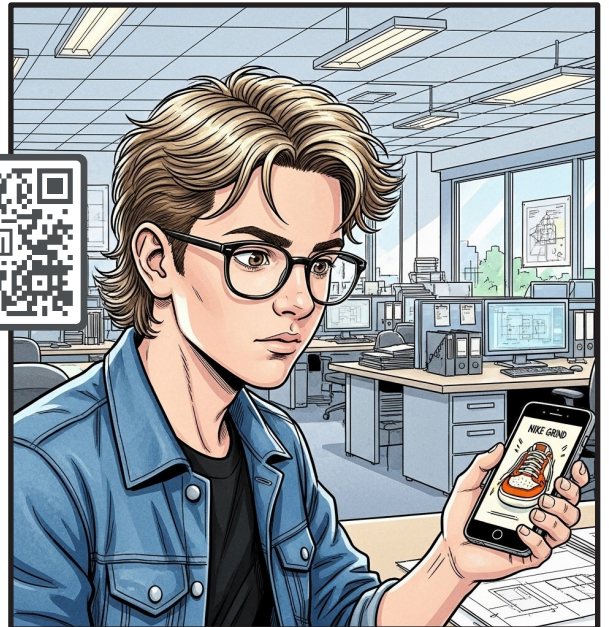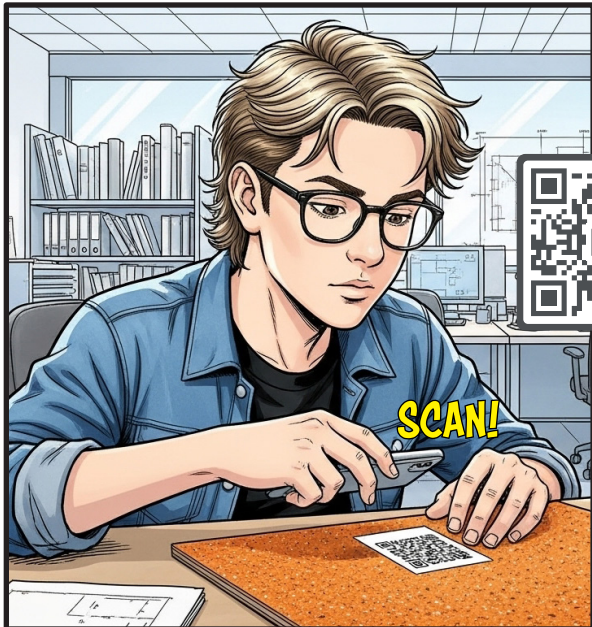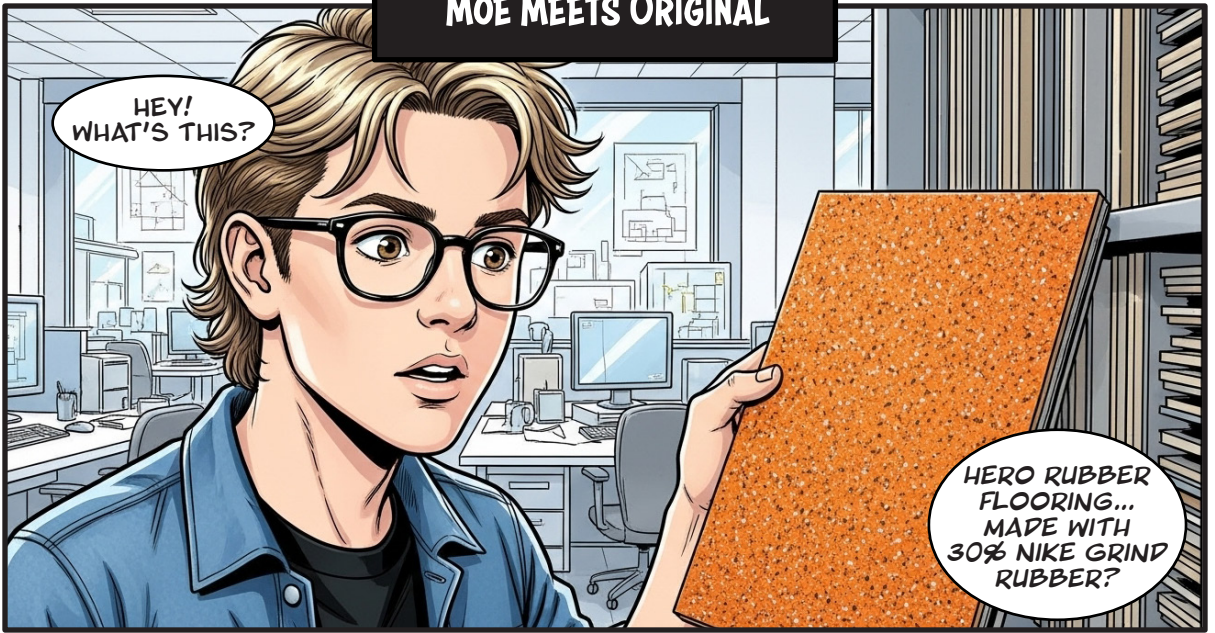


APPLICATION

RETAIL



LOBBIES

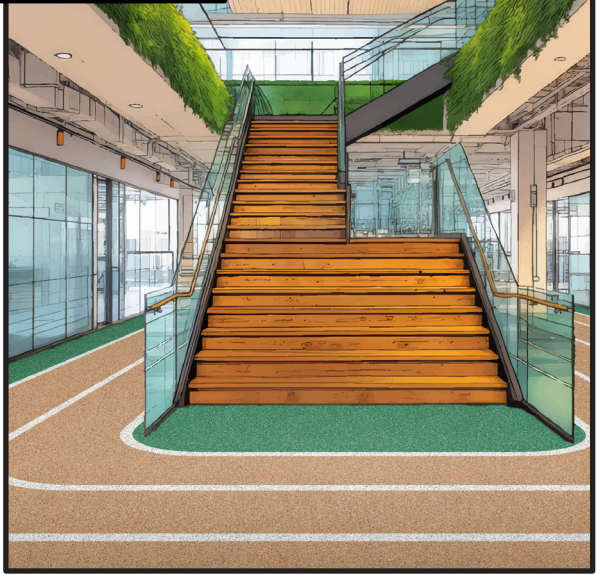

SCHOOLS




PHYSICAL THERAPY




WATERJET CUT CAPABILITIES!!

THIS IS PRETTY IMPRESSIVE! BUT WHERE CAN I USE THIS?



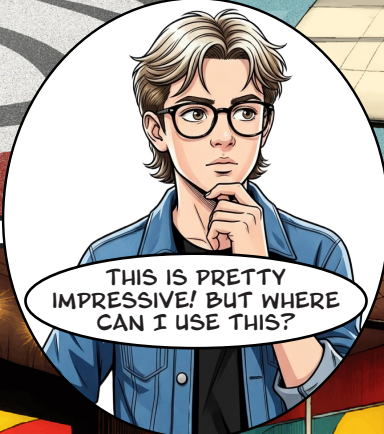


THEATERS

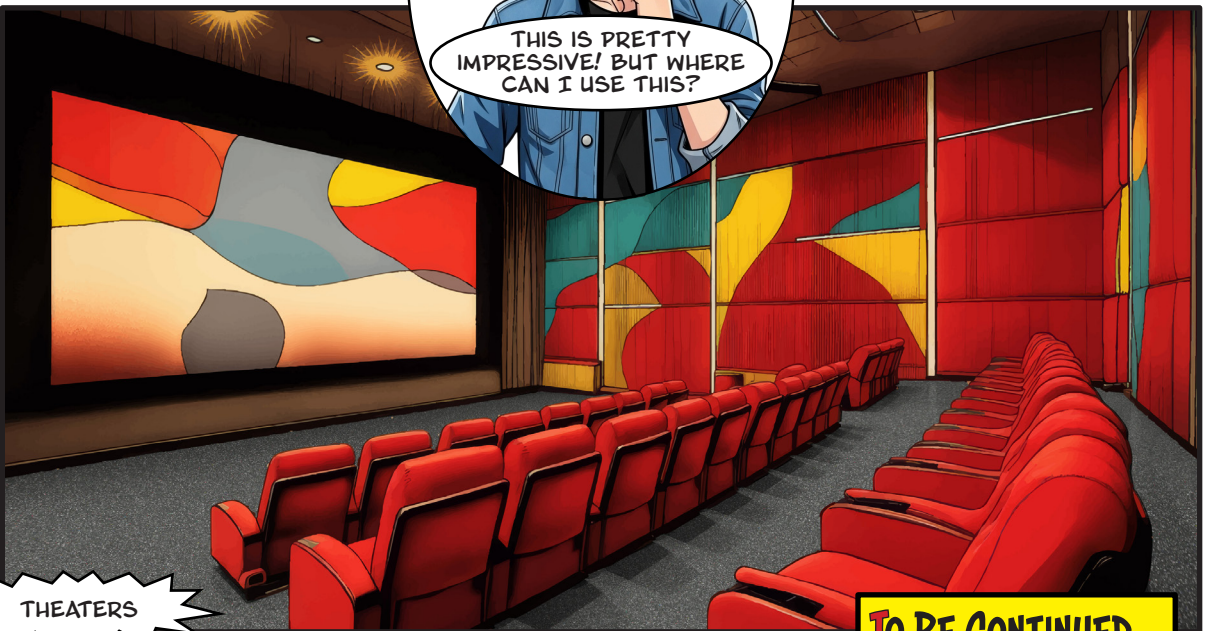

TO BE CONTINUED...

BETTER FOR PERFORMANCE

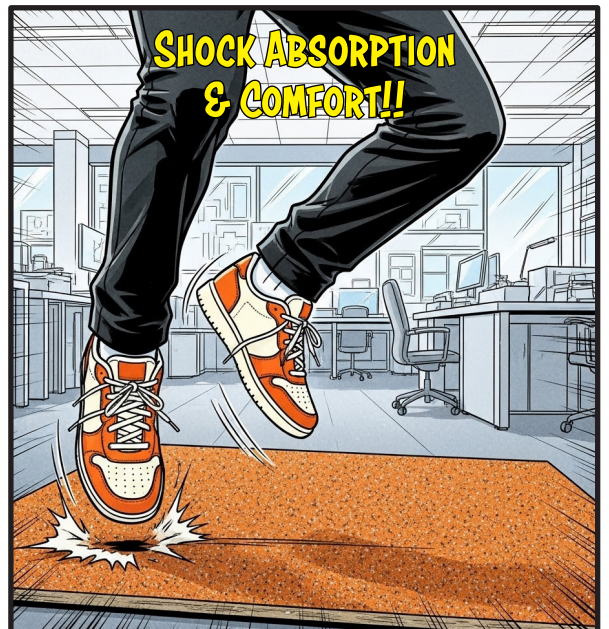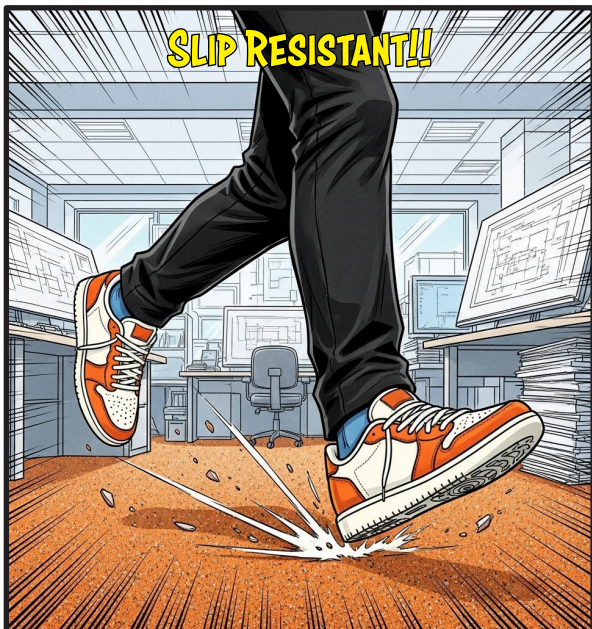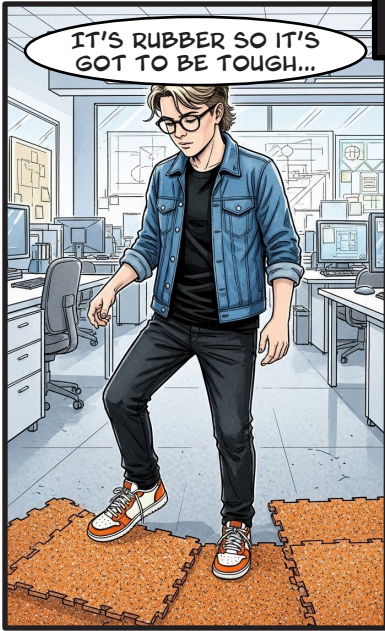

NIKE GRIND STORY



STARTED BY NIKE. BORN FROM PERFORMANCE. REBUILT FOR PURPOSE.

In 1992, Nike Grind started as a grassroots initiative to recycle old shoes and has grown to become a large-scale global solution to transform manufacturing scrap and end-of-life shoes, into versatile, high-performance materials. Along with use in our own shoes and Nike Strength weights, our rubber, foam, leather, plastics and textiles get new life with the help of licensees in everything from cutting-edge consumer products to playgrounds and sports surfaces.



OUTSOLE RUBBER SCRAP

**MORE THAN 150 MILLION POUNDS OF NIKE GRIND
RECYCLED INTO LICENSEES' PRODUCTS SINCE 1992.**

ZERO TIRES. ZERO TIRE ODOR.



INSTALLATION & MAINTENANCE

ROLLS

48"X25'

8MM THICKNESS

STRAIGHT EDGE

24"X24" & 48"X72"

**4MM
8MM
12MM
THICKNESSES**

INTERLOCKING

24"X24" & 48"X72"

**8MM
12MM
THICKNESSES**



LEARN MORE!

**EASE OF
MAINTENANCE!!**

**COORDINATING
WALLBASE OPTIONS
AVAILABLE!**

LEARN MORE!



ELEMENTAL EDGES

Specifications

Original Rubber 4mm (C3603)
Original Rubber 8mm (C3604)
Original Rubber 12mm (C3605)

DESIGN

Product Type Rubber
Overall Thickness 4mm, 8mm, 12mm

Product	Nominal Size (Actual Size)	Sizes Available	Colorways Available	Glue Down	Loose Lay
Original 4mm	24x24 (24"x24")	✓	17	✓	
	48x72 (48"x72")	✓	17	✓	
Original 8mm	24x24 (24"x24")	✓	17	✓	
	48x72 (48"x72")	✓	17	✓	
	24x24 Interlocking (23.37"x23.37")	✓	17	✓	✓
	48x72 Interlocking (46.82"x71.37")	✓	17	✓	✓
Original 12mm	48x25' Roll (48"x300")	✓	17	✓	
	24x24 (24"x24")	✓	17	✓	
	48x72 (48"x72")	✓	17	✓	
	24x24 Interlocking (23.37"x23.37")	✓	17	✓	✓
	48x72 Interlocking (46.82"x71.37")	✓	17	✓	✓

For detailed adhesive and installation information visit mohawkgroup.com.

PERFORMANCE


Construction Rubber
Breaking Load ASTM D412 65.91 lbs.
Elongation ASTM D412 75.83%
Tensile ASTM D412 271.8 lbs/sq. inch
Static Coefficient of Friction ASTM C1028 Dry 0.85; Wet 1.01
Hardness Shore A Durometer ASTM D2240 70
Density ASTM D3676 67.2 lbs/ft³
Static Load ASTM F970 0.029 inch residual compression

SUSTAINABILITY

Certification FloorScore® Certified, Declare Red List Free, EPD available
Recycled Content 30% Nike Grind

SERVICE

Warranties Limited 10 Year Commercial
For detailed warranty information visit mohawkgroup.com

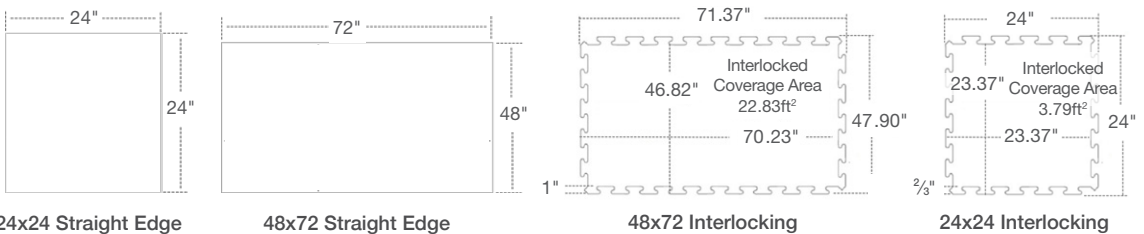

RECOVER
RECYCLING PROGRAM

Give your old flooring a second life with our award-winning ReCover Recycling Program. We will take away flooring made by any manufacturer, recycle it for you, and provide a certificate showing your positive impact on the planet.



THE LATEST IN AUGMENTED REALITY TECHNOLOGY!!

 **Mohawk GO**

USE AUGMENTED REALITY TO VISUALIZE PRODUCTS
IN YOUR ROOM

CAPTURE PHOTOS AND VIDEOS TO SHARE

ORDER SAMPLES DIRECTLY FROM THE APP

ESTIMATE SQUARE FOOTAGE

DOWNLOAD THE APP TO EXPLORE ALL THE FEATURES!



Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

MG823.8PAG.BROCHR.LT

