


vitality
HERO RUBBER
MADE WITH
NIKE GRIND
MADE WITH 20%
NIKE GRIND RUBBER


The Discovery of Vitality




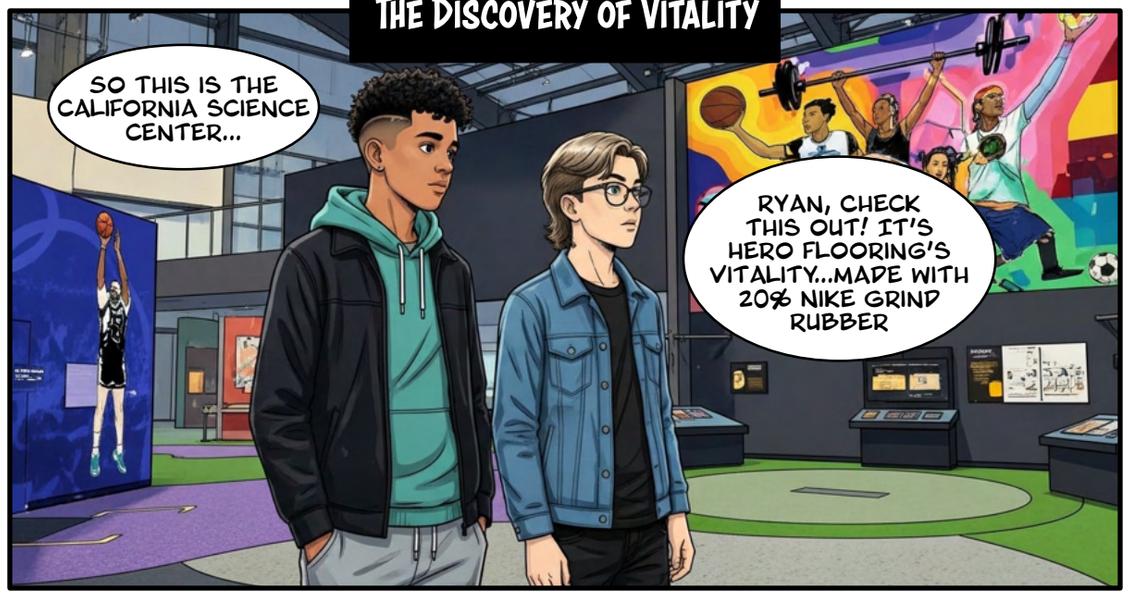


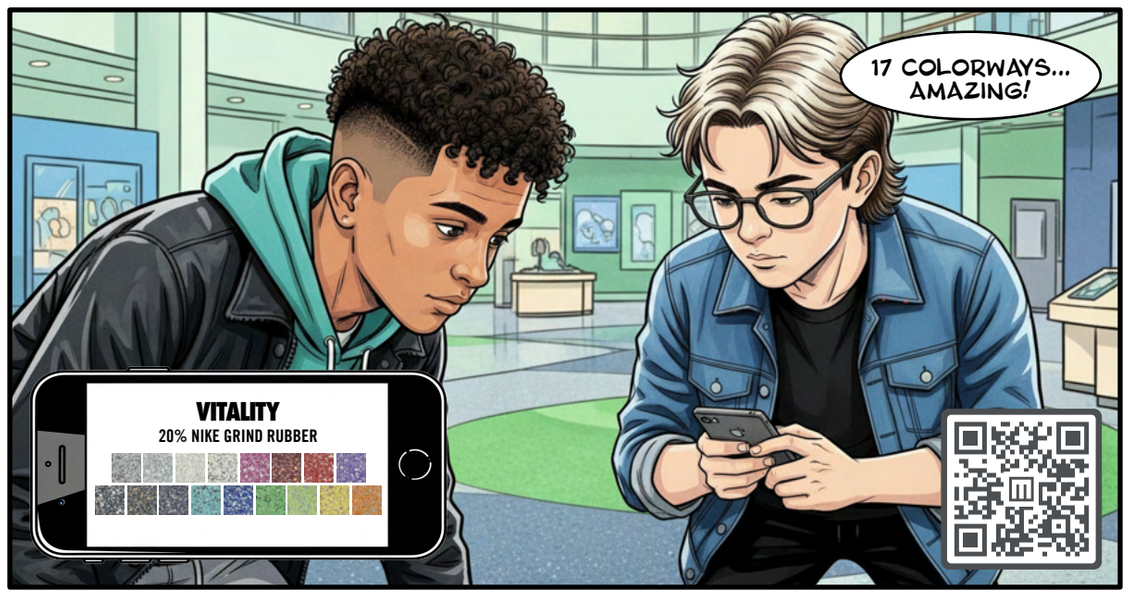

Application

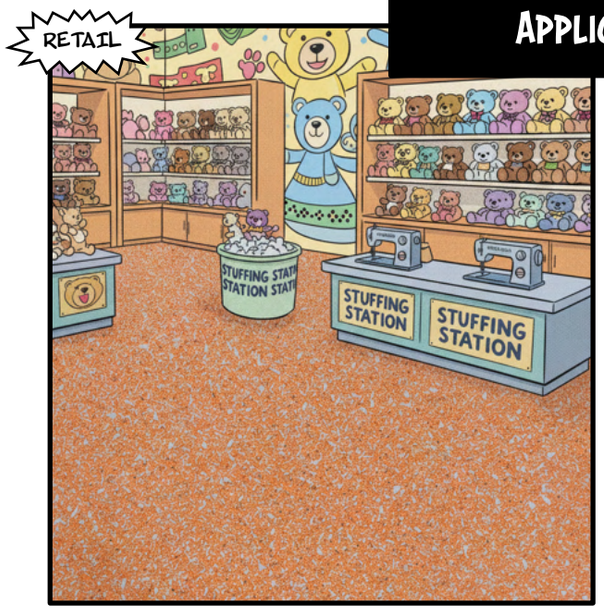

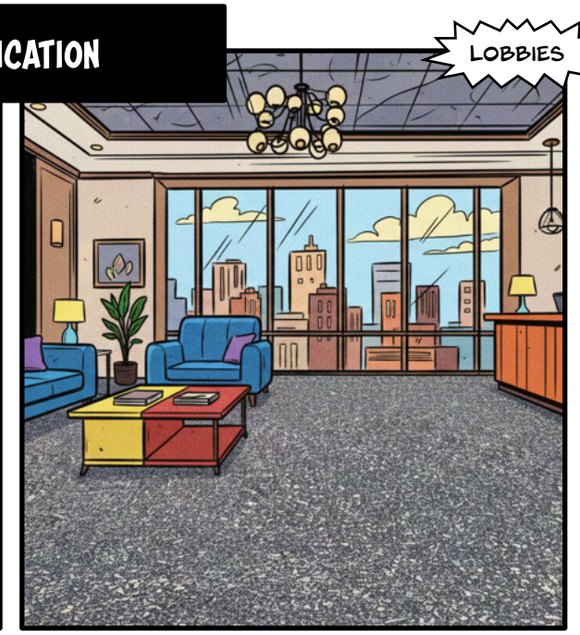

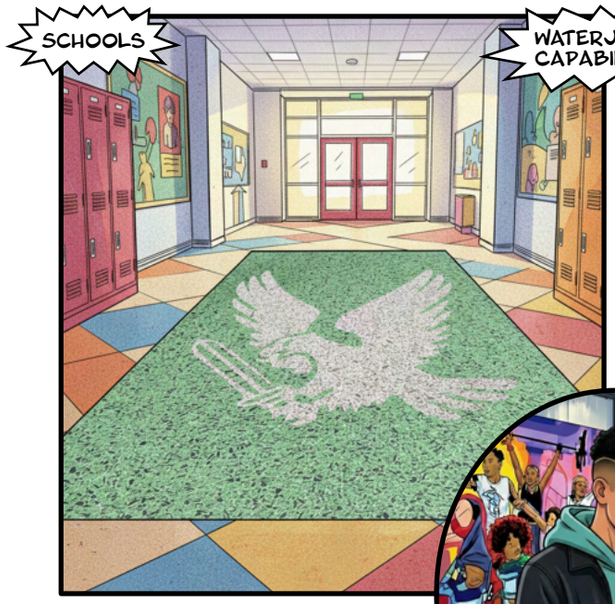





TO BE CONTINUED...


vitality


MADE WITH NIKE GRIND


MADE WITH 20% NIKE GRIND RUBBER


139 GOLDFINCH


249 FOX

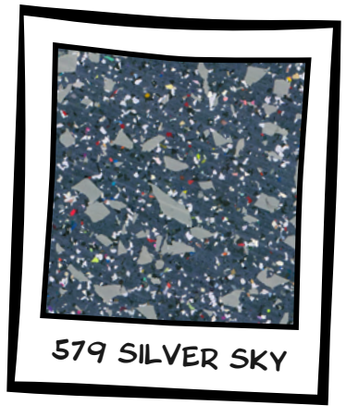
579 SILVER SKY

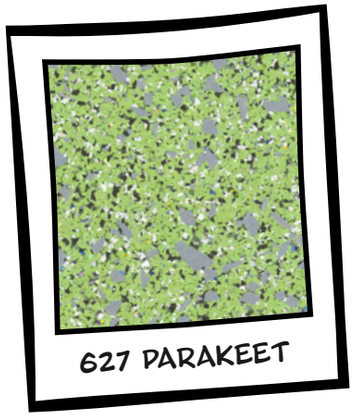
627 PARAKEET

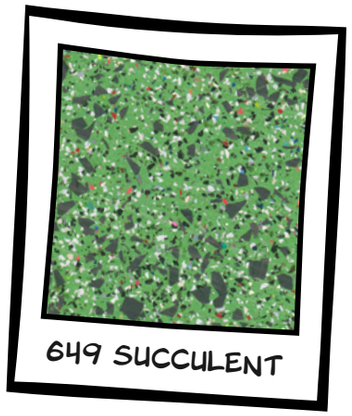
649 SUCCULENT



357 BERRY


363 PEPPERMINT


378 DESERT SUNSET



739 DOVE


759 DALMATIAN

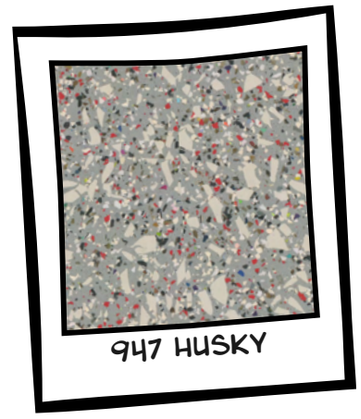
947 HUSKY



447 JELLYFISH


536 PEACOCK

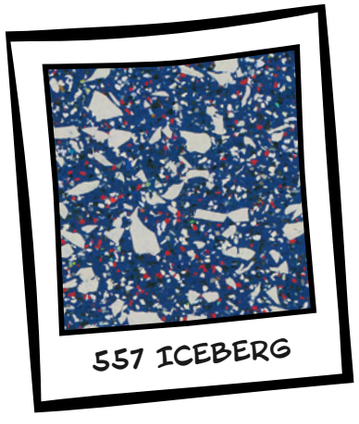
557 ICEBERG


958 TREASURE


959 KOALA

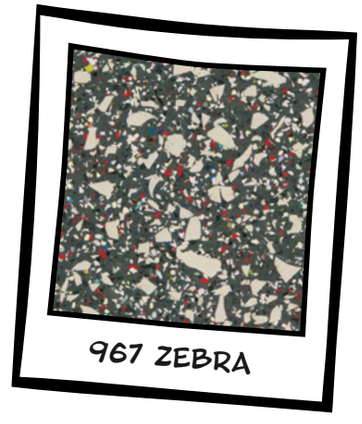
967 ZEBRA

Better For Performance



Nike Grind Story




STARTED BY NIKE. BORN FROM PERFORMANCE. REBUILT FOR PURPOSE.

In 1992, Nike Grind started as a grassroots initiative to recycle old shoes and has grown to become a large-scale global solution to transform manufacturing scrap and end-of-life shoes, into versatile, high-performance materials. Along with use in our own shoes and Nike Strength weights, our rubber, foam, leather, plastics and textiles get new life with the help of licensees in everything from cutting-edge consumer products to playgrounds and sports surfaces.

Outsole Rubber Scrap

MORE THAN 150 MILLION POUNDS OF NIKE GRIND RECYCLED INTO LICENSEES' PRODUCTS SINCE 1992.

ZERO TIRES. ZERO TIRE ODOR.

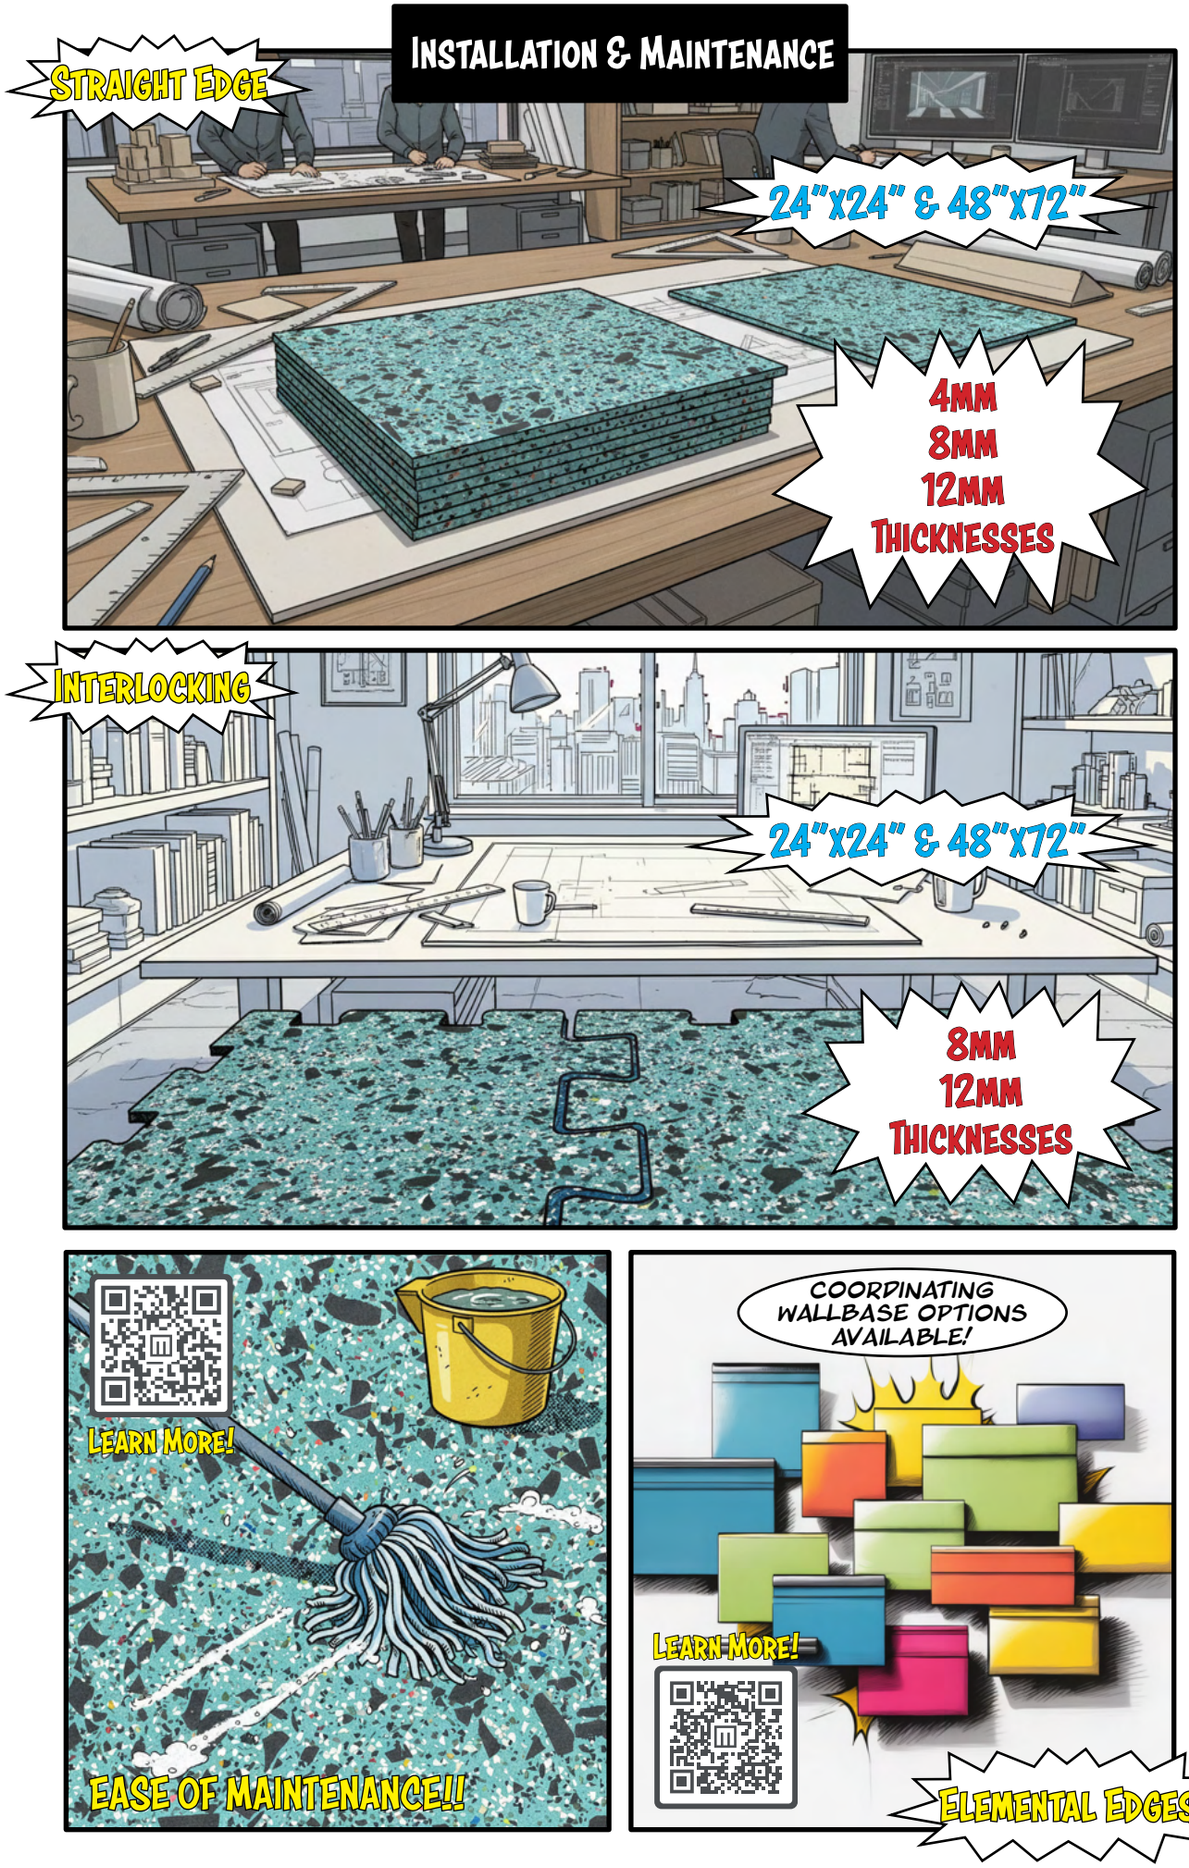

Specifications

Vitality Rubber 4mm (C3609)
Vitality Rubber 8mm (C3610)
Vitality Rubber 12mm (C3611)

DESIGN

Product Type	Rubber
Overall Thickness	4mm, 8mm, 12mm

Product	Nominal Size (Actual Size)	Sizes Available	Colorways Available	Glue Down	Loose Lay
Vitality 4mm	24x24 (24"x24")	✓	17	✓	
	48x72 (48"x72")	✓	17	✓	
Vitality 8mm	24x24 (24"x24")	✓	17	✓	
	48x72 (48"x72")	✓	17	✓	
	24x24 Interlocking (23.37"x23.37")	✓	17	✓	✓
	48x72 Interlocking (46.82"x71.37")	✓	17	✓	✓
Vitality 12mm	24x24 (24"x24")	✓	17	✓	
	48x72 (48"x72")	✓	17	✓	
	24x24 Interlocking (23.37"x23.37")	✓	17	✓	✓
	48x72 Interlocking (46.82"x71.37")	✓	17	✓	✓

For detailed adhesive and installation information visit mohawkgroup.com.

PERFORMANCE

Construction	Rubber
Breaking Load	ASTM D412 65.91 lbs.
Elongation	ASTM D412 75.83%
Tensile	ASTM D412 271.8 lbs/sq. inch
Static Coefficient of Friction	ASTM C1028 Dry 0.82; Wet 0.63
Hardness Shore A Durometer	ASTM D2240 70
Density	ASTM D3676 67.2 lbs/ft^3
Static Load	ASTM F970 0.029 inch residual compression


SUSTAINABILITY

Certification	FloorScore® Certified, Declare Red List Free, EPD available
Recycled Content	20% Nike Grind

SERVICE

Warranties	Limited 10 Year Commercial For detailed warranty information visit mohawkgroup.com

NFSI SLIP RESISTANT

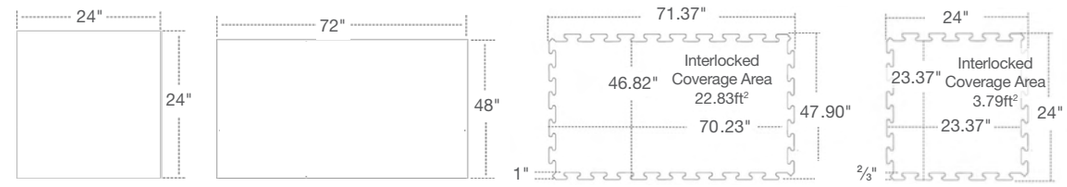

24x24 Straight Edge | 48x72 Straight Edge | 48x72 Interlocking | 24x24 Interlocking

RECOVER RECYCLING PROGRAM

Give your old flooring a second life with our award-winning ReCover Recycling Program. We will take away flooring made by any manufacturer, recycle it for you, and provide a certificate showing your positive impact on the planet.

floor score | Declare. Red List Free | UL CERTIFIED ENVIRONMENTAL PRODUCT DECLARATION



HERO FLOORING

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

MG824 8PAG BROCHR LT

Mohawk Group