



Woods 2.5 | 4.5

Featuring a new selection of some of our most popular wood visuals, Woods 2.5 | 4.5 LVT from the Living Local Collection brings natural warmth and fresh aesthetics to all types of spaces.

The styles provide a palette of 16 plank visuals that range from contemporary to classic grains in an array of colors. Adding versatility, this LVT is offered in two plank sizes as well as 2.5mm and 4.5mm platform thicknesses, enabling seamless transitions to our different types of carpet tile.

With a new level of diversity and adaptability, Woods 2.5 | 4.5 is the perfect solution for almost any project. Made in the USA with M-Force™ Ultra technology, these styles deliver outstanding quality, durability, and fresh inspiration for biophilic environments.




Learn more at mohawkgroup.com

Cover: Woods 2.5 | 4.5, 855 Bly, 822 Unicoi







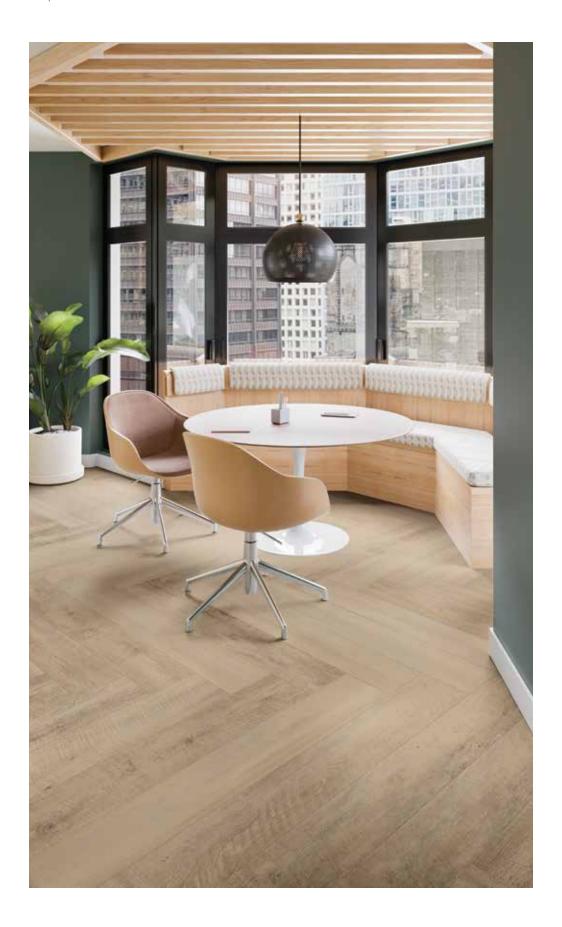

Colorways

Whether you're looking for a favorite or fresh option, Woods $2.5 \mid 4.5$ brings together a spectrum of aesthetics for your designs. Choose from a range of warm and cool tones with sleek graining, rich variation, or distressed effects.





095 Studio

220 Bridal Veil





812 Tan Tone

822 Unicoi






832 Tellico

838 Cumberland





839 Burney 855 Bly

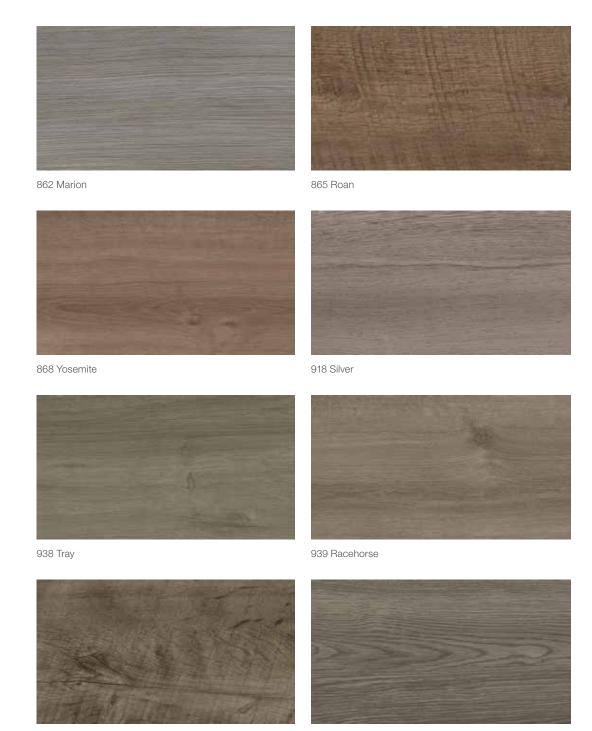

958 Two Tone 978 Woody



Ultra Performance and Worry Free Solutions for Any Project

Woods 2.5 | 4.5 is available in two thicknesses, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. Both products are designed with a 20 mil heavy commercial wear layer and our premium M-Force™ Ultra technology, which delivers a complete performance system for LVT.

M-Force[™] Ultra

Living Local features our M-Force™ Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.



Living Local is manufactured in our innovative closedloop facility in Georgia, with optimized material sourcing and reduced emissions in the distribution process.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.





2.5MM FLEX

Reducing installation time and costs, no transition strips are needed between the 2.5mm platform and EcoFlex™ Matrix backed carpet tile.

- May contribute toward LEED/WELL
- UL certified EPD

- No ortho-phthalates
- FloorScore® certified for low VOCs



4.5MM FLEX

Reducing installation time and costs, no transition strips are needed between the 4.5mm platform and EcoFlex™ ONE or EcoFlex™ AIR backed carpet tile.

- May contribute toward LEED/WELL
- UL certified EPD

- No ortho-phthalates
- FloorScore® certified for low VOCs



Running Line Rug Program

Unlock your creative freedom with our innovative Running Line Rug Program. Dive in and explore our carefully curated styles, mix and match colors, sizes, and edge treatments to create the perfect rug for your space.





Elemental Edges WALL BASE

Elemental Edges is a portfolio of architectural and cove wall base for your finishing needs. Featuring a range of colors that coordinate with our full product line, Elemental Edges also offers 14 stocked colors in cove wall base.



Specifications

Woods 2.5mm (C2121) Woods 4.5mm (C2120)

DESIGN

Product Type Luxury Vinyl Tile - Flexible

Overall Thickness 2.5mm 4.5mm

 Wear Layer
 20 mil (0.5mm)

 Finish
 M-Force™ Ultra

Colors 16

Size

 2.5mm
 7" x 48"

 4.5mm
 9.25" x 59"

 Emboss
 Overall

 Edge Profile
 Square Edge

Installation & Adhesive Glue Down

Packaging
2.5mm
13 pcs per carton / 36.22 sq ft per carton

4.5mm 7 pcs per carton / 26.52 sq ft per carton

visit mohawkgroup.com

For detailed adhesive and installation information

PERFORMANCE

ConstructionCommercial Flexible Luxury Vinyl TileClassificationASTM F1700 - Class III, Type B - EmbossedSquarenessASTM F2421 - Passes - ±0.10" maxSize and ToleranceASTM F2421 - Passes - ±0.016"/linear footThicknessASTM F386 - Passes, as specified ± .005"FlexibilityASTM F137 - Passes - 1" mandrel

Dimensional Stability

ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit

ASTM F970 - Passes, modified at 1000 psi

Residual Indentation ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%

Resistance to Chemicals ASTM F925 - Passes - No more than a slight change

Resistance to Light ASTM F1515 - Passes, $\Delta E \le 8$ Resistance to Heat ASTM F1514 - Passes, $\Delta E \le 8$ Critical Radiant Flux ASTM E648 - Class 1 (>0.45 W/cm2) Smoke Density ASTM E662 - Meets, 450 or less

SUSTAINABILITY

Certification FloorScore® Certified

SERVICE

Warranties Limited 20 Year M-Force™ Ultra Commercial

For detailed warranty information visit mohawkgroup.com





flooring from any manufacturer and will manage your entire recycling process





