

Designed for Well-Being

With Healthy Environments, we draw on our innate connection to the natural world in order to create spaces that comfort and inspire. PVC-Free, Medella Well flooring is free of plasticizers, orthophthalates, halogens, isocyanates, and Red List Chemicals of Concern, without sacrificing performance.

From ERs to classrooms, laboratories to break rooms to waiting areas, this homogeneous resilient sheet flooring delivers durability with M-Force™ Xtreme technology, achieves an NFSI High Traction Certification and R10 slip resistance rating for improved traction, and meets an ISO Class 3 Certification for cleanrooms.

With a 20-year warranty and 20-year underbed warranty*, Medella Well combines evidence-based design, technology, and innovation to bring high-quality performance into every space.

*When installed with approved adhesives. For detailed information visit, mohawkgroup.com.

Medella Applications

| ~ | Patient & Exam Rooms | ~ | Activity Rooms |
|----------|---------------------------|---|--------------------|
| ~ | ICU/OR | ~ | Physical Therapy |
| ~ | Clean Rooms | ~ | Food Services |
| ~ | Life Science & Laboratory | ~ | Science Classrooms |
| / | Corridors | V | Cafeterias |



Learn more at mohawkgroup.com

Cover:

Medella Well H6003 Lambs Wool, H6005 Meadow





Medella Well

Medella Well PVC-Free homogeneous resilient sheet with M-Force[™] Xtreme provides healthcare spaces with a holistic flooring solution. In addition to the advantages described below, the flooring installs with welded seams to create a wall-to-wall impermeable floor, delivering superior infection control as well as moisture resistance.

M-Force[™] Xtreme

PERFORMANCE FOR LIFE

Medella Well features
M-Force™ Xtreme
technology for exceptional
resistance to abrasions,
scratches, punctures, and
stains, providing long-term
durability with a limited 20year commercial warranty.



SLIP RESISTANCE CERTIFIED

Medella Well is NFSI
Certified High Traction Slip
Resistant in wet conditions
and achieves an R10 slip
resistance rating on the DIN
51130 Anti-Slip Properties
Ramp Test, ensuring reliable
traction.



Elemental Edges WALL BASE

Elemental Edges is a portfolio of architectural and cove wall base for your finishing needs. Featuring a range of colors that coordinate with our full product line, the collection also offers 14 stocked colors in cove wall base.



BETTER TOGETHER

As part of our Specify for the Cure program, Mohawk Group will donate on your behalf to Susan G. Komen for qualifying specifications of this collection.



SUSTAINABLE

All Healthy Environments resilient sheet products are FloorScore certified and have an ASTM certified EPD for better indoor air quality. These products can be recycled through the Mohawk Group Recover program.



BEYOND CARBON NEUTRAL

Healthy Environments is Beyond Carbon Neutral, for a Net-Positive impact.

Declare.

RED LIST FREE

Medella Well PVC-Free sheet is free of plasticizers, ortho-phthalates, halogens, isocyanates and Red List Chemicals of Concern.



Ш

Colorways

The broad palette of Medella Well helps create nurturing environments that can also include pops of color, ideal for wayfinding and pediatric spaces.




Weld Rods colorways

Optional heat welding or cold welding techniques can be used to create seamless, sanitary flooring that's easy to maintain. Coordinating PVC-Free weld rods are available for all Medella Well colorways.

PVC-Free Solid

SKU: MWSWR | 164 Linear Feet

| 16001 Cloudy Skies | H6010 Sea Lion |
|--------------------|--------------------|
| 16002 White Sand | H6011 Summer Sun |
| 16003 Lamb's Wool | H6012 Tiger Lily |
| 16004 Mirror Lake | H6013 Seaweed |
| 16005 Meadow | H6014 Island Shore |
| 16006 Wheat Field | H6015 Crosswind |
| 16007 Current | H6016 Sea Wall |
| 16008 Dolphin | H6017 Calm Waters |
| 16009 Rainstorm | H6018 Naval |

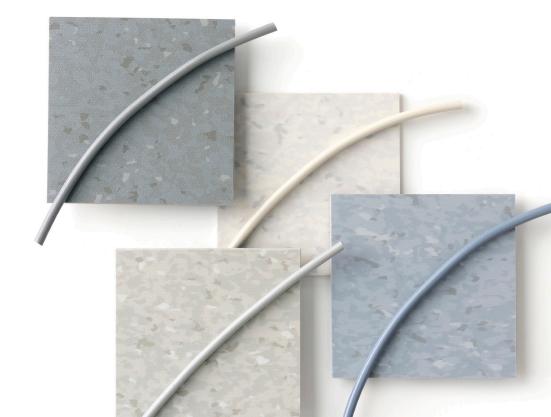



M-Force[™] Xtreme FOR SHEET

Discover a hard surface flooring solution that delivers superior durability and stain resistance, ensuring ease of care for the life of the floor. Mohawk Group's Resilient Sheet Flooring with M-Force™ Xtreme provides elegant design and performance solutions for healthcare spaces.

PERFORMANCE


- Provides exceptional resistance to abrasions, scratches, and punctures for lasting beauty.
- Homogeneous resilient construction provides enhanced protection from cuts or gouges.
- Proven to meet stringent particulate and cleanliness requirements for controlled environments: Certified for ISO 14644 cleanroom standards.

CLEANABILITY

- Remains 100% stain-free against common staining agents, as tested per ANSI/NALFA LF-01 Section 3.4 - Cleanability and Stain Resistance.
- Provides the highest ease of cleaning and resistance to soiling, as tested per the BS EN 14565 Hexapod Soiling Test.

SAFETY

- NFSI Certified High Traction in wet conditions.
- Achieves an R10 slip resistance rating and ensures reliable traction, as tested per the DIN 51130
 Anti-Slip Properties Ramp Test.

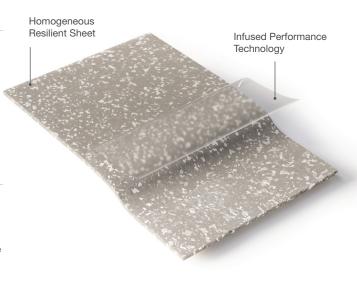

WATER RESISTANCE

With welded seams and a water-repellent finish, Healthy Environments resilient styles create impermeable flooring systems.

ISO Class 3 Cleanroom

With M-Force™ Xtreme, Medella helps create safer, healthier spaces that meet the highest cleanliness requirements.

- Meets ISO 14644-1 cleanroom standards at ISO Class 3.
- Certification ensures that Medella flooring supports strict standards for air cleanliness.
- Reduces the generation and buildup of airborne particulates in the environment.
- Ideal for hospitals, labs, and other areas where maintaining a clean and controlled atmosphere is critical.

Backed by 20-Year Warranties

- Limited 20-Year Commercial Warranty
- Limited 20-Year Commercial Under Bed Warranty*

Mohawk Group

Slip Resistance Certified



Tested to Ensure Reliable Traction

Medella flooring achieves an R10 slip resistance rating in the DIN 51130 Anti-Slip Properties Ramp Test, ensuring reliable traction.

NFSI Certified High Traction in Wet Conditions

Medella is the only resilient sheet flooring on the market with high traction certification from the National Floor Safety Institute (NFSI).

Advantages of NFSI High Traction Testing

- NFSI measures slip resistance on wet flooring, where slip-and-fall injuries typically occur.
- NFSI measures slip resistance in static and dynamic situations, akin to standing and walking.
- NFSI tests a flooring sample and a field installation.
- ASTM D2407 only tests on dry flooring.
- ASTM D2407 only tests using the static method, offering no insight on slip resistance when walking.
- ASTM D2407 only tests a flooring sample in a lab.

| TEST METHOD | NFSI B101.1* & B101.3+ | ASTM D2047 |
|---|------------------------|------------|
| Dry floor | | V |
| Wet floor | ✓ | |
| Static* (stationary) | ✓ | V |
| Dynamic+ (in motion) | ✓ | |
| Sample tested in lab | ✓ | V |
| Field installation for at least 30 days | ✓ | |



^{*}When installed with approved adhesives. For detailed adhesive and installation information, visit mohawkgroup.com.



Resilient Sheet Solutions

Weld Rods

Mohawk Group's PVC-Free Weld Rods are recommended for Medella Well. The weld rods are offered in solid coordinating colorways and used for seaming, wayfinding or accenting.



Scan to see our suggested weld rod color coordinates for Medella styles.

HEAT WELD / COLD WELD

Optional heat welding or cold welding techniques can be used to create seamless, sanitary flooring that's easy to maintain. For weld rods, place the order using "MWSWR" style number, followed by the Medella Well color number. Place order using "INFZC" for the Infuze Seam Sealer.





MWSWR Heat Weld

/eld INFZC Cold Weld

Installation and Applications

Medella Well includes solutions for a more efficient and effective installation, as well as a guide to the variety of project applications and segments where this product excels.

IN-HOUSE CUT PROGRAM

- Medella Well can be cut to the roll size you need with our in-house cut program
- No order minimum required



PROJECT SOLUTIONS

- MS160 spray adhesive can be used for projects where immediate occupancy is needed
- Medella Well can be flash coved for enhanced sanitary protection.



Scan to see our recommended application guide.

Mohawk Group

Specifications

Medella Well (C2063)

DESIGN

Product Type PVC-Free Homogeneous Sheet

 Width
 6' 7" (2.0 m)

 Overall Thickness
 .080" (2.0 mm)

 Finish
 M-Force™ Xtreme

Colors Available 18 Colors

Seaming Method Mohawk Solid Heat Weld Rod or Cold Weld

Packaging

Roll Length - Up to 98.4' (30 m)

Approx. 4.88 lbs/SY (2.65 kg/sq.m)

PERFORMANCE

Construction Commercial Grade PVC-Free Homogeneous Resilient Sheet

Classification ASTM F1303 - Meets or Exceeds
Flexibility ASTM F137 - Method A, Meets 38 mm
Thickness ASTM F386 - Passes, as specified ± .005"

Static Load Limit ASTM F970 - Passes, ≤ 0.1 mm, modified to 2,000 psi

 $\begin{tabular}{ll} Residual Indentation & ASTM F1914 - Passes, $\le 0.15 m$ \\ Dimensional Stability & ASTM 2199 - Meets, $\le 0.4\%$ \\ Resistance to Chemicals & ASTM F925 - Passes \\ Resistance to Light & ASTM F1515 - Passes, $\triangle E < 8$ \\ Resistance to Heat & ASTM F1514 - Passes, $\triangle E \le 8$ \\ Critical Radiant Flux & ASTM E648 - Meets, Class 1$ \\ Smoke Density & ASTM E662 - Meets, 450 or less \\ \end{tabular}$

Slip Resistance NFSI B101.1 - NFSI Certified High Traction NFSI B101.3 - NFSI Certified High Traction

DIN 51130 Anti-Slip Properties Ramp Test - R10 Rating

ISO 14644-1 - ISO Class 3 Certified

Cleanroom ISO 14644-1 - ISO Class 3 Certi

SUSTAINABILITY

Certification Red List Free, Environmental Product Declaration,

Health Product Declaration Indoor Air Quality FloorScore® Certified

Carbon Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties Limited 20-Year Commercial

Limited 20-Year Under Bed Warranty*

*When installed with approved adhesives. For detailed adhesive and installation information, visit mohawkgroup.com

Mohawk Group warrants its adhesives for the life of the original installation only when a Mohawk Group style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. The use of Mohawk Group approved adhesives is required to ensure optimum results and are the only adhesives warranted by Mohawk Group. Please contact your local Sales Representative for installation guidelines.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. **For current and complete specifications please visit mohawkgroup.com**



REC**₹**VER

Give your old flooring a second life with our award-winning ReCover Recycling Program. We will take away flooring made by any manufacturer, recycle it for you, and provide a certificate showing your positive impact on the planet.





