


HOT AND HEAVY II

Neutral Timber 5.0 C2139

9.84 in x 59.06 in LVT

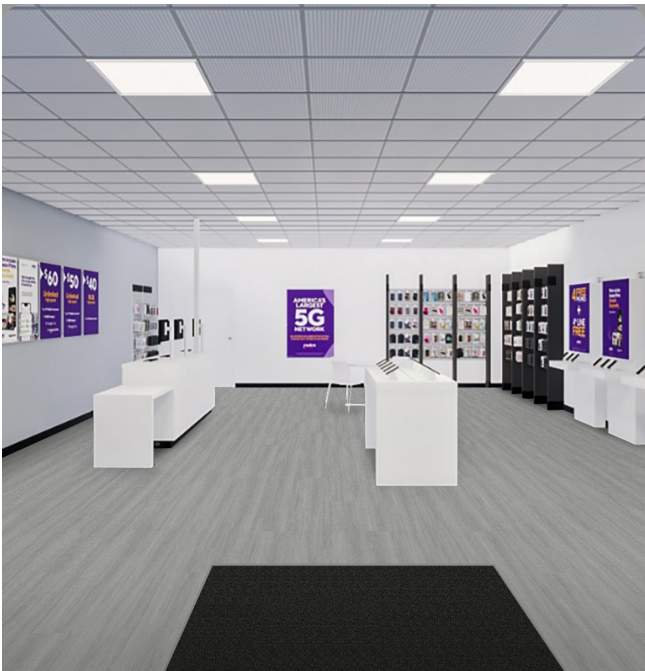

Collection	Hot and Heavy II
Style	Neutral Timber 5.0 (C2139)
Product Type	LVT
Size	9.84 in x 59.06 in
Construction	Commercial LVT
Total Thickness	5.0 mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra
Surface Profile	Embossed
Edge Profile	Squared
Installation	Loose Lay
Recommended Adhesive	M95.0, MS160, M700 Plus, FlexPress, or Total Bond Adhesive

Colorways



Smoked Oak
Color: 949

Testing

Classification	(ASTM F1700) Type B - Embossed
Squareness	(ASTM F 2421) ± 0.10 " max
Size and Tolerance	(ASTM F2421) Passes
Thickness	(ASTM F386) ± 0.005 "
Flexibility	(ASTM F137) Passes
Dimensional Stability	(ASTM F2199) Passes
Static Load Limit	(ASTM F970) 1000 psi
Lightfastness	(ASTM F1515) Passes
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	(ASTM F925) Passes
Resistance to Light	(ASTM F1515) Passes
Resistance to Heat	(ASTM F1514) Passes
Radiant Flux	(ASTM E648) Class 1
Smoke Density	(ASTM E662) <450
Wear Layer Thickness	20 mil (0.5mm)

Sustainability

Embodied Carbon	6.43 kg CO ₂ e/m ²
Carbon Handprint	-6.75 kg CO ₂ e/m ²
Beyond Carbon Neutral	-0.58 kg CO ₂ e/m ²
Pre-Consumer Recycled Content	25%
EPD	Hot and Heavy II 5.0 mm EPD
HPD	Hot & Heavy II 5.0 mm HPD

Packaging

Square Feet Per Carton	24.22
Pieces Per Carton	6
Cartons Per Pallet	68

Warranties

Limited 20 Year M-Force Ultra Commercial Warranty