



# Weldlok®

## COST EFFECTIVE STANDARD PERFORMANCE

**Weldlok®** is the Mohawk Group's standard broadloom backing system specifically designed for commercial applications. The Weldlok® backing is laminated to our products utilizing a commercial thermoset adhesive. This adhesive is designed to encapsulate and penetrate the carpet back stitch in the main application coat, while the second application coat secures the secondary backing to the carpet substrate for a cost effective performance standard.

### PERFORMANCE

- Standard backing specifically designed for commercial applications
- Excellent pattern match capabilities
- For use with direct glue or stretch in installations
- 10-Year Limited Warranty
- Excellent choice for most commercial environments

### SUSTAINABILITY

- Recyclable
- Minimum of 37% pre-consumer recycled content
- May contribute to or comply with LEED credits MR 4.0, MR 5.0, IEQ 4.3 and innovation credit for NSF 140
- Certified Gold in accordance with NSF / ANSI 140
- Certified low VOC's under CRI Green Label Plus Program
- Compliant with LEED EQ 4.1 low VOC emitting when installed with Mohawk Group recommended adhesive and seam sealer
- Declare label and HPD information available

### BUDGET

- Standard performance backing system for the most budget conscious projects


### SERVICE

- Products available through Quickship offering (up to 2,000 square yards within 10 business days)

Primary Backing

Thermoset Adhesive

Reinforced Woven Synthetic

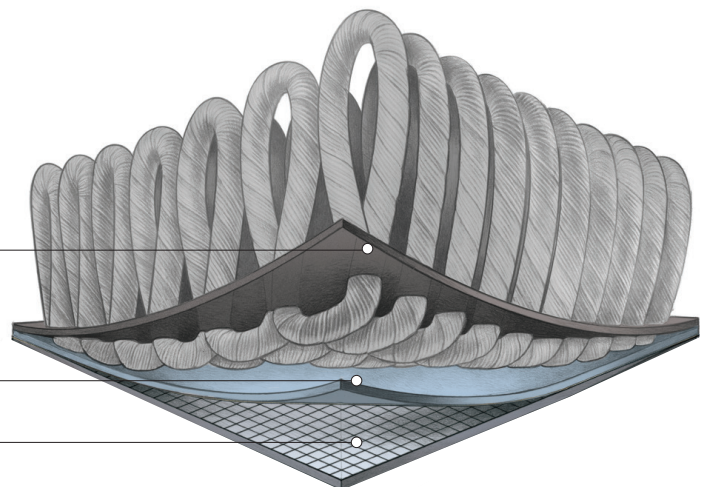



# Weldlok®

## COST EFFECTIVE STANDARD PERFORMANCE

| Backing  | Required Adhesive                        | Adhesive Application Method   | Moisture & pH               | Spread Rate     | Seam Sealer                                       |
|----------|--|---|-----------------------------|-----------------|---|
| Weldlok® | Mohawk NuBroadlok® Premium Multi-Purpose | Direct Glue: 1/8" x 1/8" x 1/8"<br>U-Notch Trowel or<br>1/8" x 1/8" x 1/16"<br>V-Notch Trowel | 5 lbs,<br>80% RH,<br>5-9 pH | 8-10 SY/<br>Gal | Mohawk<br>NuBroadlok®<br>Latex Seam<br>Sealer     |
| Weldlok® | NuBroadlok® VRT                          | Direct Glue: 1/8" x 1/8" x 1/8"<br>U-Notch Trowel or<br>1/8" x 1/8" x 1/16"<br>V-Notch Trowel | 5 lbs,<br>99% RH,<br>12 pH  | 8-10 SY/<br>Gal | Mohawk<br>NuBroadlok®<br>Moisture<br>Proof Sealer |

NOTE: Mohawk OptiSeal™ required for installations with subfloor moisture exceeding 5 lbs and/or 80% RH. Maximum allowable moisture with OptiSeal™ is 90% RH.

### LIFETIME LIMITED WARRANTY\*

- 10-YEAR LIFETIME LIMITED WEAR  
Maintains at least 90% of surface weight
- LIFETIME LIMITED STATIC PROTECTION  
Will not give static discharge above 3.5KV

\*See Mohawk Group warranty documents for further details at [www.mohawkgroup.com](http://www.mohawkgroup.com)

LEED and the related logo is a trademark owned by the U.S. Green Building Council and is used with permission