



# Weldlok®

COST EFFECTIVE STANDARD PERFORMANCE

**Weldlok®** is the Mohawk Group's standard broadloom backing system specifically designed for commercial applications. The Weldlok® backing is laminated to our products utilizing a commercial thermoset adhesive. This adhesive is designed to encapsulate and penetrate the carpet back stitch in the main application coat, while the second application coat secures the secondary backing to the carpet substrate for a cost effective performance standard.

## PERFORMANCE

- Standard backing specifically designed for commercial applications
- Excellent pattern match capabilities
- For use with direct glue or stretch in installations
- 10-Year Limited Warranty
- Excellent choice for most commercial environments

## BUDGET


- Standard performance backing system for the most budget conscious projects

## SUSTAINABILITY

- Recyclable
- May contribute to or comply with LEED credits MR 4.0, MR 5.0, IEQ 4.3 and innovation credit for NSF 140
- Certified Gold in accordance with NSF / ANSI 140
- Certified low VOC's under CRI Green Label Plus Program
- Compliant with LEED EQ 4.1 low VOC emitting when installed with Mohawk Group recommended adhesive and seam sealer
- Declare label and HPD information available

## SERVICE

- Products available through Quickship offering (up to 2,000 square yards within 10 business days)

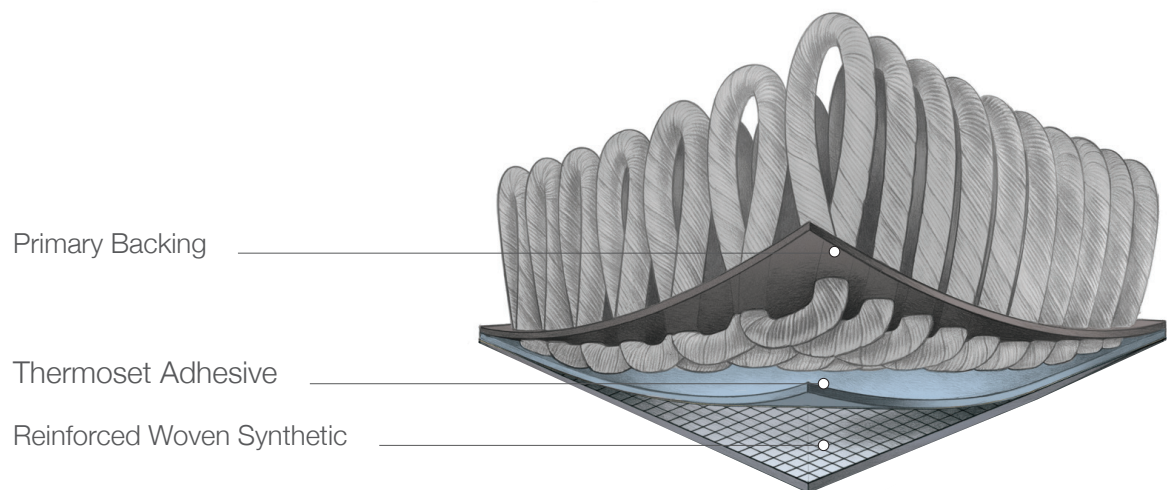



# Weldlok®

## COST EFFECTIVE STANDARD PERFORMANCE

Backing	Required Adhesive	Adhesive Application Method	Moisture & pH	Spread Rate	Seam Sealer
Weldlok®	Mohawk NuBroadlok® Premium Multi-Purpose	Direct Glue: 1/8" x 1/8" x 1/8" U-Notch Trowel or 1/8" x 1/8" x 1/16" V-Notch Trowel	5 lbs, 80% RH, 5-9 pH	8-10 SY/ Gal	Mohawk NuBroadlok® Latex Seam Sealer
Weldlok®	NuBroadlok® VRT	Direct Glue: 1/8" x 1/8" x 1/8" U-Notch Trowel or 1/8" x 1/8" x 1/16" V-Notch Trowel	5 lbs, 99% RH, 12 pH	8-10 SY/ Gal	Mohawk NuBroadlok® Moisture Proof Sealer

NOTE: Mohawk OptiSeal™ required for installations with subfloor moisture exceeding 5 lbs and/or 80% RH. Maximum allowable moisture with OptiSeal™ is 90% RH.

### LIFETIME LIMITED WARRANTY\*

- 10-YEAR LIFETIME LIMITED WEAR  
Maintains at least 90% of surface weight
- LIFETIME LIMITED STATIC PROTECTION  
Will not give static discharge above 3.5KV

\*See Mohawk Group warranty documents for further details at [www.mohawkgroup.com](http://www.mohawkgroup.com)

LEED and the related logo is a trademark owned by the U.S. Green Building Council and is used with permission