

Emergent Collection





358 Split Rail
Cover: 949 Iron Gate and 918 Abbey Stone








141 Flax Straw

Emergent Collection

Proudly manufactured in America, Emergent LVT celebrates the vibrant, versatile spirit of our local communities. Appealing natural wood visuals are designed to fit any interior, providing a core collection of LVT styles to use for a variety of projects.

Features

- M-Force™ Enhanced Urethane finish and 20 mil wear layer protect against commercial traffic
- Wood textures emulate natural materials
- No polish maintenance reduces occupied costs
- Diverse color line spans from traditional to contemporary influences
- Designed to coordinate with a variety of Aladdin Commercial carpet collections
- Limited 10 Year Commercial Warranty
- Limited 25 Year Residential Warranty
- Made in America

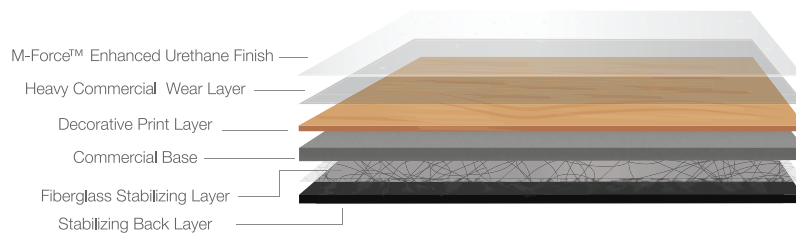

Emergent Color Options




141 Flax Straw




142 Basketry



342 Burnished

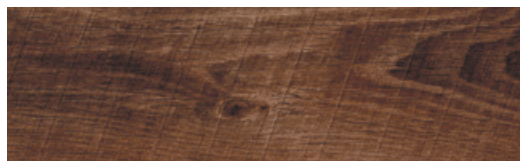

358 Split Rail

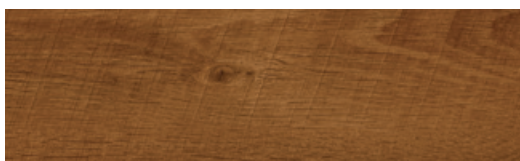

363 Stone Brown



812 Antiquity




829 Mocha Accent



918 Abbey Stone



938 Canyon

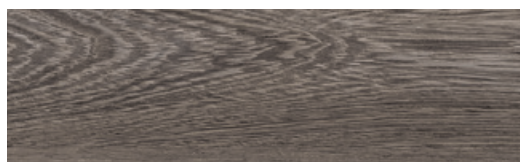

949 Iron Gate



958 Garden Wall

Specifications

<div style="border: 1px solid black; width: 15px; height: 15px; margin: 0 auto;"></div> LVT	Brand.....	Aladdin Commercial
	Style Name / Number	Emergent / AH006
	Product Type	Commercial Grade Luxury Vinyl Tile (Glue Down)
	Overall Gauge.....	2.5mm
	Wear Layer.....	20 mil (0.5mm)
	Finish.....	M-Force™ Enhanced Urethane
	Colors Available.....	11
	Size.....	6"x48" (152.4mm x 1,219.2mm)
	Packaging SF/CTN.....	36 sf/ctn (3.34m ² /ctn); 60 ctns/pallet; 29.7 lbs./ctn
	Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
	Squareness.....	ASTM F2055 - Passes - 0.010 in. max
	Size and Tolerance	ASTM F2055 - Passes - at ±0.016 in. per linear foot
	Thickness.....	ASTM F386 - Passes - As specified ±0.005 in.
	Flexibility	ASTM F137 - Passes - ≤ 1.0 in. / No crack or break
	Dimensional Stability	ASTM F2199 - Passes - ≤ 0.020 in. per linear foot
	Static Load Limit	ASTM F970 (modified) - 1500 psi
	Residual Indentation.....	ASTM F1914 - Passes - Average less than 8%
	Slip Resistance.....	ASTM D2047 - Passes - > 0.5
	Resistance to Chemicals	ASTM F925 - Passes - No Change
	Resistance to Light.....	ASTM F1515 - Passes - $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E \leq 8$	
Critical Radiant Flux.....	ASTM E648 - Passes - ≥ .45 watts/cm ² , Class 1	
Smoke Density.....	ASTM E662 Part A - Passes - < 450	
Installation	Glue Down	
Recommended Adhesive.....	M95.0 Resilient Flooring Adhesive, M99 Resilient Flooring Adhesive, or M700 Adhesive	
Optional Underlayment	Mohawk AccuSound	
Certification	FloorScore® Certified	
Country of Origin	USA	
Warranty	Limited 10 Year Commercial Warranty Limited 25 Year Residential Warranty	


Aladdin[™]
 COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.AladdinCommercial.com | 800.233.4490

1039_Aug/2021

