

Reconnected






849 Tawny, Details Matter 948 Fission
Cover: 962 Magma

Reconnected Collection

The new Reconnected LVT style by Aladdin Commercial freshens up your floors with its collection of 10 unique wood visuals containing natural pops of color variation. Available in 6" x 48" planks, Reconnected is the perfect solution to create an inviting commercial space for your business.

Features:

- 2mm overall gauge
- 12 mil commercial wear layer
- Enhanced Urethane Finish
- 6" x 48" plank size
- FloorScore® Certified
- Limited 10 Year Commercial Warranty
- Limited 25 Year Residential Warranty

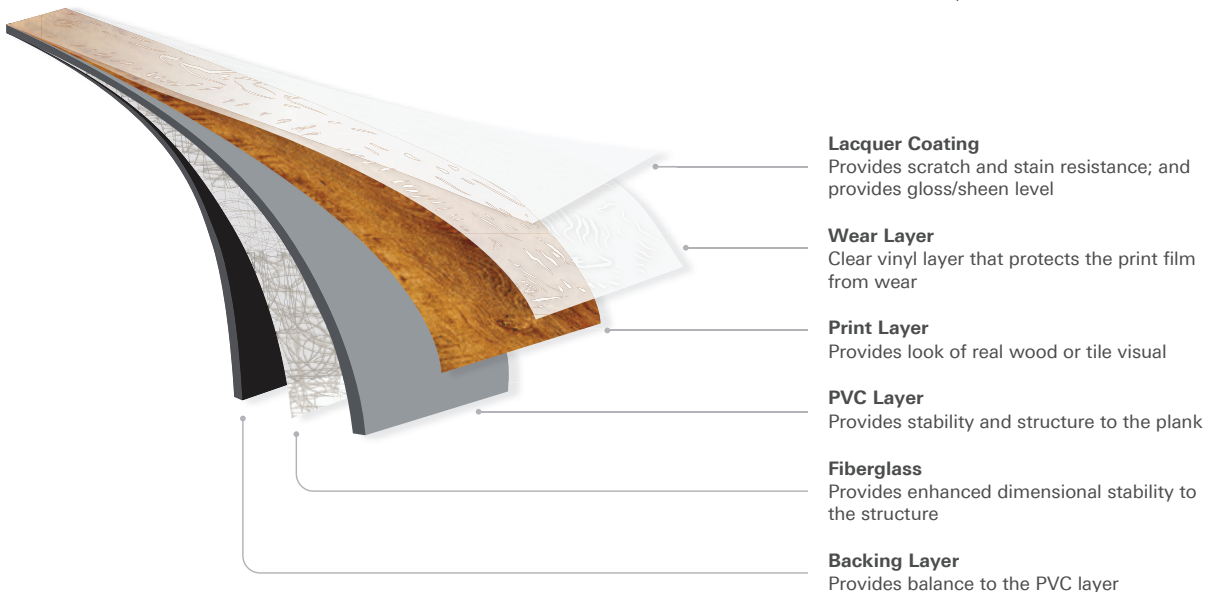

Reconnected Color Options



220 Russet



259 Mocha



310 Wheat



360 Coastal



382 Peanut



849 Tawny



875 Umber



892 Espresso



962 Magma



998 Shadow

Specifications

LVT	Brand	Aladdin Commercial
	Style Name / Number	Reconnected / AH100
	Product Type	Luxury Vinyl Tile (Flex or Flexible)
	Overall Gauge	2mm
	Wear Layer	12 mil
	Finish	Enhanced Urethane Finish
	Colors Available	10
	Size	6" x 48" (Actual)
	Packaging SF/Carton	52 sq.ft/ctn
	Cartons/Pallet	54 ctns/pallet
	Weight/Carton	39.65 lbs/ctn
	Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
	Squareness	ASTM F 2421 - Passes - ±0.10" max
	Size and Tolerance	Tile ASTM F2055; Plank ASTM F2421 - Passes - ±0.016"/linear foot
	Thickness	ASTM F386 - Passes - as specified ±0.005"
	Flexibility	ASTM F137 - Passes - 1" mandrel
	Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
	Static Load Limit	ASTM F970 (modified) - 1500 psi

Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change in surface dylling, surface attack or staining
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Resistance to Heat Flux	ASTM E649 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 Part A - Less than 450
Installation Method	Glue down
Adhesive	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive
Optional Underlayment	Mohawk AccuSound™ - Loose lay; Mohawk ActiveSound - Clic
Certification	FloorScore® Certified
Warranty	Limited 10 Year Light Commercial Warranty Limited 25 Year Residential Warranty

Aladdin[™]
COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.AladdinCommercial.com | 800.233.4490 1116_Oct/2021

