


RULE BREAKER 969 IRON

Create a textural look that will last with Rule Breaker. From the extensive range of warm, rich colors to the durability, Rule Breaker is made for commercial environments.



Clay  
383

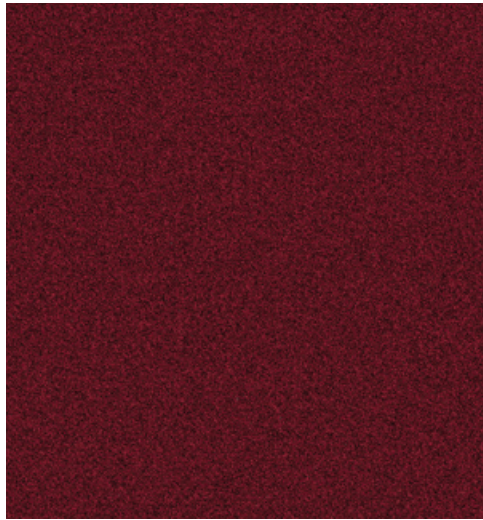

Garnet  
\*385



Cobalt  
589



Navy  
\*599



Greenery  
\*678



Aqua  
\*685



Praline  
748



Wheat  
\*758



Stoney  
\*788

\*New Colors for 2019



Chestnut  
852



Hickory  
869



Walnut  
889



Pewter  
949



Nickel  
959



Iron  
\*969



Twilight  
\*997



Charcoal  
979



Onyx  
999

\*New Colors for 2019

## RULE BREAKER

## RULE BREAKER 20

## RULE BREAKER 26

## RULE BREAKER 26 WELDLOK PLUS

<b>Style Number</b>	AQ94	AQ92 (12') 2B105 (15')	AQ93 (12') 2B106 (15')	2B193
<b>Construction</b>	Tufted	Tufted	Tufted	Tufted
<b>Surface Appearance</b>	Level Loop	Level Loop	Level Loop	Level Loop
<b>Gauge</b>	1/10" (39.37 rows per 10 cm)	1/10" (39.37 rows per 10 cm)	1/10" (39.37 rows per 10 cm)	1/10" (39.37 rows per 10 cm)
<b>Pile Weight</b>	12 oz/yd <sup>2</sup> (407 g/m <sup>2</sup> )	20 oz/yd <sup>2</sup> (678 g/m <sup>2</sup> )	26 oz/yd <sup>2</sup> (882 g/m <sup>2</sup> )	26 oz/yd <sup>2</sup> (882 g/m <sup>2</sup> )
<b>Density</b>	4,716	5,592	5,305	5,305
<b>Dye Method</b>	100% Solution Dyed	100% Solution Dyed	100% Solution Dyed	100% Solution Dyed
<b>Fiber Type</b>	Envirostrand™ SD PET	Envirostrand™ SD PET	Envirostrand™ SD PET	Envirostrand™ SD PET
<b>Soil Release Technology</b>	Mohawk Protection Plus Soil	Mohawk Protection Plus Soil	Mohawk Protection Plus Soil	Mohawk Protection Plus Soil
<b>Primary Backing</b>	Woven Polypropylene	Woven Polypropylene	Woven Polypropylene	Woven Polypropylene
<b>Secondary Backing</b>	Weldlok™	Weldlok™	Weldlok™	Weldlok™ Plus
<b>Indoor Air Quality</b>	Green Label Plus Certified # 0350	Green Label Plus Certified # 0350	Green Label Plus Certified # 0350	Green Label Plus Certified # 0350
<b>Width</b>	12' width (3.66 m)	12' width (3.66 m) and 15' width (4.57 m)	12' width (3.66 m) and 15' width (4.57 m)	12' width (3.66 m)
<b>Pattern Repeat</b>	None	None	None	None
<b>Flammability</b>	ASTM E 648 Class I (Glue Down)	ASTM E 648 Class I (Glue Down)	ASTM E 648 Class I (Glue Down)	ASTM E 648 Class I (Glue Down)
<b>Smoke Density</b>	ASTM E 662 Less than 450	ASTM E 662 Less than 450	ASTM E 662 Less than 450	ASTM E 662 Less than 450
<b>Static Propensity</b>	AATCC-134 Under 3.5 KV	AATCC-134 Under 3.5 KV	AATCC-134 Under 3.5 KV	AATCC-134 Under 3.5 KV
<b>Country of Origin</b>	USA	USA	USA	USA
<b>Warranties</b>	10-Year Limited Wear Warranty 10-Year Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants	10-Year Limited Wear Warranty 10-Year Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants	10-Year Limited Wear Warranty 10-Year Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants	10-Year Limited Wear Warranty 10-Year Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. yd. available within 10 business days or less

EnviroStrand SD