

Bentwood Collection







Coffee	Tea	Beverage
Espresso	Earl Grey Tea	Smoothie
Latte	Chamomile Tea	Yogurt Parfait
Cappuccino	Peppermint Tea	Smoothie Bowl
Macchiato	Green Tea	Hot Chocolate
Flat White	Herbal Tea	Soft Drink
Dirty Chai	Matcha Tea	Energy Drink
Cold Brew	Black Tea	Sparkling Juice
Ice Cream	White Tea	Mocktail
Pastry	Flavored Tea	Smoothie






Bentwood Collection

The Bentwood Collection by Aladdin Commercial offers 9" x 60" LVT planks designed for commercial interior spaces. This collection is a great choice for various commercial applications, as it features six different wood-inspired visuals and is available in three different thickness options. This variety allows for greater flexibility in project budgets and provides more choices for creating seamless transitions between hard and soft surface flooring and coordinating with other products in any space.

Features

- 2 mm, 2.5 mm, and 5.0 mm overall thicknesses
- 9" x 60" planks
- 12 and 20 mil wear layer
- Enhanced Urethane Finish
- FloorScore® Certified
- 10 Year Light Limited Commercial Warranty
- 25 Year Limited Residential Warranty
- Made in the USA

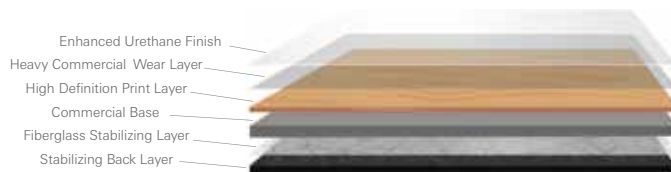

822 Pierre



832 Benton



838 Barkley



848 Wyndale



879 Rutledge



948 Elliot

Specifications

LVT	Brand.....	Aladdin Commercial
	Collection	Bentwood
	Style Name / Number	Bentwood 2.0
	Product Type	Luxury Vinyl Tile
	Overall Gauge.....	2.0 mm
	Wear Layer.....	12 MIL
	Finish.....	Enhanced Urethane
	Colors Available.....	6
	Size	9" x 60" (228.60 mm x 1,524.0 mm)
	Packaging.....	18 Per CTN
	Sf/Carton	66.84 sq. ft.
	Cartons/Pallet.....	52
	Weight / Carton	458.51 oz.
	Emboss	Overall
	Bevel.....	Micro
	Classification	(ASTM F1700) Type B - Embossed
	Squareness.....	(ASTM F 2421) Passes
	Size and Tolerance.....	Plank ASTM F2421 - Passes - $\pm 0.016''$ /linear foot
	Thickness	(ASTM F386) $\pm 0.005''$
	Flexibility	(ASTM F137) Passes
	Dimensional Stability.....	(ASTM F2199) Passes
	Static Load Limit.....	(ASTM F970) 1500 psi
	Residual Indentation.....	(ASTM F1914) Passes
	Resistance to Chemicals.....	(ASTM F925) Passes
	Resistance to Light.....	(ASTM F1515) Passes
	Resistance to Heat Flux	(ASTM E649) >0.45 W/cm ²
	Smoke Density	(ASTM E662) <450
	Installation Method	Glue Down
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Plus
	Optional Underlayment	Mohawk AccuSound™ -Loose lay - Active Sound-Click
	Certification	FloorScore® Certified
	Warranty	Limited 10 Year Light Commercial Warranty Limited 25 Year Residential Warranty

LVT	Brand.....	Aladdin Commercial
	Collection	Bentwood
	Style Name / Number	Bentwood 2.5
	Product Type	Luxury Vinyl Tile
	Overall Gauge.....	2.5 mm
	Wear Layer.....	20 mil (0.5mm)
	Finish.....	Enhanced Urethane
	Colors Available.....	6
	Size	9" x 60" (228.60 mm x 1,524.0 mm)
	Packaging.....	14 Per Ctn
	Sf/Carton	52
	Cartons/Pallet.....	52
	Weight / Carton	728.28 OZ
	Emboss	Overall
	Bevel.....	Micro
	Classification	(ASTM F1700) Type B - Embossed
	Squareness.....	(ASTM F 2421) Passes
	Size and Tolerance.....	Plank ASTM F2421 - Passes - $\pm 0.016''$ /linear foot
	Thickness	(ASTM F386) $\pm 0.005''$
	Flexibility	(ASTM F137) Passes
	Dimensional Stability.....	(ASTM F2199) Passes
	Static Load Limit.....	(ASTM F970) 1500 psi
	Residual Indentation.....	(ASTM F1914) Passes
	Resistance to Chemicals.....	(ASTM F925) Passes
	Resistance to Light.....	(ASTM F1515) Passes
	Resistance to Heat Flux	(ASTM E649) >0.45 W/cm ²
	Smoke Density	(ASTM E662) <450
	Installation Method.....	Glue Down
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Plus
	Optional Underlayment	Mohawk AccuSound™ -Loose lay - Active Sound-Click
	Certification	FloorScore® Certified
	Warranty	Limited 10 Year Light Commercial Warranty Limited 25 Year Residential Warranty

LVT	Brand.....	Aladdin Commercial
	Collection	Bentwood
	Style Name / Number	Bentwood 5.0
	Product Type	Luxury Vinyl Tile
	Overall Gauge.....	5 mm
	Wear Layer.....	20 mil (0.5mm)
	Finish.....	Enhanced Urethane
	Colors Available.....	6
	Size	9" x 60" (228.60 mm x 1,524.0 mm)
	Packaging.....	6 pcs/ctn
	Sf/Carton	22.3 sq. ft.
	Cartons/Pallet.....	60
	Weight / Carton	681.48 oz
	Emboss	Overall
	Bevel.....	Micro
	Classification	(ASTM F1700) Type B - Embossed
	Squareness.....	(ASTM F 2421) Passes
	Size and Tolerance.....	Plank ASTM F2421 - Passes - $\pm 0.016''$ /linear foot
	Thickness	(ASTM F386) $\pm 0.005''$
	Flexibility	(ASTM F137) Passes
	Dimensional Stability.....	(ASTM F2199) Passes
	Static Load Limit.....	(ASTM F970) 1500 psi
	Residual Indentation.....	(ASTM F1914) Passes
	Resistance to Chemicals.....	(ASTM F925) Passes
	Resistance to Light.....	(ASTM F1515) Passes
	Resistance to Heat Flux	(ASTM E649) >0.45 W/cm ²
	Smoke Density	(ASTM E662) <450
	Installation Method	Glue Down
	Adhesive.....	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Plus
	Optional Underlayment	Mohawk AccuSound™ -Loose lay - Active Sound-Click
	Certification	FloorScore® Certified
	Warranty	Limited 10 Year Light Commercial Warranty Limited 25 Year Residential Warranty



Printed on FSC® certified paper

Aladdin™

COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. The use of Mohawk branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.AladdinCommercial.com | 800.233.4490

