



Better Together

 Mohawk Group



**Better Together** enhanced resilient tile creates beautifully unique flooring designs, whether used on its own or as a perfect system with Mohawk Group carpet tile. From the neutral palette and range of refined visuals down to the carefully chosen dimensions, Better Together can be mixed and matched easily with any carpet tile selection or among any of its colorways, giving you endless design potential.

---

#### KEY FEATURES

- Better Together is perfect on its own or mixed with Mohawk Group carpet tile.
- Same thickness as carpet tile means no transitions are needed between ERT and carpet tile.
- Modular sizing with Mohawk Group carpet tiles and planks for unique and creative installations.
- When Better Together ERT and carpet tiles are installed together, use a single adhesive, Mohawk EnPress.

Cover. Better Together | 955 Fresco, 946 Granita, 986 Twilight, 711 Linen, 646 Imagine, 736 Spalding;  
Metalmorphic | 859 Downing Stone Metallic, 862 Canyon Clay Metallic, 983 Clean Slate Metallic;  
Statement Stone | 859 Downing Stone, 862 Canyon Clay



Better Together | 646 Imagine; Macro Bloom | 941 Goldspeck



Better Together enhanced resilient tile works brilliantly on its own. But when complemented with any of our carpet tile collections, the results are even better.

Better Together | 652 Mythical







The colorways and tile and plank sizes are designed to mix effortlessly with carpet tile, giving every space a uniquely custom aesthetic.

Better Together | 241 Rockwood





Better Together | 241 Rockwood; Integrate | 999 Asphalt, 983 Masonry



Better Together | 711 Linen, 884 Ancestral



---

## Better Together Features


- Variety of visuals provide multiple patterns and colors featuring wood, watercolor stone and concrete
- Range of modular sizes allow unique and creative installations – 4”x36”, 12”x36”, 8”x48” and 24”x24” – all designed to work with Mohawk Group carpet tile
- 5mm thickness allows seamless flow from hard surface flooring to carpet without use of transitions
- Better Together glue down installation – use MS160 Spray Adhesive, M95.0 Adhesive, or M700 PSA
- Better Together with Mohawk Carpet tile – EnPress adhesive may be used for both products
- 20 mil wear layer for superior durability
- M-Force™ Ultra Enhanced Urethane Finish
- FloorScore® Certified
- Limited 10 Year Commercial Warranty

---

## Glue Down ERT Construction

Better Together enhanced resilient tile features a 20 mil commercial wear layer with an M-Force™ Ultra Enhanced Urethane Finish that is polish-optional for versatile, cost-effective maintenance.

M-Force™ Ultra Enhanced Urethane Finish —  
Heavy Commercial Wear Layer —  
Decorative Print Layer —  
Commercial Base —  
Stabilizing Backing Layer —

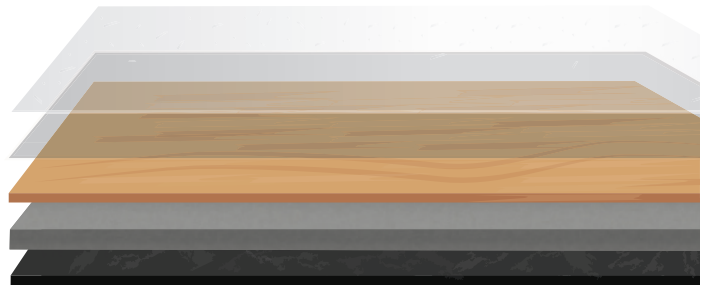

# Better Together

---


## Colorways

**Better Together** enhanced resilient tile brings hard and soft surface flooring together in perfect harmony.


4" x 36"




12" x 36"

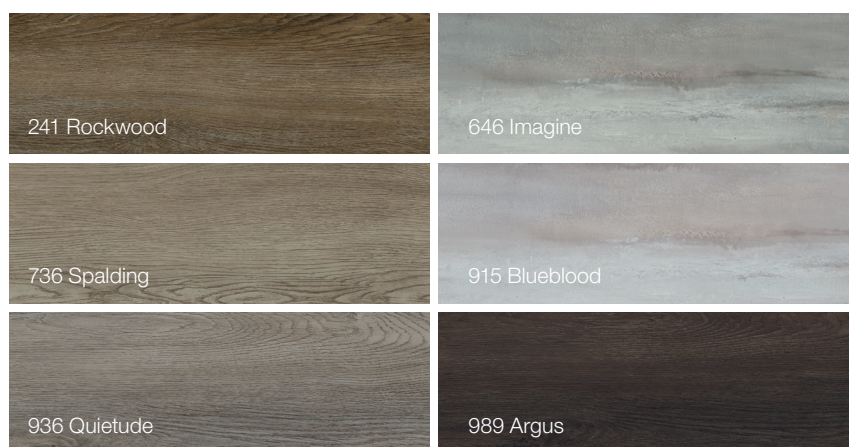

8" x 48"

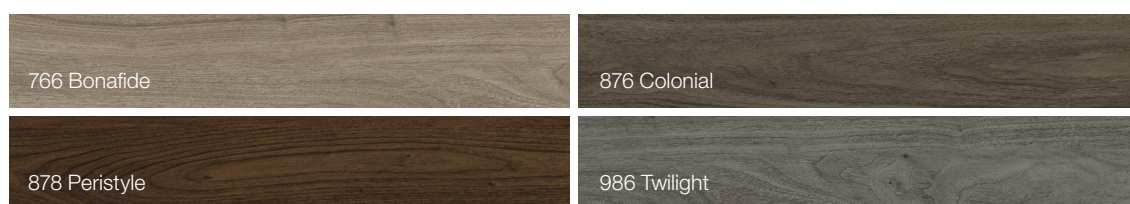

24" x 24"

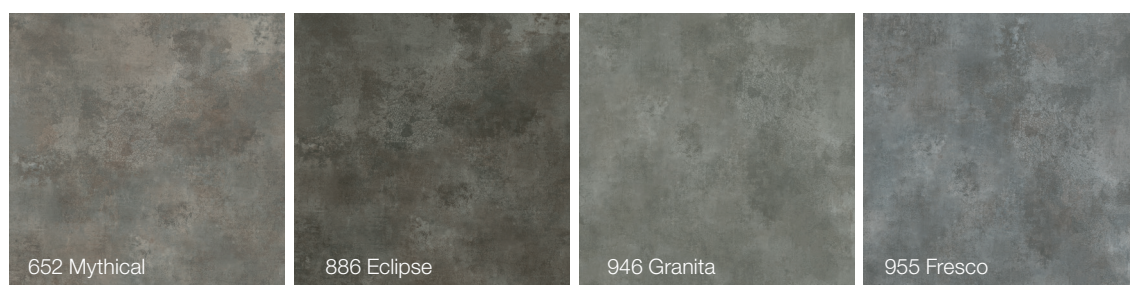

# Specifications

Style Names	Better Together
Style Number	C0097
Brand	Mohawk Group – Hard Surface
Product Type	Enhanced Resilient Tile



## DESIGN

Overall Gauge	5mm (.20")
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra Enhanced Urethane Finish
Texture	Yes
Sizes / Colors Available	4" x 36" - 2 Colors 8" x 48" - 4 Colors 12" x 36" - 6 Colors 24" x 24" - 4 Colors
Packaging	
4" x 36"	16 sf/ctn; 16 pcs/ctn; 29 lbs/ctn
8" x 48"	16 sf/ctn; 6 pcs/ctn; 29 lbs/ctn
12" x 36"	18 sf/ctn; 6 pcs/ctn; 33 lbs/ctn
24" x 24"	16 sf/ctn; 4 pcs/ctn; 29 lbs/ctn
Installation	Glue Down
Required Adhesive	MS160 Spray Adhesive, M95.0 Resilient Flooring Adhesive, M700 Pressure Sensitive Adhesive
Alternate Adhesive	Mohawk EnPress Adhesive (single adhesive may be used for Better Together and Mohawk Group carpet tile when used in combined installation).



## PERFORMANCE

Construction	Commercial Grade Enhanced Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2421 - Passes - $\pm 0.10$ " max
Size and Tolerance	ASTM F2421 - Passes - $\pm 0.16$ "/linear foot
Thickness	ASTM F386 - Passes - as specified $\pm 0.005$ "
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Slip Resistance	ASTM C1028 - Passes - Wet: $\geq 0.5$
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes - $\Delta E < 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E < 8$
Critical Radiant Flux	ASTM E648 - Class 1 ( $>0.45$ W/cm <sup>2</sup> )
Smoke Density	ASTM E662 Part A - Less than 450



## SUSTAINABILITY

Certification	FloorScore® Certified
---------------	-----------------------



## SERVICE

Warranty	Limited 10 Year Commercial Warranty
----------	-------------------------------------

Mohawk Group

Mohawk Group  
160 South Industrial Blvd.  
Calhoun, GA. 30701  
1-800-554-6637  
mohawkgroup.com

C0097 PHOTO BROCH LT