



Intertwined
Collection








Global Entry Collection

Resilient Tile: Global Entry, Morikato, color 321

 Mohawk Group

Global Entry features hardwood species from across the world in a collection of contemporary colors and realistic wood textures. The commercial grade wear layer and M-Force™ Enhanced Urethane finish ensures product performance through the life of the installation.


Antiek hails from Scandinavia where wide, natural woods are regaled for their inherent beauty. Each plank is embossed with a wood texture that perfectly aligns with the grain pattern, a process called “Embossed in Register”, achieving the most realistic visual possible in a resilient tile. Colorways span from cool to warm, and specie designs are offered in rustic or clean grades of oak. Antiek planks are 9” wide and 48” long for a look that is authentic to European hardwoods, and a format that installs quickly across large areas.

Morikato takes inspiration from the Japanese word meaning “Forest”, offering a vast color line of timeless hardwood visuals like cutting edge charred wood, cerused grains and linear composite styles. The color palette builds on the distressed, reclaimed looks in both cool and warm tones, as well as provides sophisticated upgrades to classic maple, cherry and chestnut hardwood species. The 7” x 48” planks follow current format trends yet are neutral enough to satisfy a wide variety of projects and end use segments.

- Wide range of visuals to accommodate a variety of end use segments and design schemes
- Grain textures in Antiek perfectly align with pattern for the most realistic wood look possible
- M-Force™ Enhanced Urethane finish for superior wear and scratch resistance
- 20 mil wear layer performs under commercial traffic
- No-polish maintenance reduces costs associated with long-term cleaning
- FloorScore® certified
- QuickShip available

Unibond Plus

For High Performance Environments

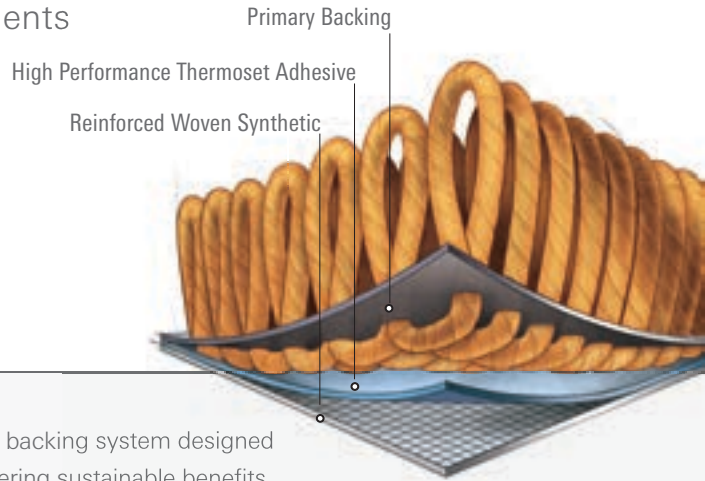

Unibond® Plus is an advanced high performance backing system designed to provide long term carpet durability while delivering sustainable benefits. The Unibond Plus backing system utilizes a high performance thermoset adhesive designed to deliver greater dimensional stability and long term performance by encapsulating the carpet back stitch, and securing the secondary backing to the substrate. This advanced thermoset adhesive contains a minimum of 22% pre-consumer recycle content by total product weight. Unibond Plus is ideal for high performance environments.



PERFORMANCE

- High performance backing designed for demanding commercial environments
- Greater dimensional stability - no growing or shrinking
- High tuft bind properties
- Eliminates edge ravel and zippering
- For use with direct glue or stretch in installations
- Limited Lifetime Warranty protects against tuft bind, edge ravel, zippering and delamination
- Excellent choice for demanding commercial environments



BUDGET

- High performance backing offering meets most budget requirements



SUSTAINABILITY

- Recyclable
- Contains a minimum 22% pre-consumer recycle content by total product weight
- May contribute to or comply with LEED credits MR 4.0, MR 5.0, IEQ 4.3 and innovation credit for NSF 140
- Certified Gold in accordance with NSF / ANSI 140
- Certified low VOC's under CRI Green Label Plus Program



SERVICE

- Compliant with LEED EQ 4.1 low VOC emitting when installed with Mohawk Group recommended adhesive and seam sealer
- Products available through Quickship offering (up to 2,000 square yards within 10 business days)

**See Mohawk Group official warranty documents for further details at www.mohawkgroup.com
LEED and the related logo is a trademark owned by the U.S. Green Building Council and is used with permission.*


BROADLOOM

Style Name / Number	Broken Checks / BC403 / BQ403
Construction	Tufted
Surface Appearance	Textured Patterned Cut & Loop
Gauge	1/12" (47.00 rows per 10 cm)
Tufted Weight	28.5 oz/yd ² (966 g/m ²)
Dye Method	Solution Dyed
Fiber Type	Colorstrand® SD Nylon
Stain Release Technology ...	Sentry Plus Stain Protection
Soil Release Technology	Sentry Soil Protection
Backing Material	Unibond Plus
Indoor Air Quality	Green Label Plus Certified # 3802
NSF 140	Gold
Width	12' width (3.66m)
Pattern Repeat	18" (W) x 6" (L)
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Warranties: Lifetime Limited	Unibond Plus Warranty, Lifetime
Limited Colorfastness to Light,	10 Year Limited Colorfastness to
Atmospheric Contaminants,	10 Year Stain Warranty, Lifetime Static

BROADLOOM

Style Name / Number	Gathered Style / BC404 / BQ404
Construction	Tufted
Surface Appearance	Textured Patterned Cut & Loop
Gauge	1/12" (47.00 rows per 10 cm)
Tufted Weight	28.5 oz/yd ² (966 g/m ²)
Dye Method	Solution Dyed
Fiber Type	Colorstrand® SD Nylon
Stain Release Technology ...	Sentry Plus Stain Protection
Soil Release Technology	Sentry Soil Protection
Backing Material	Unibond Plus
Indoor Air Quality	Green Label Plus Certified # 3802
NSF 140	Gold
Width	12' width (3.66m)
Pattern Repeat	18" (W) x 12.8" (L)
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Warranties: Lifetime Limited	Unibond Plus Warranty, Lifetime
Limited Colorfastness to Light,	10 Year Limited Colorfastness to
Atmospheric Contaminants,	10 Year Stain Warranty, Lifetime Static

For LVT spec information, visit our website at www.mohawkgroup.com



Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com



Produced with recycled materials