



KARASTAN



From classic craftsmanship to innovative design technology, Karastan sets an aesthetic and performance pace that others follow. Specify Karastan for your next commercial interior, and create your own legacy.





A Different Angle | Woven Broadloom Installation, color 919





A Different Angle | Woven Broadloom Installation, color 919






A Different Angle, color 919, combined with Urban Patina, color 879



Urban Patina

Resilient Tile: Clic Step, Urban Patina | Carpet: A Different Angle

 Mohawk Group

This highly versatile floor offers delightful innovation with never-before-seen visuals in fresh, unique colorways. The Uniclic® locking system is milled into all four sides, producing a tight connection that installs quickly. A commercial grade wear layer and M-Force™ Enhanced Urethane finish ensure performance under heavy commercial traffic. The adhesive-free construction works over existing flooring and saves time and costs.

Urban Patina delivers a bit of mystery: its unusual mix of known species and organic inspired patterns provide hints of wood visuals without exactly replicating any specific type. Various textures ranging from linear to hardscraped are available in an easy-to-install 7" x 48" size.

- Commercial grade wear layer and M-Force™ Enhanced Urethane finish
- Uniclic® locking system for fast, adhesive-free installation
- Four-sided locking system prevents plank separation ensuring a tight fit
- Installs on slabs with up to 95% RH and contains added antimicrobial
- More forgiving over uneven subfloors and is move-in ready
- Contains 30% recycled content
- FloorScore® certified

| | | |
|--|-------------------------------|--|
| WOVEN | Brand | Karastan |
| | Style Name / Number | A Different Angle / KC234 |
| | Construction | Woven |
| | Surface Appearance | Textured Heathered Loop |
| | Pitch | 216 (315 ends per meter) |
| | Woven Weight | 32 oz/yd ² (1085 g/m ²) |
| | Dye Method | Solution Dyed |
| | Fiber Type | duracolor. Premium Nylon |
| | Stain Release Technology ... | Permanent, Built into the Fiber |
| | Soil Release Technology | Sentry Soil Protection |
| | GSA Stain Release Rating | Passes |
| | Indoor Air Quality | Green Label Plus Certified # 3802 |
| | NSF 140 | Gold |
| | Width | 12' width (3.66m) |
| | Pattern Repeat | 4" (W) x 1.5" (L) |
| | Flammability | ASTM E 648 Class 1 (Glue Down) |
| | Smoke Density | ASTM E 662 Less than 450 |
| Static Propensity | AATCC-134 Under 3.5 KV | |
| Warranties: Lifetime Limited Wear Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static | | |

| | | |
|--|-------------------------------|--|
| WOVEN | Brand | Karastan |
| | Style Name / Number | Uncommon Thread / KC223 |
| | Construction | Woven |
| | Surface Appearance | Textured Heathered Loop |
| | Pitch | 216 (315 ends per meter) |
| | Woven Weight | 30 oz/yd ² (1017 g/m ²) |
| | Dye Method | Solution Dyed |
| | Fiber Type | duracolor. Premium Nylon |
| | Stain Release Technology ... | Permanent, Built into the Fiber |
| | Soil Release Technology | Sentry Soil Protection |
| | GSA Stain Release Rating | Passes |
| | Indoor Air Quality | Green Label Plus Certified # 3802 |
| | NSF 140 | Gold |
| | Width | 12' width (3.66m) |
| | Pattern Repeat | 2" (W) x 0.5" (L) |
| | Flammability | ASTM E 648 Class 1 (Glue Down) |
| | Smoke Density | ASTM E 662 Less than 450 |
| Static Propensity | AATCC-134 Under 3.5 KV | |
| Warranties: Lifetime Limited Wear Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static | | |

For LVT spec information, visit our website at www.mohawkgroup.com

Mohawk Group

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Duracolor by Mohawk Stain Resistant System passes GSA requirements for permanent stain resistance. Under GSA requirements stain resistant carpets must score no less than 8.0 (10.0 is best) on the AATCC Red 40 Stain Scale. Carpet samples must first be exposed to 100 revolutions of the Taber abrader (1,000-gram weight per H-18 wheel) and then the abraded area must be stain tested using AATCC tested using AATCC test method 175.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com



Timeless Today

A collection of polished greys,
from silvery mist to black smoke.

PALETTES








Tradition Reinvented

A collage of beiges cool and rich — white oak to charred mahogany.

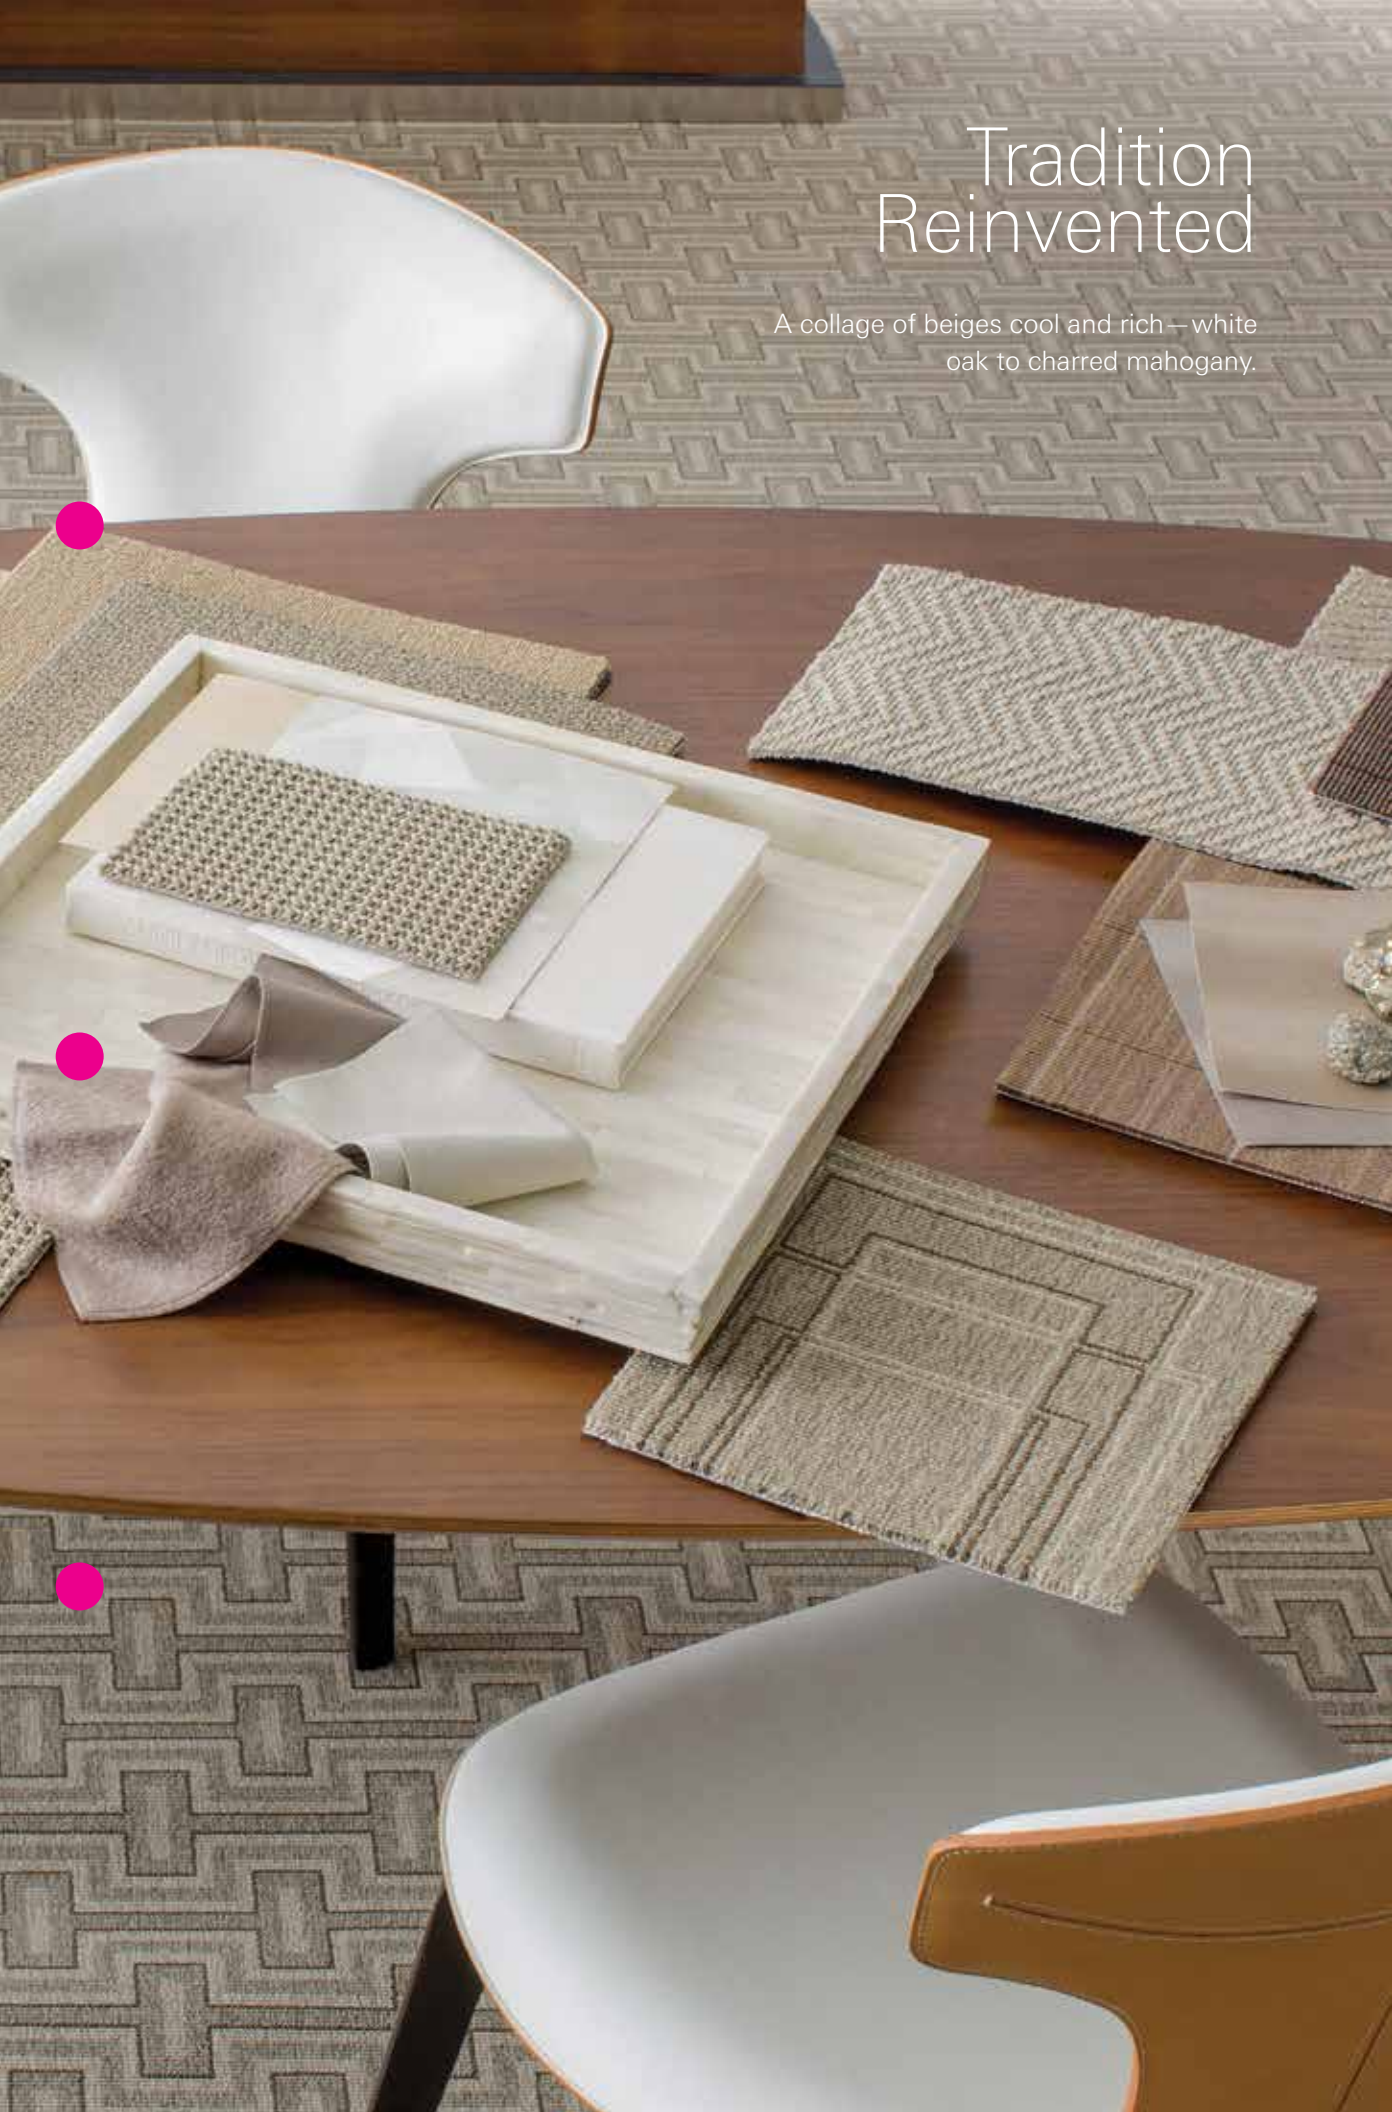





Sophistication Now

Taupes composed from raw silk to aged driftwood.

