

On The Sce Collection







Hustle & Bustle | Vertical Ashlar Installation, color 949 Luxury Vinyl Tile: Hot and Heavy | C0009 Secoya, color 945

10

## Hot & Heavy Collection

Hot & Heavy Floating LVT lives up to its name. The bold, oversized formats are the hottest thing in flooring and are made possible due to the loose lay construction. Each jumbo tile and plank is coated with a non-skid backing that together, with the substantial weight of the product, keep tiles on the floor even under true commercial traffic. Hot & Heavy not only looks amazing, but works to reduce sound transfer and subfloor prep for a fashionable, practical commercial flooring solution.

#### Secoya

The 9" x 59" plank replicates a modern hardwood look and is available in a variety of textures from linear to hand-scraped. Each plank is accentuated with a beveled edge to showcase the large format. Oak and Cherry species are offered in a full range of colors for an authentic wood visual.

#### Bolder

The 36" x 36" tiles have the effect of polished concrete slabs, but install with a fraction of the time and expense. This modern format looks bold and interesting and serves to install quickly across large areas.

#### Construction


Hot & Heavy is designed with a 5 mm thickness that is more forgiving of subfloors than other luxury vinyl tiles. Perfect for multi-story properties, material tests at 57 IIC without underlayments for quiet acoustics. The collection is made with 59 percent recycled content, an added anti-microbial and is FloorScore<sup>®</sup> Certified. The M-Force<sup>™</sup> Enhanced Urethane Finish is reinforced with ceramic crystals, offering protection under heavy foot traffic with polish-optional maintenance.

#### **Recommended Applications**

- Retail high traffic areas
- Hospitality rooms, public space, restaurants
- Corporate break rooms, offices, lobbies
- Education dormitories, student centers, classrooms
- Senior Living all spaces within independent living properties

#### Selling Features

- Commercial grade wear layer and M-Force<sup>™</sup> Enhanced Urethane Finish
- Oversize formats look great and install over large areas quickly
- Non-skid backing eliminates the need for adhesive
- Immediate move-in
- Installs over slabs with up to 95% RH
- IIC Rating of 57 without underlayment
- 59% Recycled Content and FloorScore Certified
- QuickShip Program

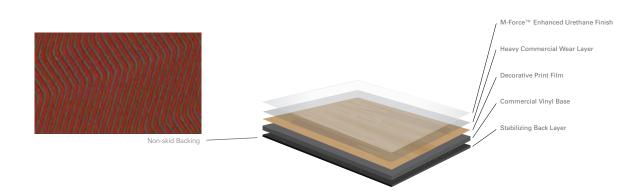

## 

The performance standard for every application, Duracolor fiber is forever stain free, forever sustainable and forever beautiful, guaranteed\*. Carpet is easy to maintain with inherent stain resistance and water-only stain removal.

#### FOREVER STAIN FREE

- Permanent built in protection
- Resists 99% of all stains
- Passes the GSA Test Method for stain resistance: AATCC Test Method 175
- Duracolor Warranty: We guarantee it

#### FOREVER SUSTAINABLE

- Made with 30% recycled content: 25% pre-consumer & 5% post-consumer
- No Chemicals required: 96% of all common stains clean with just water
- Declare Red List Free: Duracolor fiber is Declare red list free in accordance with the Living Building Challenge

- Lasts Longer: Product life is extended, reducing the impact to your bottom line and to the environment
- Recyclable through Mohawk's ReCover Program

#### FOREVER BEAUTIFUL

- Available in more than 300 colors
- Unsurpassed colorfastness to light and atmospheric contaminants so colors won't fade
- Unmatched design flexibility without compromising color retention or stain resistance
- Proven track record of success over the past 20 years



Duracolor



Competitor Solution Dyed / Yarn Dyed Blend

\* See Mohawk Group official warranty documents for further details at www.mohawkgroup.com

# **ColorBeat**

Solid, all loop textured tile available in 48 colors. Select colors also available as 12x36 plank. Install as a border, inset or accent tile.

Lemon Zest	Ground Turmeric	Mustard Seed	Electric Orange	Cajun Spice	Sundried Tomato	Tango
#121	#142	#168	#252	#258	#352	#353
Mulled Wine	Scarlet	Aubergine	Kaleidoscope	Passion Purple	Sterling Gray	Kingfisher
#354	#374	#384	#453	#483	#529	#545
Jazz	Moroccan Tile	Hazy	Aquatic	Indigo Batik	National Blue	Spanish Moss
#546	#555	#559	#566	#575	#595	#629
Wheatgrass	Limeade	Parakeet	Calypso	Cypress Grove	Zucchini	Driftwood
#631	#641	#646	#655	#675	#676	#678
Hemlock	Secret Garden	Eggshell	Toasted Almond	Jute	Malt	Latte
#686	#699	#717	#721	#726	#758	#833
Tarnished Brass #841	Tree Bark #862	Henna #863 	Portabello #866	Espresso #883	Peppercorn #889	Chalk Dust #917
Lunar #933	Stainless #934 □	Graphite #964	Brushed Metal #976	Inkwell #985	Black Bean #996	

24BY24 🗌 12BY36 🗔



	1	
F	berglass Scrim	
Pre-Coa	t Polymer	
Premium Vinyl Po	olymer	
lar backing system		
	4.5	

Primary Backing

EcoFlex<sup>™</sup> ICT is a premium vinyl modular backing system containing a minimum of 35% recycled content. With over 15 years in the marketplace, its ultra dense construction is engineered to offer superior performance while giving greater cushioning properties.



## Unsurpassed dimensional

- stability no growing or shrinking

  Constructed with an ultra dense
- five layer cushion backing system
  Main body of tile provides an effective moisture barrier (not applicable at the seams)
- Tiles are impervious to moisture damage from spills and water extraction cleaning
- Construction features superior tuft bind that is highly resistant to edge ravel
- Proven performance for over 15 years



• Superior construction offers reliability for the life of your installation



### SUSTAINABILITY

- EcoFlex ICT contains 35% minimum pre consumer recycled content by total weight\*
- Recyclable through Mohawk's
   ReCover program
- EcoFlex ICT may contribute to or comply with LEED<sup>®</sup> credits MR 4.0, IEQ 4.3 and Innovation credit for NSF 140
- CRI Green Label Plus certified
- Free of EPA phthalates of concern

- Certified at the Gold Level in accordance with NSF/ANSI 140 the Sustainability Assessment for Carpet
- NSF/ ANSI 140 Platinum level version available with a minimum of 10% post-consumer recycled content



• Engineered performance for an overall better after sales service experience

\* Recycled content claim third party verified by UL (Underwriters Laboratory)

24BY24

Brand	lees
Style Name / Number	Late Night / GT306
Construction	-
Surface Appearance	Patterned Tip Shear
Gauge	1/12" (47.00 rows per 10 cm)
Dye Method	Solution Dyed
Fiber Type	duracolor. Premium Nylon
Stain Release Technology	Permanent, Built into the Fiber
Soil Release Technology	Sentry Soil Protection
GSA Stain Release Rating	Passes
Backing Material	EcoFlex ICT
Indoor Air Quality	Green Label Plus Certified # 1098
NSF 140	Gold
Size	24" x 24" (.6096 m x .6096 m)
Installation Method	Quarter Turn / Monolithic /
	Brick Ashlar / Vertical Ashlar /
	Multi Directional
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC - 134 Under 3.5 KV
Warranties: Lifetime Limited	Carpet Tile Warranty, Lifetime Limited
Duracolor Stain Warranty, Lif	etime Static

24BY24	Brand Style Name / Number Construction Surface Appearance Gauge Dye Method Fiber Type Stain Release Technology Soil Release Technology GSA Stain Release Rating Backing Material Indoor Air Quality NSF 140 Size Installation Method	Tufted Patterned Tip Shear 1/12" (47.00 rows per 10 cm) Solution Dyed duracolor. Premium Nylon Permanent, Built into the Fiber Sentry Soil Protection Passes EcoFlex ICT Green Label Plus Certified # 1098 Gold 24" x 24" (.6096 m x .6096 m) Quarter Turn / Monolithic / Brick Ashlar / Vertical Ashlar /
	Size	24" x 24" (.6096 m x .6096 m) Quarter Turn / Monolithic /
	Flammability Smoke Density Static Propensity Warranties: Lifetime Limited ( Duracolor Stain Warranty, Life	ASTM E 662 Less than 450 AATCC - 134 Under 3.5 KV Carpet Tile Warranty, Lifetime Limited


24BY24

Brand	Lees
Style Name / Number	Streetscapes / GT308
Construction	Tufted
Surface Appearance	Patterned Tip Shear
Gauge	1/12" (47.00 rows per 10 cm)
Dye Method	Solution Dyed
Fiber Type	duracolor. Premium Nylon
Stain Release Technology	Permanent, Built into the Fiber
Soil Release Technology	Sentry Soil Protection
GSA Stain Release Rating	Passes
Backing Material	EcoFlex ICT
Indoor Air Quality	Green Label Plus Certified # 1098
NSF 140	Gold
Size	24" x 24" (.6096 m x .6096 m)
Installation Method	Quarter Turn / Monolithic /
	Brick Ashlar / Vertical Ashlar /
	Multi Directional
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC - 134 Under 3.5 KV
Warranties: Lifetime Limited	Carpet Tile Warranty, Lifetime Limited
Duracolor Stain Warranty, Lif	etime Static

For ColorBeat and LVT spec information, visit our website at www.mohawkgroup.com

#### Installation Instructions:

Monolithic	Quarter Turn	Brick Ashlar	Vert. Ashlar	Multi-Directio
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c c} \uparrow \rightarrow \uparrow \\ \hline \rightarrow \uparrow \rightarrow \\ \hline \uparrow \rightarrow \uparrow \end{array}$		$\begin{array}{c} \uparrow & \uparrow \\ \uparrow & \uparrow \\ \uparrow & \uparrow \\ \uparrow & \uparrow \end{array}$	$\begin{array}{c} \uparrow \downarrow \leftarrow \\ \rightarrow \uparrow \rightarrow \\ \leftarrow \rightarrow \downarrow \end{array}$



Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

onal

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Duracolor by Mohawk Stain Resistant System passes GSA requirements for permanent stain resistance. Under GSA requirements stain resistant carpets must score no less than 8.0 (10.0 is best) on the AATCC Red 40 Stain Scale. Carpet samples must first be exposed to 100 revolutions of the Taber abrader (1,000-gram weight per H-18 wheel) and then the abraded area must be stain tested using AATCC tested using AATCC tested to the state method 175.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com

recover system regions 877-3RE-CYCL



