


# ULTRASET® NXT

PVC-free carpet tile backing for demanding commercial environments

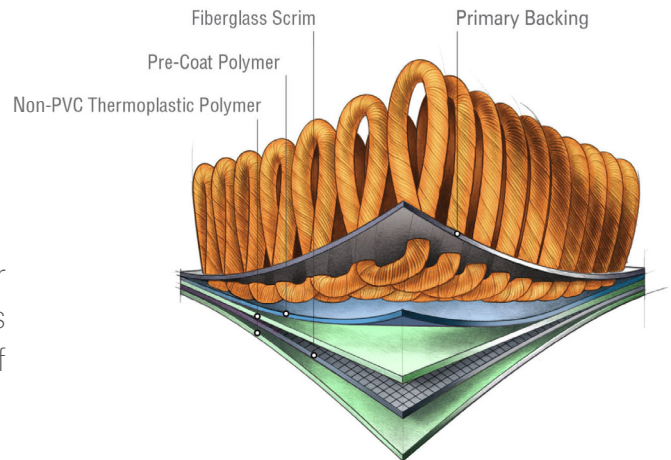

A model of sustainable design, Ultraset NXT is a PVC-free backing that is up to 40% lighter than similar PVC products, making it easier to install and less expensive to ship. It also incorporates a minimum of 35% pre-consumer recycled content.

## Performance

- Provides permanent tile dimensional stability.
- Tiles are impervious to moisture damage from spills and water extraction cleaning.
- Main body of tile provides an effective moisture barrier (not applicable at the seams).
- Available on select running line products and on special order basis with low minimums on any Mohawk carpet tile product.
- Construction features superior tuft bind that is highly resistant to edge ravel.

## Sustainability

- Contains no plasticizers, no PVC.
- Contains a minimum of 35% pre-consumer recycled content based on total product weight\*.
- Certified at the gold level in accordance with NSF/ANSI 140.
- NSF/ANSI 140 Platinum level version available with a minimum of 10% post-consumer recycled content.
- Ultraset NXT may contribute to or comply with LEED credits MR 4.0, IEQ 4.3 and Innovation credit for NSF 140.
- CRI Green Label Plus certified.

## Budget

- 40% lighter than PVC = cost savings in shipping.
- Superior construction offers reliability for the life of your installation.

## Service

- Engineered performance for an overall better after sales service experience.

# ULTRASET® NXT

PVC-free carpet tile backing for demanding commercial environments

## INSTALLATION SPECIFICATIONS

Backing	Required Adhesive	Moisture & pH	Adhesive Application Method/ Spread Rate
Ultraset® NXT	EnPress PSA (M004R)	5lbs, 80% RH, 5-9 pH	3/8" Nap Roller - 140/160 sq. yds. 1/16" x 1/32" x 1/32" U Notch Trowel - 100-120 yards (4 Gal)
Floating Installation Adhesive Tabs	Adhesive Application Method	Moisture & pH	Installation Method/ Spread Rate
FLEXLOK (FLXTB)	Apply to back of the tiles per installation guidelines OR Refer to installation guidelines	5lbs, 99% RH, 5-9 pH	Monolithic, Quarter Turn, Multidirectional - 150 SY/Box  Brick and Vertical Ashlar - 110 SY/Box

NOTE: Mohawk Optiseal required for installations with subfloor moisture exceeding 5 lbs and/or 80% RH.  
Maximum allowable moisture with Optiseal is 90% RH.

### LIFETIME LIMITED WARRANTY\*

**WEAR** - Mohawk warrants for the life of the carpet that the carpet tiles will not wear more than 10% of the surface pile for the life of the carpet. "Wear" means the fiber loss from the carpet tiles through normal abrasion and does not include crushing, flattening of the carpet pile in any area, staining, soiling, fading, change in carpet module appearance, nor fiber loss due to abnormal usage of the carpet tile.

**STATIC PROTECTION** - Mohawk warrants for the life of the carpet that the carpet tiles will not give static discharges in excess of 3.5 KV when tested under AATCC Test Method 134-1979.

**EDGE RAVEL/ZIPPERING** - Mohawk warrants for the life of the carpet that the carpet tiles will not zipper or develop continuous "pile yarn runners."

**DELAMINATION** - Mohawk warrants for the life of the carpet that the carpet tiles will not delaminate. Chair pads are not required for this warranty but are recommended for maximum appearance retention.

**LIFETIME LIMITED DIMENSIONAL STABILITY** - Mohawk warrants for the life of the carpet that the carpet tiles will not lose their dimensional stability (i.e. shrink, grow, cup, dome) due to normal variations in atmospheric changes (temperature and/or humidity) or when maintained in accordance with the Mohawk's recommended maintenance procedures.

\* See Mohawk official warranty documents for further details at [www.mohawkflooring.com](http://www.mohawkflooring.com)  
LEED and the related logo is a trademark owned by the U.S. Green Building Council is used with permission.