



EcoFlex™ Echo / Clay Create


Carpet Tiles

Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Construction Structure - Structuur - Konstruktion		Tufted 1/12" gauge loop
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutzschicht		100% solution dyed nylon
Secondary backing Envers - Rug - Beschichtung		EcoFlex™ Echo (94% Recycled Felt)
Total weight Poids total - Totaal gewicht - Gesamtgewicht		± 4700 g/m ²
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht		± 600 g/m ²
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutzschichtgewicht		± 384 g/m ²
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke		± 9,2 mm
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke		± 3,4 mm
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte		± 0,115 g/cm ³
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl		205.000/m ²
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307	33 / LC1
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985	A: intensive use
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1	Bfl-s1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986	≤ 0,2%
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02	≥ 7
Rubbing fastness Solidité au frottement - Wrijftechtheid - Reibechtheit	EN ISO 105-X12	≥ 4
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01	≥ 4
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302	0,127 m ² .K/W
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354	0,25 <i>a</i> w Hz 125 250 500 1000 2000 4000 a s 0,02 0,03 0,3 0,22 0,32 0,48
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3	ΔLw = 31 dB
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356	≤ 2 kV
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben		12
Size & Packaging Dimensions & Emballage - Formaats en verpakking - Abmessungen & Verpackung		25 x 100 cm 4 m ² /box - 24 boxes/pallet
GUT-Produs Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Produs Nummer		5E8698AB

We reserve all rights for technical improvements. 09/2022

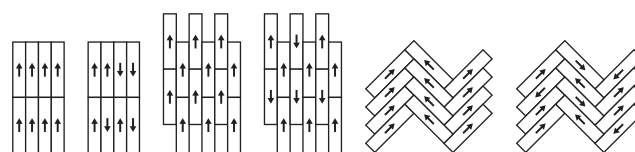




Colorways



Clay Create 325

Colour code: 325
Colour: Orange rust, Red




Clay Create 339

Colour code: 339
Colour: Black, Red burgundy




Clay Create 556

Colour code: 556
Colour: Blueteal




Clay Create 594

Colour code: 594
Colour: Grey, Blueteal



Clay Create 599

Colour code: 599
Colour: Black, Blueteal




Clay Create 699

Colour code: 699
Colour: Black, Green




Clay Create 872

Colour code: 872
Colour: Beige, Brown



Clay Create 887

Colour code: 887
Colour: Brown




Clay Create 955

Colour code: 955
Colour: Grey




Clay Create 977

Colour code: 977
Colour: Grey, Taupe



Clay Create 979

Colour code: 979
Colour: Grey, Black



Clay Create 987

Colour code: 987
Colour: Black, Brown