



Mohawk Group

EcoFlex™ Echo / Clay


Carpet Tiles

Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen


Construction Structure - Structuur - Konstruktion		Tufted 1/12" gauge loop
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutschicht		100% solution dyed nylon
Secondary backing Envers - Rug - Beschichtung		EcoFlex™ Echo (94% Recycled Felt)
Total weight Poids total - Totaal gewicht - Gesamtgewicht		± 4700 g/m ²
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht		± 600 g/m ²
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutschichtgewicht		± 370 g/m ²
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke		± 9,2 mm
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke		± 2,9 mm
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte		± 0,127 g/cm ³
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl		224.400/m ²
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307	33 / LC1
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985	A: intensive use
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1	Bfl-s1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986	≤ 0,2%
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02	≥ 7
Rubbing fastness Solidité au frottement - Wrijftechtheid - Reibechtheit	EN ISO 105-X12	≥ 4
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01	≥ 4
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302	0,127 m ² .K/W
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354	0,25 a w Hz 125 250 500 1000 2000 4000 a s 0,02 0,03 0,3 0,22 0,32 0,48
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3	ΔLw = 31 dB
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356	≤ 2 kV
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben		12
Size & Packaging Dimensions & Emballage - Formaats en verpakking - Abmessungen & Verpackung		25 x 100 cm 4 m ² /box - 24 boxes/pallet
GUT-Produs Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Produs Nummer		E4C2F79C

We reserve all rights for technical improvements. 09/2022

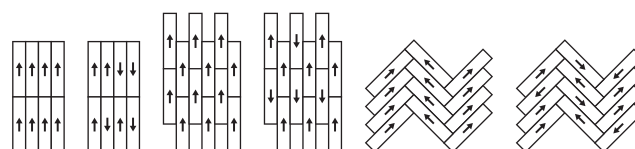




Colorways



Clay 273

Colour code: 273
Colour: Orange rust




Clay 363

Colour code: 363
Colour: Red burgundy




Clay 545

Colour code: 545
Colour: Blueteal




Clay 569

Colour code: 569
Colour: Blueteal



Clay 685

Colour code: 685
Colour: Green




Clay 789

Colour code: 789
Colour: Beige




Clay 848

Colour code: 848
Colour: Brown



Clay 911

Colour code: 911
Colour: Grey



Clay 959

Colour code: 959
Colour: Grey




Clay 975

Colour code: 975
Colour: Taupe



Clay 988

Colour code: 988
Colour: Brown



Clay 989

Colour code: 989
Colour: Black