

The perfect finishing touch for any floor.







### The Perfect Finishing Touch for Any Floor











No floor is complete without the finishing touches. Whether you're choosing laminate, wood, carpet, or luxury vinyl flooring, Performance Accessories® products include everything you need for a perfect flooring installation. Professionally matched and precision crafted to coordinate with the colors, styles, and specifications of major flooring brands, our accessories take compatibility to the next level by meeting or exceeding the warranty standards of most leading hard surface flooring manufacturers.





### The Perfect Finishing Touch for Any Floor





## ADHESIVES & SUBFLOOR PREP FOR SUBFLOORS



### RealPrime™

#### **Acrylic Primer for Porous Substrates**

Performance Accessories RealPrime<sup>™</sup> is a one-part, water-dispersed, solvent-free, acrylic-based solution used to prime and seal floor surfaces prior to the application of Performance Accessories leveling products.



	SKU	Floori	ng Type	Application	RH/pH Limit		Cure Time	
Specialty Retail BMF Karastan Aladdin	PBNDR PBNDP PBNDK PBNDA	Cement 0	icrete t Screeds SB wood	Stiff Bristle Push Broom	99%/12	30 Min (ex	in (concrete and mortar with 1:3 dilution) ttremely porous concrete with 1:3, 1:1 dilution) 2 hours (OSB/plywood, undiluted) (cementitious over gypsum with 1:1 dilution)	
		Traffic	Depth Range	Substrate PSI	IIC Sound Rating		Spread Rate: Thickness	
		N/A	N/A	N/A	N/A		Undiluted: 500 Sq Ft (46.5 m²) Diluted (1:3): 600–1,000 Sq Ft (55.7–92.9 m²)	



### MasterPatch™

#### **Subfloor Patching Agent**

Performance Accessories MasterPatch™ is a fast-drying, self-curing, polymer-modified, cement-based patching compound that rapidly develops high compressive strength. Use for smoothing, leveling, patching, and filling cracks, holes, and voids in concrete and approved wood underlayments prior to the installation of floor coverings.

	SKU	F	Flooring Type		Application	RH/pH Limit	Cure Time	
Specialty Retail BMF Karastan Aladdin	MPCHP MPCHK		and Plywood Substrates ated Gypsum-Based Subfloor		Flat-Edged Trowel	98%/5-9	30-60 Min	
		Traffic	Depth Range	Sul	bstrate PSI	IIC Sound Rating	Spread Rate: Thickness	
	·	30-60 Min	1/16"-1/2"	Compressive Strength: 2,000 psi		N/A	25-30 Sq Ft (1/8" thickness 12.5-15 Sq Ft (1/4" thicknes	/

## ADHESIVES & SUBFLOOR PREP FOR SUBFLOORS





### UltraSmooth™

### **Subfloor Leveling Agent**

Performance Accessories UltraSmooth<sup>™</sup> Leveler is a one-component, durable, and versatile cementitious underlayment for interior and exterior concrete and cementitious substrates. It can be applied manually or by pump to produce a self-smoothing, rapid-setting, and flat substrate prior to the application of a final floor finish. Typical application thickness is 1/8" up to 3" (3 mm up to 76 mm).

#### Sustainability for UltraSmooth™

LEED v4 and v4.1 Compliant

	SKU		Flooring Type	Application	RH/pH L	imit Cure Time
Karastan	USTHP	Concrete and Cementitious Substrates RealPrime-Treated Gypsum-Based Subfloor		Flat-Edged Trowel, Piston Pur Rotor-Stator, or Underlayment-Type	e Pump	
		Traffic	Depth Range	Substrate PSI	IIC Sound Rating	Spread Rate: Thickness
		4 Hours	Neat: 1/8"-3" Extended: 1/4"-4"	Compressive Strength: 5,300 psi	N/A	26 Sq Ft (1/4" thickness)



### **ADHESIVES & SUBFLOOR PREP MULTIPURPOSE**





### M700 Plus

#### Pressure-Sensitive, Low-Odor Acrylic Multipurpose Adhesive

M700 Plus is a pressure-sensitive acrylic adhesive with high-strength, high-tack adhesion for LVT, sheet vinyl, and both PVC-backed and non-PVC-backed carpet tiles over porous and nonporous substrates. With fast dry time, extended open time, and low odor, it ensures easy application and strong moisture resistance for high-traffic environments like hospitals, schools, and offices..

#### **Indoor Air Quality**

CRI GLP Approved 
FloorScore Certified 
MicroSept® Antimicrobial



	SKU	Flooring Type		Trowel Size	RH/pH Limit	Open Time	Working Time
Specialty Retail BMF Aladdin	M700P P700P A700P	Non-PVC-Backed Carpet Tile Sheet Vinyl LVT/LVP		1/16" x 1/32" x 1/32" U-Notch	99%/12 95%/10 95% RH	10-30 Min	8 Hours
		Traffic Rolling Load		Heat Weld	IIC Sound Rating		Spread Rate
		Immediate	72 Hours	N/A 2 Hours N/A	N/A	:	200-260 Sq Ft/Gal



### **ADHESIVES & SUBFLOOR PREP** FOR VINYL



### Total Bond®

### Single-Part, Moisture-Curing Wet-Set Adhesive for High-Moisture Environments

Engineered for heavy rolling loads and high-moisture conditions, Total Bond® forms an unlimited moisture vapor barrier, providing moisture protection up to 100% RH. Its fast cure time and strong bond strength make it an installation-friendly alternative to two-part epoxy systems, ensuring long-term durability in demanding environments.



#### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified

SKU	Flooring Type		Trowel Size	RH/pH Limit	Open Time	Working Time
M100R M100P M100A	Sheet Vinyl LVP, LVT, SVT, VCT, VET Rubber		/16" x 1/32" x 1/32" U-Notch 16" x 1/16" x 1/16" Sq Notch	100%	10-30 Min	45 Min
	Traffic	Rolling Load	Heat Weld	IIC Sound Ra	ating	Spread Rate
	Immediate Immediate 24 Hours	8 Hours 8 Hours N/A	2 Hours N/A N/A	N/A		180–250 Sq Ft/Gal 180–250 Sq Ft/Gal 75–125 Sq Ft/Gal



### **M99**

#### Resilient Flooring Adhesive for High-Moisture Environments

M99 is a high-tack, moisture-resistant adhesive built for demanding installations. With strong bond strength and moisture protection up to 99% RH, it delivers secure, long-lasting performance in commercial and high-traffic spaces. Its low odor and fast drying time allow for immediate occupancy, making installation more efficient.

#### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified

SKU	SKU Flooring Type		Trowel Size		Open Time	Working Time
Specialty Retail M99 BMF M99P Aladdin M99A	Sheet Vinyl LVT/LVP Rubber Treads & Risers	1/16" x 1	1/16" x 1/32" x 1/32" U-Notch 1/16" x 1/16" x 1/16" Sq Notch		10-20 Min 10-20 Min 20-30 Min	4 Hours
	Traffic	Rolling Load	Heat Weld	IIC Sour	nd Rating	Spread Rate
	Immediate Immediate 24 Hours	72 Hours 72 Hours N/A	2 Hours N/A N/A	N	/A	220-260 Sq Ft/Gal



### **ADHESIVES & SUBFLOOR PREP** FOR VINYL



### MS160

#### Spray Adhesive for Resilient Flooring

MS160 is a fast-drying, high-tack aerosol adhesive that provides quicker, easier installation than traditional adhesives. Its compact spray-can format allows for precise, low-mess application, making it ideal for quick-turn projects and occupied spaces. With moisture resistance up to 95% RH, its aggressive grab and shear strength ensure secure bonding in commercial environments..

#### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified MicroSept® Antimicrobial



	SKU	Flooring Type	Trowel	Size	RH/pH Limit	Open Time	Working Time
Specialty Retail BMF Aladdin	MS16R MS16P MS16A	Sheet Vinyl LVT/LVP	Correct Pattern		95%/12	10-30 Min	4 Hours
		Traffic	Rolling Load	Heat Weld	IIC	Sound Rating	Spread Rate
		Immediate	Immediate	Immediate N/A		N/A	140-160 Sq Ft/Can



### M95

### High-Strength Acrylic Adhesive for Resilient Flooring

M95 is a low-odor, solvent-free acrylic adhesive designed for resilient sheet, tile, and plank installations over porous and non-porous substrates. Ideal for use in occupied spaces, with acclimation required prior to installation. With moisture resistance up to 95% RH, it delivers strong, durable bonding for commercial and residential applications.

#### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified

SKU	Flooring Type	Trowel Size	RH/pH Limit	Open Time	Working Time
Specialty Retail M95R BMF M95P Aladdin M95A	Sheet Vinyl LVT/LVP	1/16" x 1/32" x 1/32" U-Notch	95%/10	10-30 Min	1 Hour
	Traffic	Rolling Load	Heat Weld	IIC Sound Rating	Spread Rate
	24 Hours	72 Hours	2 Hours N/A	N/A	220-260 Sq Ft/Gal



### **ADHESIVES & SUBFLOOR PREP** FOR VINYL



### V-ONE®

### Pressure-Sensitive Adhesive for Resilient Flooring

V-ONE® is a clear-set, solvent-free pressure-sensitive adhesive designed for LVT, LVP, and sheet vinyl over porous and non-porous substrates. With moisture resistance up to 99% RH and extended working time, it allows for flexible installations with strong initial tack for secure bonding.

#### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified

	SKU	Flooring Type	Trowel Size		RH/pH Limit	Open Time	Working Time
Specialty Retail BMF Karastan Aladdin	PVONE KVONE	Sheet Vinyl LVT/LVP	3/8" Nap Roller 1/16" x 1/32" x 1/32" U-Notch		95%/12 99%/12	30-60 Min 15-60 Min	24 Hours
		Traffic	Rolling Load	Heat Weld	IIC S	Sound Rating	Spread Rate
		24 Hours	N/A	N/A		N/A	350 Sq Ft/Gal 250 Sq Ft/Gal



### M640

#### Residential Pressure-Sensitive Adhesive for Luxury Vinyl Flooring

M640 is a low-odor, solvent-free acrylic adhesive designed for residential LVT and LVP installations. With strong initial tack and moisture resistance up to 90% RH, it ensures a secure bond in residential applications.

#### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified

MicroSept® Antimicrobial Certified

	SKU	Flooring Type	Trowel	Trowel Size		Open Time	Working Time
Specialty Retail BMF Karastan Aladdin	VA65R VA65P VA65K VA65A	Sheet Vinyl LVT/LVP	3/8" Nap Roller 1/16" x 1/32" x 1/32" U-Notch		90%/12	30-60 Min 15-60 Min	24 Hours
		Traffic	Rolling Load	Heat Weld	IIC :	Sound Rating	Spread Rate
		24 Hours	N/A	N/A		N/A	350 Sq Ft/Gal 250 Sq Ft/Gal



## ADHESIVES & SUBFLOOR PREP FOR VINYL & WOOD



### ExpressLok™

#### High-Strength, Hard-Set Adhesive for Resilient Flooring

ExpressLok<sup>™</sup> delivers fast, secure installations with a rapid flashing time and aggressive bond strength. Designed for LVT/LVP and sheet vinyl, it ensures strong adhesion in high-moisture conditions and features color-changing technology for precise application.



#### **Indoor Air Quality**

CRI GLP Approved 
FloorScore Certified

	SKU	Flooring	Туре	Trowel Size	RH/pH Limit	Open Time	Working Time
Specialty Retail BMF Karastan Aladdin	EXLKR EXLKP EXLKK EXLKA	Sheet V Flexible LV	*	1/16" x 1/16" x 1/16" Square Notch	<95%/7-10	25 Min	Varies based on ambient conditions and substrate porosity
		Traffic	Rolling Load	Heat Weld	IIC Sound Rating		Spread Rate
		Light – 24 Hours Heavy – 48 Hours		N/A	N/A		180 Sq Ft/Gal



### **M92X™**

#### Moisture-Curing Urethane Adhesive for Wood Flooring

M92X<sup>™</sup> is a moisture-curing urethane adhesive designed for wood flooring installations. It provides superior bond strength and moisture protection up to 90% RH, with accelerated curing in high-humidity environments. M92X<sup>™</sup> is suitable for a variety of properly prepared substrates, ensuring long-term durability and easy trowel application.

### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified

SKU		Floor	ing Type		Trowel Size	RH/pH Limit	
Specialty Retail M92X BMF P92X Karastan K92X Aladdin A92X	5 1	up to 3/8" thick & Eng Dryback Wood	to 3/8" thick & Engineered Flooring greater than 9/16" thick p to 3/8" thick & Engineered Flooring less than 9/16" thick Dryback Wood Parquet Flooring Solid & Engineered Flooring		1/4 1/8" x 1	x 15/32" V-Notch " x 1/4" V-Notch 1/8" x 1/8" Sq Notch 1/4" x 5/16" V-Notch	90% 90% N/A N/A
	Open Time	Working Time	Traffic	Rolling Load	Heat Weld	IIC Sound Rating	Spread Rate
	N/A	50-70 Min	24 Hours	N/A	N/A	N/A	20 Sq Ft/Gal 30 Sq Ft/Gal 60-70 Sq Ft/Gal 50-60 Sq Ft/Gal



## ADHESIVES & SUBFLOOR PREP FOR WOOD



### TimberStrong™

CRI GLP Approved FloorScore Certified

#### Moisture-Curing Urethane Adhesive for Engineered Wood

TimberStrong" is a moisture-cured urethane adhesive designed for engineered hardwood flooring installations. It provides strong bond strength and moisture protection up to 99% RH, making it ideal for use in high-humidity environments where accelerated curing is beneficial. TimberStrong" is suitable for use over a variety of properly prepared substrates, ensuring long-term durability.

# use over a variety of properly prepared substrates, ensuring long-term durabil



	SKU	Flooring Type	ng Type	Trowel Size	RH/pH Limit	Open Time	Working Time
Specialty Retail TMBDR BMF TMBDP		Engineered Hardwood Flooring > 5/8" thick or Plywood		1/2" x 15/32" V-Notch or 1/4" x 3/8" x 1/4" Sq Notch	99% or 99%		
Karastan Aladdin	TMBDK TMBDA	Engineered Hardwood Flooring <1/2" thic Engineered Hardwood Flooring <1/2" thic or Plywood >1/2" thick		3/16" x 5/32" V-Notch 1/4" x 1/4" x 1/8" Sq Notch 1/4" x 1/4" x 1/4" Sq Notch	N/A N/A N/A	N/A	50-120 Min
		Traffic	Rolling Load	Heat Weld	IIC Sound Rating	:	Spread Rate
		24 Hours	N/A	N/A	N/A	:	20 Sq Ft/Gal 20 Sq Ft/Gal 50 Sq Ft/Gal 40 Sq Ft/Gal 35 Sq Ft/Gal



### Silent Bond™

#### Sound-Dampening, Moisture-Resistant Wood Flooring Adhesive

Exclusive to Performance Accessories, Silent Bond" is a one-component, hybrid polymer adhesive that also serves as a sound-dampening moisture vapor barrier, enhancing IIC ratings. It eliminates the need for preinstallation moisture testing for engineered wood and bridges static cracks, delivering superior adhesion with easy trowel application.

#### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified

	SKU		Flooring Type		Trowe	el Size	RH/pH Limit	Open Time
BMF F	PA22 PPA22 <pa22< th=""><th>Solid W Engineered Pla Engineered Plank</th><th>ood Plank, Shorts, nk or Bamboo &gt; 1/</th><th>'2" or wider than 7" and less than 7" wide</th><th colspan="2">1/4" x 1/4" V-Notch 1/4" x 1/4" x 1/4" Sq Notch 3/16" x 3/16" x 3/16" Sq Notch 1/4" x 1/2" x 3/16" V-Notch 1/8" x 1/8" x 1/8" Sq Notch</th><th>99% 75% 75% 75% 75%</th><th>N/A</th></pa22<>	Solid W Engineered Pla Engineered Plank	ood Plank, Shorts, nk or Bamboo > 1/	'2" or wider than 7" and less than 7" wide	1/4" x 1/4" V-Notch 1/4" x 1/4" x 1/4" Sq Notch 3/16" x 3/16" x 3/16" Sq Notch 1/4" x 1/2" x 3/16" V-Notch 1/8" x 1/8" x 1/8" Sq Notch		99% 75% 75% 75% 75%	N/A
		Working Time	Traffic	Rolling Load	Heat Weld	IIC Sound Rating	g §	Spread Rate
		50-70 Min	24 Hours	N/A	N/A	50 IIC N/A N/A N/A	25· 35· 60·	-35 Sq Ft/Gal -30 Sq Ft/Gal -45 Sq Ft/Gal -75 Sq Ft/Gal



## **ADHESIVES & SUBFLOOR PREP** FOR CARPET



### NuBroadlok® Seam Sealer

#### Solvent-Free Carpet Seam Sealer

NuBroadlok® Solvent-Free Carpet Seam Sealer is recommended for seaming polypropylene, jute, urethane, latex unitary carpet and woven-backed and vinyl-backed edges. It prevents unraveling and/or delaminating of carpet backings and yarns. NuBroadlok Solvent Free Carpet Seam Sealer can be used for direct stick and conventional stretch-in installations and is resistant to mildew, fungus, and professional carpet cleaning.



#### **Indoor Air Quality**

CRI GLP Approved

	SKU	Floorin	ng Type	Trowel Size	RH/pH Limit	0	pen Time
Karastan	R267P	Polypropylene, Jute, Urethane, Latex Unitary, Woven-Backed, Vinyl-Backed Carpets Working Time Traffic		N/A	N/A	Must be we	the touch (stretch-in) et for seam closure ct glue-down)
Alddill	NZ07A			Rolling Load	Heat Weld	IIC Sound Rating	Spread Rate
		N/A	N/A	N/A	N/A	N/A	8 ounces covers approx.



### NuBroadlok® Edge Sealer

### Latex Carpet Edge Sealer

NuBroadlok® Latex Carpet Edge Sealer is a natural latex adhesive designed for sealing raw carpet edges, replacing damaged or burned nap, strengthening worn backings, and joining padding. NuBroadlok Edge Sealer is extremely fast drying, easy spreading, and non-flammable. Bonding strength increases with age and will not deteriorate after shampooing.

### **Indoor Air Quality**


CRI GLP Approved

SKU		Floor	ing Type			Trowel Size RH,		
Specialty Retail R261 BMF P261 Karastan K261		Latex	ropylene, Jute, Unitary, cked Carpets			N/A	N/A	
	Open Time	Working Time	Traffic	Rolling Load	Heat Weld	IIC Sound Rating	Spread Rate	
<u>.</u>	Until dry to the touch before joining seam	50-70 Min	24 Hours	N/A	N/A	N/A	1 quart covers approx. 800 linear feet	



## ADHESIVES & SUBFLOOR PREP FOR CARPET



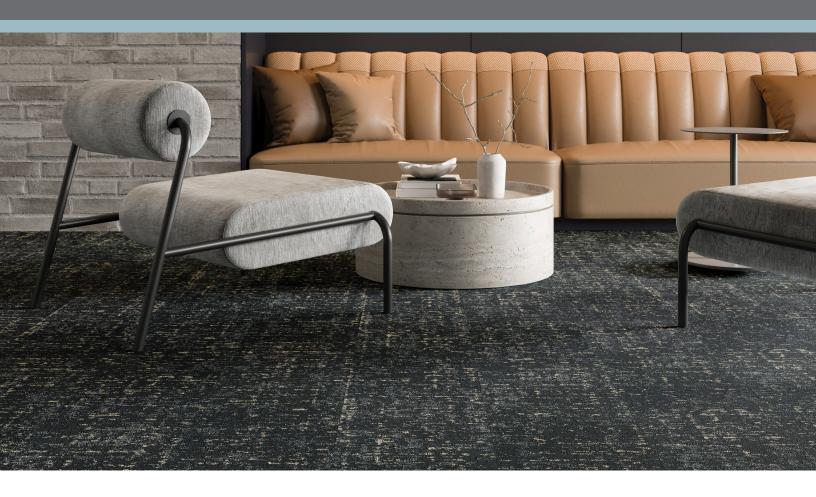



### NuBroadlok®

### Fast-Grabbing, High-Solids Carpet Adhesive

NuBroadlok® Premium Adhesive is a high-solids, commercial-grade adhesive designed for use with all broadloom carpets. Its low-odor, fast-grabbing formula provides quick tack, making it the ideal choice for heavy-duty installations and pattern carpet installations. The adhesive allows for adjustments during installation, ensuring precise pattern alignment while providing a secure bond. Not for use with PVC-backed floor coverings or carpet tiles.

### **Indoor Air Quality**

CRI GLP Approved / FloorScore Certified /

	SKU	Flo	poring Type	Tre	owel Size	RH/pH Limit	Open Time
Specialty Retail BMF Karastan Aladdin	XL05 R002P R002K R0020	Broa	dloom Carpet	1/8" x 1/8	8" x 1/8" U-Notch	80%/5-9	20-30 Min
		Working Time	Traffic	Rolling Load	Heat Weld	IIC Sound Rating	Spread Rate
		20-30 Min	24 Hours	N/A	N/A	N/A	6-10 Sq Yds/Gal



### **ADHESIVES & SUBFLOOR PREP FOR CARPET**



### NuBroadlok® VRT

#### Patented High-Solids Carpet Adhesive for High-Moisture Environments

NuBroadlok® VRT is a patented, commercial-grade, high-solids adhesive with vapor-release technology that allows moisture vapor to pass through while preventing topical moisture from penetrating the bond. It provides moisture protection up to 99% RH, ensuring a strong, secure bond. Solvent-free and low-odor, it's designed for interior and exterior installations.

### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified

#### For permanent installation of:

- · Rubber or urethane-backed artificial grass carpet
- · Outdoor unitary latex and marine-backed carpet
- Carpet with synthetic secondary backings
- Cork underlayment and flooring
- Commercial broadloom (except those with vinyl backing)



SKU	Flo	oring Type		Trowel Size	RH/pH Lir	mit Open Time
Specialty Retail XL09M BMF XL09P Aladdin XL09A	Broadloom, Wov	ven, and Outdoor Carpet		: 1/16" V-Notch (Patter 3/32" V-Notch (Non-Pa		. 10–20 Min
	Working Time	Traffic	Rolling Load	Heat Weld	IIC Sound Rating	Spread Rate
	10-20 Min	24 Hours	N/A	N/A	N/A	10−15 Sq Yds/Gal



14

### EnPress™

#### Pressure-Sensitive Adhesive for Carpet Tile

EnPress<sup>™</sup> is a high-performance pressure-sensitive adhesive designed for carpet tile. Featuring dual antimicrobial protection, it provides strong initial grab and moisture resistance up to 90% RH for concrete substrates. Low-VOC and low-odor, it is ideal for use in residential, commercial, and institutional environments. With up to 4 hours of working time, EnPress<sup>™</sup> ensures reliable, long-lasting performance.

#### **Indoor Air Quality**

CRI GLP Approved / FloorScore Certified / MicroSept® Antimicrobial

	SKU	Flooring Type	Tro	owel Size	RH/pH Limit	Open Time	Working Time
	Specialty Retail M004R BMF M004P Aladdin M004A	PET Cushion-Backed Tile Non-PVC Carpet Tile PVC-Backed Carpet Tile		2" x 1/32" U-Notch Nap Roller	99%/12 95%/12 45-60 Min 90%/8-10		4 Hours
		Traffic	Rolling Load	Heat Weld	IIC Sound	Rating	Spread Rate
1		Immediate	N/A	N/A	N/A	A	225–270 Sq Ft/Gal 315–360 Sq Ft/Gal 315–360 Sq Ft/Gal



### ADHESIVES & SUBFLOOR PREP

FOR TRIMS & STAIRS



### TreadBond™

#### Stair Tread Adhesive

TreadBond<sup>™</sup> is a moisture-curing, gun-grade adhesive designed for stair treads and noses. It provides a strong initial bond and fast curing, ensuring a secure, long-lasting bond for stair installations. Easy to apply, it is ideal for both residential and commercial applications.

#### **Indoor Air Quality**

CRI GLP Approved FloorScore Certified





This product pairs with all of our stair tread solutions to create the perfect finishing touch.

SKI	(U	Flooring Type	Trowel Size	RH/pH Limit	Open Time	Working Time
BMF TRI Karastan TRI	RDBR RDBP RDBK RDBA	Wood, HDF, Vinyl	N/A Rolling Load	N/A <b>Heat Weld</b>	N/A	15-30 Min Spread Rate
		Light Traffic — 12 Hours Heavy Traffic — 24 Hours	N/A	N/A	N/A	6 Treads



### M45

#### High-Grab Wall Base Adhesive

M45 is a solvent-free, low-odor acrylic adhesive designed for vinyl, rubber, and specialty wall base installations. With exceptional wet grab and fast-setting performance, it ensures tight corners and a durable, impact-resistant bond. Compatible with a variety of substrates, M45 provides strong adhesion and long-lasting performance for interior wall base installations.



This product pairs with our trim solutions to create the perfect finishing touch.

SKU	Flooring Type	Trowel Size		RH/pH Limit	Open Time	Working Time
Aladdin M45A	Cove Base	1/8" x 1/8" :	x 1/8" V-Notch or Applicator	N/A	N/A	20-30 Min
	Traffic	Rolling Load	Heat Weld	IIC Sound Rating		Spread Rate
	N/A	N/A	N/A	N/A	5	5-60 LF/Cartridge



## ADHESIVES & SUBFLOOR PREP TECHNICAL INFORMATION & COMPATIBILITY



	M99	M95	M700P	M640	ExpressLok	MS160	Total Bond (M100)	V-One	EnPress (M004)
Project Type	Commercial	Commercial	Commercial	Residential	Residential & Commercial	Commercial	Commercial	Residential	Commercial
Broadloom									
Carpet Tile			Х						Х
LVT	х	Х	х	х	Х	х	Х	х	
LVF				х	х			х	
Vinyl Sheet	х	Х	х	х	Х	х	х		
Engineered Wood									
Heavy Loads		Х	х		х		х		
Spread Rate: Sq Ft/Gal	220-260	220-260	220-260	220-260	180	140-160	200	250	315-360
RH	99%	95%	99%	90%	95%	95%	100%	99%	90%
Base Formula	Acrylic	Acrylic	Acrylic	Acrylic	Acrylic	Acrylic/Latex	Modified Silane	Acrylic/ Latex	Acrylic
Releasable	No	No	Yes	No	No	No	No	Yes	Yes
Location	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor
Rolling Loads	Yes	Yes	Yes	No	Yes	Yes	Yes	No	Yes


	M92X	Silent Bond	TimberStrong	NuBroadlok Prem. Multi.	NuBroadlok VRT	NuBroadlok Seam Sealer	NuBroadlok Edge Sealer
Project Type	Residential	Residential	Residential	Commercial	Commercial	Commercial	Commercial
Broadloom				Х	Х	X	Х
Carpet Tile							
LVT							
LVF							
Vinyl Sheet							
Engineered Wood	Х	Х	Х				
Heavy Loads							
Spread Rate: Sq Ft/Gal	50-60	35	20	20-28	32-60	100 LF/8 oz	100 LF/8 oz
RH	90%	99%	99%	80%	99%	N/A	N/A
Base Formula	MU	MS	MU	SBR Latex	SBR Latex	Latex	Latex
Releasable	No	No	No	No	No	No	No
Location	Indoor	Indoor	Indoor	Indoor	Indoor / Outdoor	Seams	Edge Seams
Rolling Loads	No	No	No	Yes	Yes	Yes	Yes



## UNDERLAYMENTS FOR VINYL



	<b>++++</b> Platinum™ (Laminate)	Platinum™ (Vinyl)	Gold	RealSound®	<b>++</b> MoistureGuard®	MoistureBarrier™ (Poly)
SKU	LU39	VU39	LU38	LU10A	LU8A	VU40
LAM/Wood/RPC	Х		X	Х	X	Х
LVT		Х				X
Sq Ft	100	100	100	100	100	100
Packaging	Ctn	Ctn	Ctn	Roll	Roll	Roll
IIC	71	72	69	72	68	N/A
STC	66	66	66	66	67	N/A
Thickness	3 mm	1.5 mm	2 mm	2 mm	3 mm	6 mil



### Platinum™ 1.5 mm

**High-Performing Underlayment** 

When you won't settle for anything but the best, Platinum<sup>™</sup> underlayment offers both exceptional sound performance and a high foam density, resulting in the unparalleled performance of the floor.

	SKU	In Wide/Pc	In Long/Pc	Thickness	IIC	STC	Overlapping Tape	Sq Ft	Core Material	Surface Materials
BMF	VU39P VU39K	48"	300"	1.5 mm	72	66	Yes	100 sq ft	Polypropylene Foam	Metalized PET



## UNDERLAYMENTS FOR VINYL



### **AccuSound**

#### **Premium Vinyl Underlayment**

The ultimate in double-glue-down applications or glue down with loose-lay floating LVT, AccuSound underlayment provides excellent sound reduction and moisture protection under luxury vinyl flooring. This underlayment is ideal for multilevel installations.



	SKU	In Wide/Pc	In Long/Pc	Thickness	IIC	STC	Overlapping Tape	Sq Ft	Core Material	Surface Materials
Specialty Retail BMF Aladdin	VU01P	40"	5"	1 mm	71	66	Yes	200 sq ft	Polypropylene Foam	Polypropylene Foam

### MoistureBarrier™

#### **Moisture Barrier Underlayment**

Setting the standard in basic moisture protection, MoistureBarrier<sup>™</sup> underlayment works with any floating flooring to keep the subfloor safe from moisture damage. This underlayment is odorless, nontoxic, and lays flat for easy installation.


		SKU	Length	Width	Thickness	IIC	STC	Overlapping Tape	Sq Ft	Core Material	Surface Materials
	Specialty Retail BMF Karastan Aladdin	VU40P VU40K	315.96"	45.96"	6 mil	N/A	N/A	Yes	100 sq ft	Polyethylene	Polyethylene
18	400 ft	VU41	315.96"	45.96"	6 mil	N/A	N/A	Yes	400 sq ft	Polyethylene	Polyethylene

<sup>\*</sup>For products 4.5 mm thickness and up.



## UNDERLAYMENTS FOR FLOATING HARDWOOD AND LAMINATE





### Platinum™ 3 mm

### **High-Performing Underlayment**

When you won't settle for anything but the best, Platinum" underlayment offers both exceptional sound performance and a high foam density, resulting in the unparalleled performance of the floor.

_		SKU	In Wide/Pc	In Long/Pc	Thickness	IIC	STC	Overlapping Tape	Sq Ft	Core Material	Surface Materials
	Specialty Retail BMF Karastan Aladdin	LU39P	48"	300"	3 mm	71	66	Yes	100 sq ft	Polypropylene Foam	Polypropylene Foam and a Foil Barrier

### Gold

#### **Premium-Performing Underlayment**

Saves time with convenient fan fold, grid pattern for cutting, and pretaped sides. This versatile product is ideal for condos, multifamily housing, and residential projects with laminate or engineered hardwood flooring. Acting as a protective buffer, the premium underlayment enhances floor longevity, minimizing damage from daily wear and tear. Thermal insulating properties provide warmth and comfort underfoot for cozy living. Gold underlayment is made in the USA and includes a limited lifetime warranty.



	SKU	Length	Width	Thickness	IIC	STC	Overlapping Tape	Sq Ft	Core Material	Surface Materials
Specialty Retail	LU38									
BMF	LU38P	0.01	401	0	60			100 (1	D	Polypropylene Foam
Karastan	LU38K	30'	40"	2 mm	69	66	Yes	100 sq ft	Polypropylene Foam	and a Foil Barrier
Aladdin	LU38A									

## UNDERLAYMENTS FOR FLOATING HARDWOOD AND LAMINATE





### RealSound®

### **Sound-Reducing Underlayment**

RealSound® underlayment is the only truly patented underlayment system on the market. Its pre-attached moisture barrier helps protect floors from moisture damage and reduce hollow sounds. The optimal balance of price and sound quality, this product is mold and mildew resistant and safe for underfloor heating.

	SKU	Length	Width	Thickness	IIC	STC	Overlapping Tape	Sq Ft	Core Material	Surface Materials
Specialty Retail BMF Karastan Aladdin	LU10P LU10K	30'	40"	2 mm	72	66	Yes	100 sq ft	Polypropylene Foam	Polypropylene Foam

### MoistureGuard®

#### **Premium Moisture Guard Underlayment**

The standard in sound and moisture protection, MoistureGuard® underlayment provides quality moisture protection while offering basic sound performance. Its pre-attached moisture barrier helps protect floors from moisture damage. This product is self-leveling, recyclable, odorless, mold resistant, and safe for underfloor heating.



	SKU	Length	Width	Thickness	IIC	STC	Overlapping Tape	Sq Ft	Core Material	Surface Materials
Specialty Retail	LU8A									
BMF	LU8AP	30'	40"	3 mm	68	67	Yes	100 sa ft	Polypropylene Foam	Polypropylene Foam
Karastan	LU8AK	30	40	3 111111	00	07	163	100 34 11	r dispropsiene i dani	r dispropsiene i dani
Aladdin	A1110 A									

## UNDERLAYMENTS FOR FLOATING HARDWOOD AND LAMINATE



### MoistureBarrier™

#### **Moisture Barrier Underlayment**

Setting the standard in basic moisture protection, MoistureBarrier<sup>™</sup> underlayment works with any floating flooring to keep the subfloor safe from moisture damage. This underlayment is odorless, nontoxic, and lays flat for easy installation.







### **CLEANERS & TOOLS**



### PerimeterSeal™

#### Floor Perimeter Waterproofing Technology

This easy-to-use tape covers the expansion gap with a water-tight seal, protecting the flooring and the subfloor. PerimeterSeal™ allows flooring to freely expand and contract while ensuring any waterproof warranty extends to the perimeter of the floor.

- · Seals overlaps, transitions, and more.
- Easy and quick installation with no mess.
- · Seals the perimeter for all floating floors.
- · Can be used behind baseboards or quarter round.



SI	KU	Coverage	Unit Weight
Specialty Retail PS BMF PS Karastan PS Aladdin PS	PSTPP PSTPK	100 LF	7.5 oz



### **ScentStop™**

#### **Bio-Enzymatic Odor Neutralizer**

Bioengineered with beneficial bacteria and enzymes, ScentStop $^{\text{\tiny{M}}}$  neutralizes the source of household odors so they won't resurface.

#### **Any Household Odors**

- Pet accidents
- Mold and Mildew Odors
- Food spills
- Leaky appliances

#### **Any Surface**

- Upholstery
- Walls (Watersafe surfaces. Test in an inconspicuous area)
- Baseboards
- Tackstrips
- Flooring
- Grout lines
- · Wood and concrete subfloors

	SKU	Size	Case/Pack	Unit Weight
Specialty Retail	RSTOP	Gallon	4	9 lbs
BMF	SSTOP	32 oz Spray	12	2.25 lbs
Karastan	KSTOP			
Aladdin	ASTOP			



### **TRIMS & TRANSITIONS**





### Flooring Meets Its Match

Small details make all the difference. Performance Accessories trims and transitions are precision crafted and color matched to elevate the beauty of every space.

#### **Trims**

No room is complete without our color-coordinated quarter round and universal wall base. These moldings provide the perfect finishing touches for any wood, laminate, or vinyl floor.

#### **Transitions**

Color coordinated and engineered to fit right the first time, our multifunctional transitions simplify any flooring installation. Our 5-in-1 Transition acts as a T-molding, hard surface reducer, end molding, carpet reducer, and stair nose. Our 4-in-1 Transition acts as a T-molding, hard surface reducer, end molding, and carpet reducer.

### **Easy To Install**

Want to see how easy it is to install your staircase trims and accessories?



## TRIMS & TRANSITIONS FOR VINYL



### 4-in-1 Multifunctional Transition

The 4-in-1 Transition is a versatile, multifunctional trim that combines four essential transition solutions into one product, designed to provide seamless transitions between different flooring types. This all-in-one solution offers maximum flexibility and clean, professional finishes for any space.



#### **T-Molding**

Transitions between flooring of equal heights and in doorways.





#### Hard Surface Reducer

Transitions between two floors of different heights.



#### **End Molding**

Finishes flooring where it meets sliding glass doors or vertical surfaces like a fireplace hearth.



#### **Carpet Reducer**

Provides a smooth transition between hard surface flooring and carpet.

Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Surface Materials
V4IN1	PV4N1	KV4N1	78.7"	1.96"	0.51"	PVC	Highly Wear-Resistant, Aluminum Oxide-Coated PVC
			-				



## TRIMS & TRANSITIONS FOR LAMINATE



### 5-in-1 Multifunctional Transition

The 5-in-1 Transition is a versatile, multifunctional trim that combines five essential transition solutions into one product designed to provide seamless transitions between different flooring types. This all-in-one solution offers maximum flexibility and clean, professional finishes for any space.



### **T-Molding**

Transitions between flooring of equal heights and in doorways.





#### **Hard Surface Reducer**

Transitions bewteen two floors of different heights.



#### **End Molding**

Finishes flooring where it meets sliding glass doors or vertical surfaces like a fireplace hearth.



#### **Carpet Reducer**

Provides a smooth transition between hard surface flooring and carpet.



#### Stair Nose

Finishes stairs or step-down areas when used with the 5BASE metal track. (Sold Separately.)

Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Surface Materials	
MINC5	PINC5	KINC5	84.6"	1.87"	0.51"	MDF	Highly Wear-Resistant, Aluminum Oxide-Coated PVC	



## TRIMS & TRANSITIONS FOR HARDWOOD



### **T-Molding**

The T-molding can be used to transition between floors of equal height, concealing cut ends and providing a beautiful finish in doorways and transition areas.

These durable, prefinished moldings coordinate beautifully in design and texture with floors, no painting or staining required.



Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Surface Materials
HTMDA	PTMDA	KTMDA	84"	2"	0.56"	Solid Wood	Highly Wear-Resistant UV Coating



### Reducer

The reducer can be used for a smooth transition between floors of uneven heights, like wood floors to vinyl.

These durable, prefinished moldings coordinate beautifully in design and texture with floors, no painting or staining required.

	Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Surface Materials
	HREDC	PREDC	KREDC	84"	1.56"	3/8"	Solid Wood	Highly Wear-Resistant UV Coating
	HREDD	PREDD	KREDD	84"	1.56"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating
	HREDE	PREDE	KREDE	84"	1.56"	9/16"	Solid Wood	Highly Wear-Resistant UV Coating
	HREDF	PREDF	KREDF	84"	1.56"	3/4"	Solid Wood	Highly Wear-Resistant UV Coating
6	HREDG	PREDG	PREDG	84"	1.56"	5/8"	Solid Wood	Highly Wear-Resistant UV Coating

## TRIMS & TRANSITIONS FOR HARDWOOD



## Baby Threshold / End Molding

The baby threshold can be used to transition at doorways, sliding doors, and fireplaces. Additionally, this molding can be used to transition between hard surface floors and carpet.

These durable, prefinished moldings coordinate beautifully in design and texture with floors, no painting or staining required.



Specialty Retail SKU	BMF SKU	Karastan SKU	Length Width Height		Core Material	Surface Materials	
HENDD	PENDD	KENDD	84"	2"	3/8"	Solid Wood	Highly Wear-Resistant UV Coating
HENDE	PENDE	KENDE	84"	2"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating






## TRIMS AND TRANSITIONS FOR HARDWOOD, VINYL, OR LAMINATE



### Wall Base (Available in white only)

Wall Base moldings offer an easy solution to cover the expansion space required when installing floating floors. Simply place on top of your flooring along the wall or wall base and screw or nail into place in accordance with instructions for a secure and long-lasting installation. Pair with quarter round in a coordinating design for a beautifully finished look.



Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Surface Materials
RMBSP	PMBSP	KMBSP	94.5"	0.625"	3.36"	MDF	Highly Wear-Resistant, Aluminum Oxide-Coated Laminate



### **Quarter Round**

#### Hardwood and Laminated Wood

Quarter round offers an easy solution to cover the expansion space between flooring and a vertical structure or wall. Simply place on top of your flooring along the wall or wall base and nail into place in accordance with instructions for a secure and long-lasting installation.

These durable, prefinished moldings coordinate beautifully in design and texture with floors, no painting or staining required.

#### **Vinyl** (Available in white only)

Moisture-resistant, vinyl quarter round offers an easy solution to cover the expansion space required when installing floating floors. Simply place on top of your flooring along the wall or wall base and nail into place in accordance with instructions for a secure and long-lasting installation.

	Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Use	Surface Materials
	HQRTA	PQRTA	KQRTA	94.5"	0.62"	0.75"	MDF	Hardwood Floors	Highly Wear-Resistant, Aluminum Oxide-Coated Laminate
	RMQND	PQND	KMQND	94.5"	0.62"	0.75"	MDF	Laminated Wood Floors	Highly Wear-Resistant, Aluminum Oxide-Coated Laminate
28	VQND-WHITE	PVQND-WHITE	KVQND-WHITE	94.5"	0.62"	0.75"	PVC	Vinyl Floors	Highly Wear-Resistant, Aluminum Oxide-Coated PVC



### **SPECIAL ORDER TRIMS**

FOR HARDWOOD



Available in select TecWood™ and Karastan BelleLuxe® Natural styles only.



### **Vents**

Designed to complement the color and grain patterns of select engineered flooring collections, these durable, prefinished vent covers create a cohesive look throughout any space. Easy to install, they require no painting or staining and are available to coordinate beautifully in both design and texture with your floors.

Specialty Retail SKU	Karastan SKU	Frame Length	Frame Width	Box Length	Box Width	Height	Core Material	Surface Materials
HVNTA	KVNTA	12.5"	5"	10"	2.37"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating
HVNTB	KVNTB	14.5"	5"	12"	2.37"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating
HVNTC	KVNTC	12.5"	6.75"	10"	4"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating
HVNTD	KVNTD	14.5"	6.75"	12"	4"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating





### STAIR SOLUTIONS





### **Elevate Your Surroundings**

Carry the lifelong beauty of your floors onto your stairs with Flush Stair Noses with TrueMatch™, Full Stair Treads, and Stair Noses for the perfect fit, color, and warranty compatibility.

#### Flush Stair Nose with True Motch

The TrueMatch Flush Stair Nose offers a perfect match in color, pattern, and features like embossed-in-register texture. These nosings provide a smooth, flush transition between the stair nose and flooring plank for a more flawless appearance. The TrueMatch Flush Stair Nose also preserves the integrity of the Uniclic locking system, ensuring the flooring retains any waterproof warranties, even with the addition of the nosing.

#### **Full Stair Tread**

Completely cover your stair step with a visually appealing and practical solution, instantly elevating the overall look of your staircase.

#### Flush Stair Nose

Achieve a seamless and sophisticated look for your staircase with a smooth finish at the stair edge where the tread meets the riser. This product leaves a flush surface where the stair nose and flooring connect, elevating the overall aesthetic.

#### **Overlap Stair Nose**

The perfect solution for the top step of your staircase, this product adds a stylish touch by overlapping the flooring on the back end for an attractive raised nosing appearance.

### **Easy To Install**

Want to see how easy it is to install your staircase trims and accessories?






## STAIR SOLUTIONS FOR VINYL



### TrueMatch™ Flush Stair Nose

The vinyl flush stair nose with TrueMatch technology offers a perfect match in color, pattern, and features like embossed-in-register texture. These nosings provide a smooth, flush transition between the stair nose and flooring plank for a more flawless appearance. The TrueMatch flush stair nose also preserves the integrity of the Uniclic® locking system, ensuring the flooring retains any waterproof warranties, even with the addition of the nosing.





TreadBond\* adhesive makes installation simple — designed to work with all Performance Accessories\* Stair Solutions.

### **Irue Match**

Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Nosing Height	Core Material	Surface Materials
VSCAP	PVCAP	KVCAP	4" Less than flooring plank	3.5" Less than flooring plank	2.37"	Flooring Plank	Flooring Plank



### **Vinyl Stair Tread**

Designed to match the color and grain pattern of any resilient / vinyl flooring, the full stair tread can be placed directly over existing stair treads for easy installation and comes with a return that can be placed on either side of the tread for a perfectly finished look.

Treads and returns sold together. Risers sold separately.






TreadBond® adhesive makes installation simple—designed to work with all Performance Accessories® Stair Solutions.

Specialty Retail SKU	BMF SKU	Karastan SKU	Profile Name	Quantity	Length	Width	Height	Surface Material
RVTRD	PVTRD	KVTRD	Stair Tread	2	48"	12.25"	1.75"	Mixed Material
RISR	PRISR	KRISR	Riser	8	48"	0.5"	7"	Mixed Material



## STAIR SOLUTIONS FOR VINYL



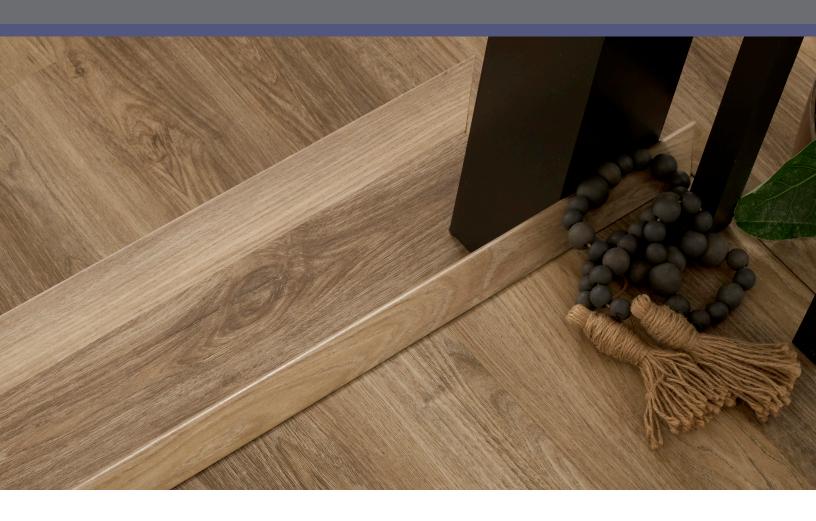

## **Overlap Stair Nose**

The vinyl stair nose provides a finished edge to coordinate with floor coverings on your staircase. The molding is designed with durability to handle the routine foot traffic along the edge of your stairs. This water-resistant molding can be installed along stairs in any room. The profile is user-friendly and easy to install.

These prefinished moldings coordinate beautifully in design and texture with floors, no painting or staining required.





TreadBond" adhesive makes installation simple — designed to work with all Performance Accessories® Stair Solutions.

Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Surface Materials
RVSNP	PVSNP	KVSNP	78.75"	1.88"	1.33"	PVC	Highly Wear-Resistant, Aluminum Oxide-Coated PVC

## STAIR SOLUTIONS FOR LAMINATE



### TrueMatch™ Flush Stair Nose

The laminate flush stair nose with TrueMatch technology offers a perfect match in color, pattern, and features like embossed-in-register texture. These nosings provide a smooth, flush transition between the stair nose and flooring plank for a more flawless appearance. The TrueMatch flush stair nose also preserves the integrity of the Uniclic® locking system, ensuring the flooring retains any waterproof warranties, even with the addition of the nosing.





TreadBond" adhesive makes installation simple — designed to work with all Performance Accessories® Stair Solutions.

### **True Match**

Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Nosing Height	Core Material	Surface Materials
TMSN	TMSP	TMSK	3" Less than flooring plank	1.2" Less than flooring plank	1.25"	Flooring Plank	Flooring Plank
							33



## STAIR SOLUTIONS FOR LAMINATE



### **Full Laminate Stair Tread**

When you purchase new floors, it's easy to find and order stair treads that match. Our full stair treads perfectly complement any laminated wood flooring and are designed to be placed over any stairs for fast and easy installation.

Treads, risers, and returns sold separately.





TreadBond" adhesive makes installation simple — designed to work with all Performance Accessories® Stair Solutions.



Specialty Retail SKU	BMF SKU	Profile Name	Quantity	Length	Width	Height	Surface Materials
RSTRD	PSTRD	Stair Tread	1	48.5"	12.26"	1.64"	Mixed Material
RISR	PRISR	Riser	8	48"	0.5"	7"	Mixed Material
SRTN	PSRTN	Return	4	15.5"	.091"	1.71"	Mixed Material



### Laminate Flush Stair Nose

Achieve a seamless and sophisticated look for your staircase with a smooth finish at the stair edge where the tread meets the riser. This stair nose connects directly to the laminate flooring with no overlap, leaving a flush surface and elevating the overall aesthetic.



TreadBond" adhesive makes installation simple — designed to work with all Performance Accessories® Stair Solutions.

	Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Surface Material
	MFSNA	MFSPA	MFSKA	96"	4.3"	8 mm	Mixed Material
	MFSNB	MFSPB	MFSKB	96"	4.3"	10 mm	Mixed Material
34	MFSNC	MFSPC	MFSKC	96"	4.3"	12 mm	Mixed Material



## STAIR SOLUTIONS FOR LAMINATE



### **Overlap Stair Nose**

Get the same beautiful flooring throughout your home when you finish your project with a coordinated staircase. This overlap stair nose allows a smooth and secure finish when flooring planks are installed on stair treads. The durable decor is designed to handle everyday foot traffic on the edge of stairs, and the overlap design allows floors to float in necessary applications.

These durable, prefinished moldings coordinate beautifully in design and texture with floors, no painting or staining required.





TreadBond" adhesive makes installation simple — designed to work with all Performance Accessories® Stair Solutions.

Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Surface Materials
RMSNP	PSNP	KMSNP	78.7"	2.36"	0.75"	MDF	Highly Wear-Resistant, Aluminum Oxide-Coated PVC



### 5-in-1 Stair Nose

For a beautiful finished look, the 5-in-1 multifunctional molding can be used as a stair nose, coordinating with the laminate planks that cover your steps. Simply install this aluminum stair nose track and click the molding into place for a secure fit. The stair nose track comes with a 2 mm shim that raises the plank to the appropriate height of the stair nose molding.



TreadBond" adhesive makes installation simple — designed to work with all Performance Accessories® Stair Solutions.

Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material
MINC5	PINC5	KINC5	84.6"	1.87"	0.51"	MDF
5BASE	P5BAS	KBASE	84.6"	2.79"	0.83"	Aluminum

## STAIR SOLUTIONS FOR HARDWOOD



### Flush Stair Nose

Get the same beautiful look throughout your home when you finish your project with coordinated moldings. The stair nose puts an attractive finish on stairs by integrating exposed floor edges to create a seamless level transition to the floor on every step.

These durable, prefinished moldings coordinate beautifully in design and texture with floors, no painting or staining required.



Specialty Retail SKU	BMF SKU	Karastan SKU	Length	Width	Height	Core Material	Surface Materials
HFSTC	PFSTC	KFSTC	84"	3"	3/8"	Solid Wood	Highly Wear-Resistant UV Coating
HFSTD	PFSTD	KFSTD	84"	3"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating
HFSTE	PFSTE	KFSTE	84"	3"	9/16"	Solid Wood	Highly Wear-Resistant UV Coating
HFSTF	PFSTF	KFSTF	84"	3"	3/4"	Solid Wood	Highly Wear-Resistant UV Coating
HFSTG	PFSTG	KFSTG	84"	3"	5/8"	Solid Wood	Highly Wear-Resistant UV Coating





### **SPECIAL ORDER STAIR SOLUTIONS**

FOR HARDWOOD



Available in select TecWood™ and Karastan BelleLuxe® Natural styles only.

### **Stair Treads**

Designed to complement the color and grain patterns of select engineered flooring collections, the Performance Accessories hardwood stair tread is available in multiple standard sizes, with or without returns, and comes in left, right, or double-return options.



Specialty Retail SKU	Karastan SKU	Return	Length	Width	Height	Core Material	Surface Materials
HTRDA	KTRDA	No Return	36"	11.5"	1"	Solid Wood	Highly Wear-Resistant UV Coating
HTRDB	KTRDB	Left Return	48"	11.5"	1"	Solid Wood	Highly Wear-Resistant UV Coating
HTRDC	KTRDC	Right Return	48"	11.5"	1"	Solid Wood	Highly Wear-Resistant UV Coating
HTRDD	KTRDD	No Return	48"	11.5"	1"	Solid Wood	Highly Wear-Resistant UV Coating
HTRDY	KTRDY	Double Return	48"	11.5"	1"	Solid Wood	Highly Wear-Resistant UV Coating
HTRDE	KTRDE	Left Return	60"	11.5"	1"	Solid Wood	Highly Wear-Resistant UV Coating
HTRDF	KTRDF	Right Return	60"	11.5"	1"	Solid Wood	Highly Wear-Resistant UV Coating
HTRDX	KTRDX	Double Return	60"	11.5"	1"	Solid Wood	Highly Wear-Resistant UV Coating

### Riser

Designed to complement the color and grain patterns of select engineered flooring collections, the Performance Accessories hardwood riser is available in multiple standard sizes.



Specialty Retail SKU	Karastan SKU	Length	Width	Thickness	Core Material	Surface Materials
HRISA	KRISA	32"	7.5"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating
HRISB	KRISB	48"	7.5"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating
HRISC	KRISC	60"	7.5"	1/2"	Solid Wood	Highly Wear-Resistant UV Coating



### **FLOORING ACCESSORIES**

### PRODUCT MATRIX

	Laminate	Vinyl	RPC	Wood	Carpet Tile	Broadloom
П	Flush Stair Nose	Flush Stair Nose True Match	Flush Stair Nose	Full Stair Tread		
5	Full Stair Tread	Full Stair Tread	Full Stair Tread	Flush Stair Nose		
STAIR	Flush Stair Nose	Overlap Stair Nose	Flush Stair Nose	Overlap Stair Nose		
SOLUTIONS	Overlap Stair Nose		Overlap Stair Nose			
-	5-in-1 Multifunctional Transition	4-in-1 Multifunctional Transition	5-in-1 Multifunctional Transition	T-Molding		
	Wall Base	Wall Base	Wall Base	Quarter Round		
	Quarter Round	Quarter Round	Quarter Round	Baby Threshold / End Molding		
TRIMS & TRANSITIONS	Stair Riser	Stair Riser	Stair Riser	Reducer		
				Wall Base		
	Platinum™	Platinum™	Platinum™			
	Gold	Gold	Gold			
1000	RealSound®	MoistureBarrier™	RealSound®			
UNDERLAYMENTS	MoistureGuard®		MoistureGuard®			
	MoistureBarrier™		MoistureBarrier™			
	Subfloor Prep					
	UltraSmooth™	UltraSmooth™	UltraSmooth™	UltraSmooth™	UltraSmooth™	UltraSmooth™
	MasterPatch™	MasterPatch™	MasterPatch™	MasterPatch™	MasterPatch™	MasterPatch™
	RealPrime™	RealPrime™	RealPrime™	RealPrime™	RealPrime™	RealPrime™
	Adhesives					
	TreadBond™*	M700P	TreadBond™*	TimberStrong™	M700P	NuBroadlok® VRT
ш		Total Bond®		Silent Bond™	EnPress™	NuBroadlok®
ADHESIVES & SUBFLOOR PREP		M99		M92X™	TreadBond™*	TreadBond™*
		MS160		TreadBond™*		
		M95				
		V-One®				
		M640				
		TreadBond™*				
	ScentStop™	ScentStop™	ScentStop™	ScentStop <sup>™</sup>	ScentStop™	ScentStop™
	PerimeterSeal™	PerimeterSeal™	PerimeterSeal™	PerimeterSeal™		
CLEANERS & TOOLS						

<sup>\*</sup> Stair Solutions adhesive



# ADHESIVES, UNDERLAYMENTS & STAIR SOLUTIONS GLOSSARY



**Heavy Loads** Flooring can withstand heavy loads rolling across the floor on caster

wheels up to 150 pounds per wheel.

**Spread Rate** The amount of coverage which can be expected from a given amount of

adhesive when spread using the recommended trowel.

RH Relative Humidity

The measurement of allowable moisture in a concrete slab for the adhesive

to function properly.

Base Formula The primary chemical that makes up the product. This is important when

considering potential chemical interactions, especially for wood adhesives.

Wood finishes may react with urethanes, which can cause a cloudy appearance. This reaction cannot be corrected once it has taken place.

Performance Accessories adhesives use modified urethanes and modified

silanes, which are harmless to wood finishes and easily cleaned up.

IIC Impact Insulation Class

IIC is an acoustic or sound rating that indicates how well a floor assembly

blocks impact vibrations, such as footfalls or dropped items hitting the floor. The higher the IIC rating, the better the assembly performs at

blocking impact noises.

STC Sound Transmission Class

The rating system for measuring the ability of a partition to reduce the

effect of airborne sound.

**Tread** The horizontal surface of the stair you step on.

**Nosing** The front edge of the tread that overhangs the riser.

**Riser** The vertical space between each step or the "face of the step."

Return The finished edge or trim piece that is used to cover the exposed side of a

stair tread, particularly when the stairs are open on one or both sides.



The perfect finishing touch for any floor.









