

Chromascope 2.5 | 5.0

As the digital world becomes omnipresent in our lives, color can provide the engaging stimuli necessary to help us reclaim our humanity and our place within the ecosystem. Subdued pastoral brights wash over natural earth tones to bring biophilic harmony through Chromascope. This LVT takes its hues from the places where we find both solace and renewed focus: whether it be sunrise over a mountain peak, or the deep shading of the forest.

Chromascope is part of the Hot & Heavy II collection, available in both 5.0mm and 2.5mm thicknesses to deliver installation advantages that save time and reduce cost. The 5.0 thickness can be installed with a loose-lay method; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive. Quickship is also offered on several neutral colorways in the 2.5mm thickness.

With a 18" x 36" format and 24 colorways for a wide variety of design possibilities, Chromascope makes it easy to create a space that is as unique as its inhabitants.




Learn more at mohawkgroup.com

Cover:

Chromascope 2.5 | 5.0, 230 Tan Essence, 248 Melon Harmony, 270 Warm Haven, 650 Serene Navy, 672 Tranquil Teal, 760 Fresh Sprout, Custom Installation






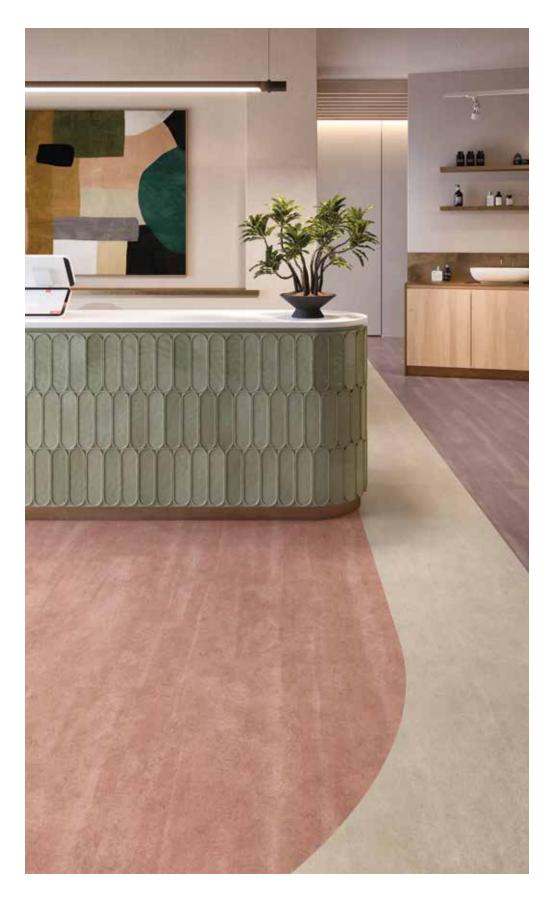

Chromascope 2.5 | 5.0, 344 Muted Maroon, 230 Tan Essence, 248 Melon Harmony

Ш

Colorways



248 Melon Harmony



344 Muted Maroon



440 Orange Embrace



550 Red Flame



230 Tan Essence



250 Cozy Linen



360 Radiant Gold



475 Purple Dream



555 Regal Blue



237 Peach Bliss



270 Warm Haven



374 Crimson Glow



540 Violet Cascade



620 Soft Sky



650 Serene Navy



760 Fresh Sprout



940 Balanced Charcoal



672 Tranquil Teal



790 Restorative Green



960 Whispering Grey



676 Celestial Forest



910 Gentle Haze




980 Grounded Black

QuickShip

Mohawk Group is ready to help you when you need it with our QuickShip program. Get quick access to hundreds of commercial flooring products available to ship within 10 business days (up to 2,000 square yards for Soft Surface and up to 5,000 square feet for Hard Surface) and curated collections for those fast turnaround projects.

QuickShip available for Chromascope 2.5 only. For the most up-to-date inventory, please visit www.mohawkgroup.com or reach out to your sales executive or customer service representative.



Chromascope 2.5 | 5.0 is available in two thicknesses, offering a seamless transition to a variety of soft surfaces and helping you meet the needs of different projects. Both products are designed with a 20 mil heavy commercial wear layer and our premium M-Force™ Ultra technology, which delivers a complete performance system for LVT.

M-Force[™] Ultra

Hot & Heavy II features our M-Force™ Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Quicker Installation

The 5.0 thickness can be installed loose-lay; larger areas need only a perimeter spread of releasable adhesive. The 2.5 thickness can be installed with the same releasable adhesive. No wet-set installation needed.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon offset for a Net-Positive impact.



Styles from the Hot & Heavy II Collection are the only LVT products on the market to be NFSI Certified Slip Resistant in wet conditions.



Our portfolio of architectural and cove wall bases are offered in 14 QuickShip colors that coordinate perfectly with our full suite of soft and hard surface products.



2.5MM FLEX

Reducing installation time and costs, no transition strips are needed between the 2.5mm platform and EcoFlex™ Matrix backed carpet tile products. The 2.5mm tiles use the same releasable adhesive as the 5.0mm tiles. No wet-set installation is needed.

- May contribute toward LEED/WELL
- UL certified EPD

- No ortho-phthalates
- Floorscore® certified for low VOCs



5.0MM FLEX

Reducing installation time and costs, no transition strips are needed between the 5.0mm platform and EcoFlex™ ONE or EcoFlex™ AIR backed carpet tile products. The 5.0mm tiles may be installed loose-lay; areas larger than 20' in any direction require a perimeter spread of releasable adhesive.

- May contribute toward LEED/WELL
- UL certified EPD

- No ortho-phthalates
- Floorscore® certified for low VOCs



Running Line Rug Program

Unlock your creative freedom with our innovative Running Line Rug Program. Dive in and explore our carefully curated styles, mix and match colors, sizes, and edge treatments to create the perfect rug for your space.



Specifications

Chromascope 2.5mm (C2113) Chromascope 5.0mm (C2114)

DESIGN

Colors

Product Type Luxury Vinyl Tile - Flexible

Overall Thickness 2.5mm 5.0mm
Wear Layer 20 mil (0.5mm)
Finish M-Force TM Ultra

 2.5mm Actual
 18" x 36"

 5.0mm Actual
 18" x 36"

 Emboss
 Overall

 Edge Profile
 Squared Edge

 Installation & Adhesive
 2.5mm Glue Down

 5.0mm Loose Lay

Packaging
2.5mm
12 pcs per carton / 54 sq ft per carton
5.0mm
6 pcs per carton / 27 sq ft per carton

24

For detailed adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction
Classification
ASTM F1700 - Class III, Type B - Embossed
Squareness
ASTM F2421 - Passes - ±0.10" max
Size and Tolerance
ASTM F2421 - Passes - ±0.016"/linear foot
Thickness
ASTM F386 - Passes, as specified ± .005"

Flexibility ASTM F137 - Passes - 1" mandrel
Dimensional Stability ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit ASTM F970 - Passes, modified at 1000 psi

Residual Indentation ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10% Resistance to Chemicals ASTM F925 - Passes - No more than a slight change

ASTM E662 - Meets, 450 or less

Resistance to Light ASTM F1515 - Passes, Δ E \leq 8 Resistance to Heat ASTM F1514 - Passes, Δ E \leq 8 Critical Radiant Flux ASTM E648 - Class 1 (>0.45 W/cm2)

Slip Resistance NFSI B101.1/B101.3 Slip Resistant Certified

SUSTAINABILITY

Smoke Density

Certification FloorScore® Certified

Carbon Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties Limited 20 Year M-Force™ Ultra Commercial

For detailed warranty information visit mohawkgroup.com







