



KOHLER[®]
COMMERCIAL LINE BOOK



TABLE OF CONTENTS	
Why Kohler	4
2024 New Products	6
Quick Reference Guide	7
Coordinated Solutions	12
Constellation Lavatory System	14
Flushometers	18
Mach Flushometers	20
Mach SKU Logic Chart/Conversion Kits	24
Mach Crossover Chart	25
Primme Flushometers	26
Flushometer/Fixture Compatibility Chart	28
Commercial Toilets & Seats	30
Ultra Flush Engine Flushometer Type Toilets	32
Addl Flushometer Type Toilets	34
Pressure Assist Toilets	35
Modflex Adjust-a-bowl	36
Kingston 2 piece - Gravity fed toilets	42
Toilet Seats	44
Urinals	46
Bardon Touchless	48
Tend	50
Addl Urinals	54
Faucets & Soap Dispensers	56
Single and Double Handle Faucets	58
Triton Bowe Faucets	60
Touchless Faucet Feature Availability Chart	64
Accliv Opening Price Point Touchless Faucet	66
Insight Touchless Technology	68
Kinesis Touchless Technology	70
Touchless Soap Dispensers	74
Lavatories	76
Service & Utility Sinks	82
Showering, Accessories, & Fittings	84
Lavatory Space Cross Reference	98
Toilet and Urinal Space Cross Reference	100
Good/Better/Best/Green Specification Packages	102

COMMERCIAL. REINVENTED.

Design & Innovation. Uncompromised.

Residential aesthetic designed with advanced engineering to deliver products built for the commercial environment and tested 2-3 times the industry standard.

Clean Space. Clean You.

For nearly 150 years, clean has been at the center of what we do. And we innovate our products so you can feel as clean and safe in a commercial space as you would at home.

Human Centric Design

A gracious experience is our mission. We are focused in understanding the user journey for all personas to develop products that universally deliver solutions that address unmet needs.

Sustainable Solutions

We Design for Environment, looking at the full life cycle of our products from function to end of life, to assure our products are positive by design and transparent - making it easy to support LEED projects.

DfE Strategy



Commitment

Kohler has invested heavily to build a global commercial organization, leveraging full resources of design, engineering, supply chain, marketing and sales, with concentrated effort in the U.S.

Strategy

Own the restroom! Grow the business through superior product offering and product line expansion. Be the innovation leader with touchless technologies designed for meaningful applications. Provide a complete eco-system to make it easy to specify Kohler.

Meaningful Differentiation

We are focused on evolving our core offering to meet the ever changing demands of the commercial environment as well as creating a strong pipeline of innovative product solutions that no one else can deliver.

THE BOLD LOOK
OF **KOHLER.**

MEANINGFUL DIFFERENTIATION



MODFLEX ADJUST-A-BOWL

Innovative, quick and affordable solution to convert wall-hung toilets to floor mount, using existing carrier required behind the wall.

KINESIS SENSOR TECHNOLOGY

Kinesis faucets and Soap Dispensers use Time-of-Flight sensors for more responsive actuation compared to typical infrared sensors.



CONSTELLATION LAVATORY SYSTEM



Specification, installation, and maintenance made easy.

Thoughtful details focused on elevating user experience and hygiene

MACH FLUSHOMETERS



Breaking product performance barriers to deliver unparalleled performance.

New Toilet flushrate of 1.0 GPF now available.

Watersense Certified

COORDINATED SOLUTIONS



Paired for optimized performance and ease of specification.

TEND COMPACT URINAL

Innovative P-trap design to ease installation, maintenance, and cleanability - while also being beautiful and sustainable.




MACH WAVE SENSOR TECHNOLOGY

Putting touchless control into hands of the user.



HYBRID ENERGY SYSTEM

We believe in power that lasts for decades. Providing power for 875,000 cycles which, on average usage, equates to 30 years of performance.

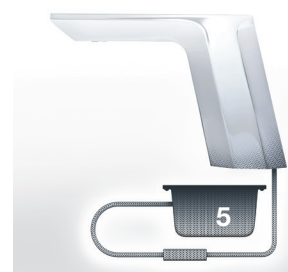


Constellation Lavatory System

The Constellation lavatory system is a revolutionary solution that simplifies the process of specifying, installing, and maintaining handwashing areas, all while delivering a solution focused on elevating the user experience.



New Faucet Designs

Accliv, Oblo Basic and Components Row has been added to our touchless faucet collection to broaden designs and give more options to the design community.

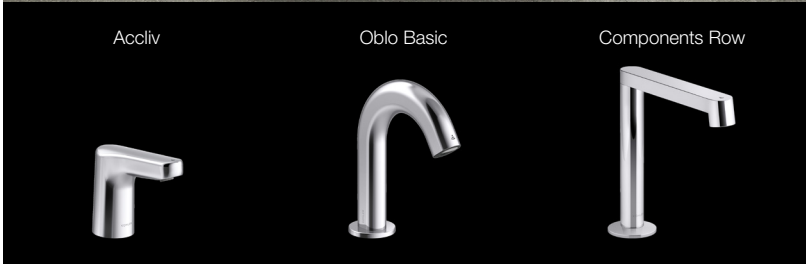

Finish Expansion

Bringing that residential aesthetic into the commercial environment by expanding our finish offering to now include Brushed Nickel (BN), Matte Black (BL), and Moderne Brushed Brass (2MB) on select touchless faucets, soap dispensers, flushometers, and accessories.




0.35 gpm Out of Box

More manual and touchless faucets across our collections are now available in 0.35 gpm out of box. No more needing to change out aerators, making it easier to support green building certifications like LEED®.



Hybrid Power Expansion

Uninterruptable power that lasts for 875,000 cycles (which equates to about 30 yrs of performance on average usage) is now available on our Kinesis touchless faucet collection.

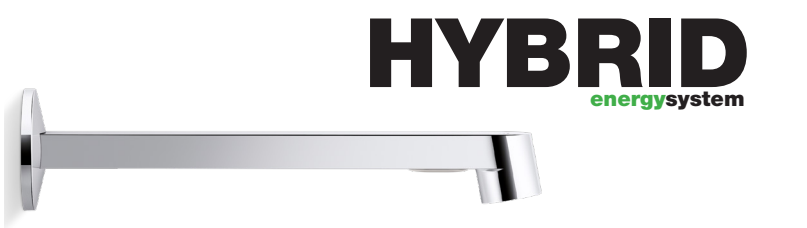

Accessories

Escutheons have been expanded to include 2-hole options, making it easy to convert manual installations to a touchless installation. Select accessories are also available



Bardon Touchless Urinal

Redesigned to deliver a more cost effective solution to customers. The Bardon Touchless Urinal with integrated flush valve provides the cleaner lines and look of a rear spud urinal with the easy valve access of a top spud.



Kingston 3-bolt

3-bolt configuration now available in our Kingston design family.



THE BOLD LOOK
OF **KOHLER**





Mach Tripoint touchless flushometer, Hybrid powered (Shown 10TH00K10-CP)

Toilet, 1.0 gpf	10TH00K10-CP	Toilet, 1.0 gpf	40TH00K10-CP
Toilet, 1.28 gpf	10TH00N10-CP	Toilet, 1.28 gpf	40TH00N10-CP
Toilet, 1.6 gpf	10TH00R10-CP	Toilet, 1.6 gpf	40TH00R10-CP
Urinal, 0.125 gpf	10UH00D20-CP	Urinal, 0.125 gpf	40UH00D20-CP
Urinal, 0.5 gpf	10UH00G20-CP	Urinal, 0.5 gpf	40UH00G20-CP
Urinal, 1.0 gpf	10UH00K20-CP	Urinal, 1.0 gpf	40UH00K20-CP

For DC-power versions of all flushometers listed above, please replace the “H” in the part numbers to “D”



Mach Wave touchless flushometer, Hybrid powered (Shown 40TH00K10-CP)

Toilet, 1.0 gpf	40TH00K10-CP	Toilet, 1.0 gpf	40TH00N10-CP
Toilet, 1.28 gpf	40TH00N10-CP	Toilet, 1.28 gpf	40TH00R10-CP
Toilet, 1.6 gpf	40TH00R10-CP	Urinal, 0.125 gpf	40UH00D20-CP
Urinal, 0.125 gpf	40UH00D20-CP	Urinal, 0.5 gpf	40UH00G20-CP
Urinal, 0.5 gpf	40UH00G20-CP	Urinal, 1.0 gpf	40UH00K20-CP



Mach Manual flushometer (Shown 80TM00K10-CP)

Toilet, 1.0 gpf	80TM00K10-CP
Toilet, 1.28 gpf	80TM00N10-CP
Toilet, 1.6 gpf	80TM00R10-CP
Urinal, 0.125 gpf	80UM00D20-CP
Urinal, 0.5 gpf	80UM00G20-CP



Primme flushometer (Shown 76321-CP)

Toilet, 1.28 gpf	76321-CP
Toilet, 1.6 gpf	76322-CP
Toilet, 1.6 gpf	76317-CP
Urinal, 0.125 gpf	76318-CP
Urinal, 0.5 gpf	76319-CP



Kingston wall-mount, elongated toilet, ADA (Shown 84325-0)

Top Spud	
1.0-1.6 gpf, 4-bolt	84325-0
... + antimicrobial	84325-SS-0
... + bedpan lugs	84325-SSL-0
1.28-1.6 gpf, 3-bolt	84434-0
Rear Spud	
1.0-1.6 gpf, 4-bolt	84323-0
... + antimicrobial	84323-SS-0
... + bedpan lugs	84323-SSL-0
1.28-1.6 gpf, 3-bolt	84454-0



Taut lavatory faucet

0.5 gpm	
W/out Grid Drain	46028-4-CP
W/ Grid Drain	46029-4-CP
0.35gpm	
(order one of the SKUs above and the aerator kit below)	
Aerator Kit	30307-CP



Coralais lavatory faucet

0.5 gpm	
W/out Grid Drain	15199-4NDRA-CP
W/ Grid Drain	15198-4RA-CP
W/ Pop-up drain	15583-4RA-CP
0.35 gpm	
W/ Grid drain	15198-4ATA-CP
W/ Pop-up drain	15583-4ATA-CP



Triton Bowe centerset lavatory faucet with gooseneck spout (shown 400T70-5ANA-CP)

0.5 gpm, wristblade	
Aerated	400T70-5ANA-CP
Laminar	400T70-5ANL-CP
0.35 gpm	
Aerated	400T70-5ATA-CP



Triton Bowe widespread lavatory faucet with low spout (shown 800T20-5ANA-CP)

0.5 gpm, wristblade	
Aerated	800T20-5ANA-CP
Laminar	800T20-5ANL-CP
0.35 gpm, lever	
Aerated	800T20-4ATA-CP



Accliv touchless faucet
Base faucet (no drain, mixer, or supply lines)
0.5 gpm 103A36-SBNA-CP
0.35 gpm 103A36-SBTA-CP
Power Options (choose one option below to go w/ base faucet)
AC Single 13480-A-NA
DC 36264-NA
Hybrid 28520-NA



Bardon Touchless urinal, integrated flushometer, ADA

0.5 gpf	32590-0
---------	---------



Bardon half stall urinal, ADA (Shown 4991-ET-0)

Top Spud	
0.125-1.0 gpf	4991-ET-0
... + antimicrobial	4991-ETSS-0
Rear Spud	
0.125-1.0 gpf	4991-ER-0
... + antimicrobial	4991-ERSS-0



Tend compact urinal, ADA (Shown 20713-ET-0)

Top Spud	
0.125-1.0 gpf	20713-ET-0
... + antimicrobial	20713-ETSS-0
Rear Spud	
0.125-1.0 gpf	20713-ER-0
... + antimicrobial	20713-ERSS-0



Steward urinal, ADA (Shown 4991-ET-0)

Top Spud	
0.125 gpf	5244-ET-0
0.125 gpf	
Rear Spud	
0.125 gpf	5244-ER-0



Dexter compact urinal, ADA (Shown 5452-ET-0)

Top Spud	
0.125 gpf	5452-ET-0
... + antimicrobial	5452-ETSS-0
0.5-1.0 gpf	5016-ET-0
... + antimicrobial	5016-ETSS-0
Rear Spud	
0.125 gpf	5452-ER-0
... + antimicrobial	5452-ERSS-0
0.5-1.0 gpf	5016-ER-0
... + antimicrobial	5016-ERSS-0



Gooseneck touchless faucet with **Insight sensor**, 0.5 gpm

Single Supply	
AC Power	13475-CP
DC Power	13473-CP
Hybrid Power	7518-CP
With Mixer	
AC Power	13474-CP
DC Power	13472-CP
Hybrid Power	7519-CP



Geometric touchless faucet with **Insight sensor**, 0.5 gpm

Single Supply	
AC Power	13469-CP
DC Power	13467-CP
Hybrid Power	7516-CP
With Mixer	
AC Power	13468-CP
DC Power	13466-CP
Hybrid Power	7517-CP



Sculpted touchless faucet with **Insight sensor**, 0.5 gpm

Single Supply	
AC Power	13463-CP
DC Power	13461-CP
Hybrid Power	7514-CP
With Mixer	
AC Power	13462-CP
DC Power	13460-CP
Hybrid Power	7515-CP



Strayt touchless faucet with **Kinesis sensor**, 0.5 gpm

Single Supply	
AC Power	103S36-SANA-CP
DC Power	104S36-SANA-CP
Hybrid Power	106S36-SANA-CP
With Mixer	
AC Power	103S37-SANA-CP
DC Power	104S37-SANA-CP
Hybrid Power	106S37-SANA-CP



Kumin touchless faucet with **Kinesis sensor**, 0.5 gpm

Single Supply	
AC Power	103K36-SANA-CP
DC Power	104K36-SANA-CP
Hybrid Power	106K36-SANA-CP
With Mixer	
AC Power	103K37-SANA-CP
DC Power	104K37-SANA-CP
Hybrid Power	106K37-SANA-CP



Wellcomme floor-mount, floor outlet, elongated toilet (Shown 96053-0)

Top Spud	
1.0-1.6 gpf	96053-0
... + antimicrobial	96053-SS-0
... + bedpan lugs	96053-SSL-0
Rear Spud	
1.0-1.6 gpf	96054-0
... + antimicrobial	96054-SS-0
... + bedpan lugs	96054-SSL-0



Highcliff floor-mount, floor outlet, elongated toilet, ADA (Shown 96057-0)

Top Spud	
1.0-1.6 gpf	96057-0
... + antimicrobial	96057-SS-0
... + bedpan lugs	96057-SSL-0
Rear Spud	
1.0-1.6 gpf	96058-0
... + antimicrobial	96058-SS-0
... + bedpan lugs	96058-SSL-0



Anglesey floor-mount, rear outlet, elongated toilet, ADA (Shown 4352-0)

Top Spud	
1.28-1.6 gpf	4352-0
... + antimicrobial	4352-SS-0
1.28-1.6 gpf	
... + bedpan lugs	4352-L-0



Anglesey floor-mount, rear outlet, elongated toilet (Shown 4386-0)

Top Spud	
1.6 gpf	4386-0
... + antimicrobial	4386-SS-0
1.6 gpf	
... + bedpan lugs	4386-L-0
Rear Spud	
1.6 gpf	4396-0



Modflex floor-mount, rear outlet, elongated toilet, top spud, antimicrobial, ADA (Shown 25042-SS-0)

1.28-1.6 gpf	25042-SS-0
... + bedpan lugs	25042-SSL-0



Oblo touchless faucet with **Kinesis sensor**, 0.5 gpm

Single Supply	
AC Power	103B76-SANA-CP
DC Power	104B76-SANA-CP
Hybrid Power	106B76-SANA-CP
With Mixer	
AC Power	103B77-SANA-CP
DC Power	104B77-SANA-CP
Hybrid Power	106B77-SANA-CP



Loure touchless faucet with **Kinesis sensor**, 0.5 gpm

Single Supply	
AC Power	103L76-SANL-CP
DC Power	104L76-SANL-CP
Hybrid Power	106L76-SANL-CP
With Mixer	
AC Power	103L77-SANL-CP
DC Power	104L77-SANL-CP
DC Power	106L77-SANL-CP



Components touchless faucet with **Kinesis sensor**, 0.5 gpm

Single Supply	
AC Power	103M36-SANA-CP
DC Power	104M36-SANA-CP
Hybrid Power	106M36-SANA-CP
With Mixer	
AC Power	103M37-SANA-CP
DC Power	104M37-SANA-CP
Hybrid Power	106M37-SANA-CP



Composed touchless faucet with **Kinesis sensor**, 0.5 gpm

Single Supply	
AC Power	103C36-SANA-CP
DC Power	104C36-SANA-CP
Hybrid Power	106C36-SANA-CP
With Mixer	
AC Power	103C37-SANA-CP
DC Power	104C37-SANA-CP
Hybrid Power	106C37-SANA-CP



Touchless soap dispensers
Composed (Top)
AC Power 25198-CP
DC Power 25195-CP
Curve (Middle)
AC Power 25197-CP
DC Power 25194-CP
Angled (Bottom)
AC Power 25196-CP
DC Power 25193-CP



Wellworth 2-pc pressure assisted, elongated toilet (Shown 3519-0)

1.0 gpf, LH Trip lever	3531-0
1.0 gpf, RH Trip lever	3531-RA-0
1.6 gpf, LH Trip lever	3505-0
1.6 gpf, RH Trip lever	3505-RA-0



Highline 2-pc pressure assisted, elongated toilet, ADA (Shown 3519-0)

1.0 gpf, LH Trip lever	3519-0
1.0 gpf, RH Trip lever	3519-RA-0
1.6 gpf, LH Trip lever	3493-0
1.6 gpf, RH Trip lever	3493-RA-0



Barrington 2-pc pressure assisted, elongated toilet, ADA (Shown 3519-0)

1.0 gpf, LH Trip lever	3578-0
1.0 gpf, RH Trip lever	3578-RA-0



Kingston 2-pc gravity fed elongated toilet, ADA (Shown 25077-0)

1.28 gpf, LH Trip lever	25077-0
... + antimicrobial	25077-SS-0
1.28 gpf, RH Trip lever	25077-RA-0
... + antimicrobial	25077-SSRA-0



Top:
Stronghold elongated, open front toilet seat, integral handle Check Hinge 4731-C-0
Bottom:
Lustra elongated, open front toilet seat With lid 4650-0



Caxton undermount sink, with overflow (Shown 2210-0)

Oval - 15"x12"	2209-0
Oval - 17"x14"	2210-0
Oval - 19"x15"	2211-0
Rectangle	20000-0



Verticyl undermount sink, with overflow (Shown 2882-0)

Oval	2881-0
Rectangle	2882-0
Round	2883-0
Square	8188-0



Kingston wall-mount lavatory, with overflow (Shown 2007-0)

1-hole faucet, No soap	2007-0
1-hole faucet, LH soap	2007-L-0
1-hole faucet, RH soap	2007-R-0
Centerset, No soap	2005-0
Widespread, No soap	2006-0



Soho wall-mount lavatory, with overflow, (Shown 2084-N-0)

1-hole faucet, No soap	2084-0
1-hole faucet, LH soap	2084-L-0
1-hole faucet, RH soap	2084-R-0
Centerset, No soap	2054-0
Widespread, No soap	2053-0



Brenham wall-mount lavatory, with overflow (Shown 1997-1-0 lav w/ 1998-0 shroud)

1-hole faucet, No soap	1997-1-0
1-hole faucet, LH soap	1997-1L-0
1-hole faucet, RH soap	1997-1R-0
Centerset, No soap	1997-4-0
Widespread, No soap	1997-8-0
Shroud	1998-0

KITCHEN & BOH

SHOWER

SERVICE SINK ACCESSORIES



Sterling Valton kitchen sink faucet, 1.5 gpm

Single handle 24279-CP



Sterling Medley pull down kitchen sink faucet, 1.5 gpm

Single handle 24274-CP



Triton Bowe kitchen sink faucet with wristblade handles (shown 810T71-5AHA-CP)

1.5 gpm 810T70-5AHA-CP
1.8 gpm 810T70-5AFA-CP
With sidespray
1.5 gpm 810T71-5AHA-CP
1.8 gpm 810T71-5AFA-CP



Crue pull down kitchen sink faucet, 1.5 gpm

Single handle 22972-CP



Purist professional kitchen sink faucet, 1.5 gpm

Single handle 24982-CP



Sterling Middleton top-mount kitchen sink, ADA (shown 14631-3-NA)

25", Single Bowl 14631-3-NA
33", Double Bowl 14633-3-NA



Sterling McAllister undermount kitchen sink, ADA (shown 32023-NA)

24", Single Bowl 32022-NA
32", Single Bowl 32023-NA



Vault undermount kitchen sink, ADA (shown 3894-NA)

15", Single Bowl 32027-1-NA
24", Single Bowl 3894-NA
32", Single Bowl 25939-NA
32", Double Bowl 25940-NA



Undertone undermount kitchen sink (shown 3325-NA)

15-1/2", Single Bowl 3336-NA
23", Single Bowl 3325-NA
31-1/2", Single Bowl 3183-NA
31-1/2", Double Bowl 3171-NA



Duostrainer sink drain and strainer

With tailpiece 8801-CP



Honesty shower trim, ADA (shown TS99764-4G-CP)

Shower Trim TS99764-4G-CP
1.75 gpm
Less showerhead TLS99764-4-CP

Pressure Balance Valve With Stops 8304-KS-NA



Pitch shower trim, ADA (shown TS97077-4G-CP)

Shower Trim TS97077-4G-CP
1.75 gpm
Less showerhead TLS97077-4-CP

Pressure Balance Valve With Stops 8304-KS-NA



Awaken showerheads, 1.5 gpm (G series top image, B series bottom image)

G90, Single Function 72422-CP
G90, Multi Function 72418-H-CP
G110, Multi Function 72419-H-CP
B90, Single Function 72416-CP
B90, Multi Function 72424-H-CP
B110, Multi Function 72425-H-CP



Rely alcove shower base, center drain

48"x42" 8648-0
60"x42" (Shown) 8659-0



Sterling OC-S-63 Vikrell roll-in shower with aging in place backerboards, center drain

63 1/4" x 39 3/8" 62060106-0



Kumin grab bars, ADA

12" grab bar 24548-CP
18" grab bar 24549-CP
24" grab bar 24550-CP
36" grab bar 24551-CP
42" grab bar 22824-CP



Kumin accessories

TP holder 24546-CP
Double TP w/ cover 29224-CP
Robe hook 97897-CP
Towel Ring 97898-CP
18" towel bar 97878-CP
24" towel bar 97882-CP
Hotelier 24552-CP



Elate accessories

TP holder 27292-CP
Double TP 27289-CP
Robe hook 27290-CP
Towel Arm 27291-CP
18" towel bar 27286-CP
24" towel bar 27287-CP
Hotelier 27294-CP



Square grab bars

12" grab bar 23293-CP
18" grab bar 23294-CP
24" grab bar 23295-CP
36" grab bar 23296-CP
42" grab bar 23297-CP



Honesty accessories

TP holder 26638-CP
Robe hook 26636-CP
Towel Arm 26637-CP
18" towel bar 26633-CP
24" towel bar 26634-CP
24" double towel bar 26643-CP



Triton Bowe service sink faucet with wall brace, pail hook, full flow (shown 830T40-5A-CP)

Vacuum Breaker 837T60-4A-CP
Without VB 830T40-5A-CP
Integral Stops 838T60-4A-CP



Triton Bowe service sink faucet with pail hook, full flow (shown 830T10-5A-CP)

Vacuum Breaker 830T60-4A-CP
Without VB 830T10-5A-CP
Integral Stops 838T40-5A-CP



Triton Bowe service sink faucet with pail hook, vacuum breaker, integral stops, full flow

With hose 838T80-4A-CP



Bannon wall mount Service Sink drilled with 8" center holes (shown 6716-0)

22" 6714-0
24" 6716-0
Required Adjustable Trap 6673-NA



Whitby floor mount Service Sink

Corner 28"x28" 6714-0
Optional rim guard 8940-NA





Modflex® Adjust-a-Bowl® with Mach® Tripoint® 1.28 gpf flushometer
K-PR25042-T4HS-NA

COORDINATED SOLUTIONS for toilets and urinals

Coordinated solutions pair KOHLER® fixtures with the Mach® flushometer platform for optimized performance and ease of specification. Mach flushometers feature an innovative patented piston design constructed with leading-edge material that prevents mineral buildup and allows for high-precision manufacturing, delivering exceptional performance and reliability. Select from a range of flush rates and power options that pair with toilets and urinals shown below.



				MACH TRIPOINT TOUCHLESS FLUSHOMETERS				
				DC-Powered			Hybrid-Powered	
Product Type	Product Name	Fixture SKU	Variations	1.0 GPF (K-10TD00K10-CP)	1.28 GPF K-10TD00N10-CP	1.6 GPF K-10TD00R10-CP	1.0 GPF (K-10TH00K10-CP)	1.28 GPF K-10TH00N10-CP
WALL-MOUNT TOILETS	Kingston Ultra	K-84325-0	Top Spud	PR84325-T3D-NA	PR84325-T4D-NA	PR84325-T5D-NA	PR84325-T3H-NA	PR84325-T4H-NA
		K-84325-SS-0	Top Spud Antimicrobial	PR84325-T3DS-NA	PR84325-T4DS-NA	PR84325-T5DS-NA	PR84325-T3HS-NA	PR84325-T4HS-NA
FLOOR-MOUNT TOILETS	Highcliff Ultra	K-96057-0	Top Spud	PR96057-T3D-NA	PR96057-T4D-NA	PR96057-T5D-NA	PR96057-T3H-NA	PR96057-T4H-NA
		K-96057-SS-0	Top Spud Antimicrobial	PR96057-T3DS-NA	PR96057-T4DS-NA	PR96057-T5DS-NA	PR96057-T3HS-NA	PR96057-T4HS-NA
	Wellcomme Ultra	K-96053-0	Top Spud	PR96053-T3D-NA	PR96053-T4D-NA	PR96053-T5D-NA	PR96053-T3H-NA	PR96053-T4H-NA
		K-96053-SS-0	Top Spud Antimicrobial	PR96053-T3DS-NA	PR96053-T4DS-NA	PR96053-T5DS-NA	PR96053-T3HS-NA	PR96053-T4HS-NA
	Modflex Adjust-a-Bowl†	K-25042-SS-0	Top Spud Antimicrobial	N/A	PR25042-T4DS-NA	PR25042-T5DS-NA	N/A	PR25042-T4HS-NA
		K-25042-SSL-0	Top Spud Antimicrobial Bedpan Lugs	N/A	PR25042-T4DSL-NA	PR25042-T5DSL-NA	N/A	PR25042-T4HSL-NA

				MACH TRIPOINT TOUCHLESS FLUSHOMETERS			
				DC-Powered		Hybrid-Powered	
Product Type	Product Name	Fixture SKU	Variations	0.125 GPF K-10UD00D20-CP	0.5 GPF K-10UD00G20-CP	0.125 GPF K-10UH00D20-CP	0.5 GPF K-10UH00G20-CP
URINALS	Bardon	K-4991-ET-0	Top Spud	PR4991-T1D-NA	PR4991-T2D-NA	PR4991-T1H-NA	PR4991-T2H-NA
	Dexter	K-5452-ET-0	Top Spud	PR5452-T1D-NA	PR5016-T2D-NA	PR5452-T1H-NA	PR5016-T2H-NA
		K-5452-ETSS-0	Top Spud Antimicrobial	PR5452-T1DS-NA	PR5016-T2DS-NA	PR5452-T1HS-NA	PR5016-T2HS-NA
	Tend‡	K-20713-ET-0	Top Spud	PR20713-T1D-NA	PR20713-T2D-NA	PR20713-T1H-NA	PR20713-T2H-NA

To place an order for the above combinations, please order fixture/flushometer SKUs separately.

* Ultra flush engine is designed to outperform competitors' bowls in cleanliness and plug resistance, engineered to flush effectively at low water pressure and flow, and has a flexible water-consumption rate.

† Innovative adjustable-height Modflex connector attaches to the existing wall carrier, requiring no construction behind the wall. Saves thousands of dollars in lost room revenue, material, and labor. Retrofit takes less than one hour compared to one to two days for a total renovation.

‡ Tend features a P-trap that can be removed and replaced if necessary, allowing you to reuse the vitreous china.



All fixtures and flushometers listed, with the exception of the 1.6 gpf options, are WaterSense® labeled.



All fixtures and flushometers listed, with the exception of Wellcomme, are compliant to ADA when installed to the specific requirements of this regulation.

Items with the antimicrobial variation have an antimicrobial agent that is baked into the glaze and inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture's surface. This product does not protect users against bacteria, viruses, or other disease



FLUSHOMETER FINISH
Polished Chrome (CP)



FIXTURE COLOR
White (0)



Constellation 60" Trough Lavatory System
K-81027-BSS-KED
Composed® Wall-Mount Touchless
Faucet and Soap Dispenser
K-181027-BC1-BL

Constellation™ Lavatory System

Specification, installation, and maintenance made easy.

THE BOLD LOOK
OF **KOHLER**®

Constellation™ Lavatory System



Constellation 90" Trough Lavatory System
K-81033-BPW-KEW
Composed® Touchless
Faucet and Soap Dispenser
K-181033-BC1-BL

The Constellation lavatory system is a revolutionary solution that simplifies the process of specifying, installing, and maintaining handwashing areas. This system is designed to enhance the experience for everyone involved, from specifiers and wholesalers to installers, end users, and cleaning and maintenance staff. Constellation offers a comprehensive solution that fulfills any commercial bathroom need with a streamlined process only from Kohler.

Constellation lavatory systems offer high-level designs, elevating the look of the space so that it feels more like a residential bathroom.



Optimized for Experience

Kohler's Human Factors Lab studied the way people engage with and use a commercial bathroom. The research resulted in designs optimized for user experience, including convenient dry spaces, innovative handwashing stations, and bag hooks.



ADA-Compliant

Both the deck-mount and backsplash configurations of the Constellation lavatory system meeting Lavatory and Sink ADA guidelines and allow for an ADA-height mirror to be installed directly above the system.



Constellation 30" Basin Lavatory System
K-81024-BPW-KEG
Composed® Touchless
Faucet and Soap Dispenser
K-181024-BC1-2MB
Shown With:
Modflex® Adjust-a-Bowl® Toilet
K-25042-SS-0
Stronghold® Elongated Toilet Seat
K-4731-GC-0
Mach® Tripoint® 1.28 GPM Touchless Flushometer
K-10TD00N10-2MB

Clean and Hygienic

When designing the Constellation™ lavatory system, Kohler considered all factors to ensure a clean and hygienic space for every user.



Touchless technology incorporated into faucets and soap dispensers activate when you need them, providing a hands-free environment.



The slope of the lavatory and zero front edge ensure any splash is directed away from the user and off their clothing.

Easy to Install and Maintain

The system was designed to make it easy to install, clean, and maintain.



The backsplash model allows for easy installation of the wall-mount faucets. No need to drill into the wall for the faucet installation.



Hinged door with standard key locks provide security as well as easy access for maintenance staff.

Constellation™ Product Details

The Constellation lavatory system is available in ten configurations that define sink style, faucet installation, and size.

	SKU	Description	Size
	K-81029	Basin With Deck-Mount Faucet	30"
	K-81030	Basin With Deck-Mount Faucets	60"
	K-81031	Basin With Deck-Mount Faucets	90"
	K-81032	Trough With Deck-Mount Faucets	60"
	K-81033	Trough With Deck-Mount Faucets	90"

	SKU	Description	Size
	K-81024	Basin With Wall-Mount Faucet	30"
	K-81025	Basin With Wall-Mount Faucets	60"
	K-81026	Basin With Wall-Mount Faucets	90"
	K-81027	Trough With Wall-Mount Faucets	60"
	K-81028	Trough With Wall-Mount Faucets	90"

Shroud Finish Options

The vanity bottom is available in two finishes: Brushed Stainless Steel or White Powder-Coated.



Brushed Stainless Steel (SS)



White Powder-Coated (PW)

Faucet Design Options

Touchless faucets and soap dispensers are available for deck-mount installation in three styles. The Composed® style is also available for wall-mount installation.

Deck-Mount			Wall-Mount	
Composed (C)	Oblo® (B)	Kumin® (K)	Composed (C)	

Lavatory Materials and Colors

The lavatories are available in Corian or Silestone material with a choice of fourteen colors.

Corian							
	Glacier White (KCG)	Designer White (KCD)	Arrowroot (KCR)	Canvas (KCC)	Neutral Concrete (KCN)	Concrete (KCT)	Ash Concrete (KCE)
	Iconic White (KEW)	Miami White (KEH)	Eternal Calacatta Gold (KEG)	Eternal Bianco Calacatta (KEB)	Eternal Statuario (KES)	Pearl Jasmine (KEP)	Desert Silver (KED)

Finish Options

Faucets, soap dispensers, and accessories are available in four durable finish options.


Polished Chrome (CP)	Vibrant® Brushed Nickel (BN)	Vibrant® Brushed Moderne Brass (2MB)	Matte Black (BL)

ADA Touchless products comply with the actuation force limitations of the 2010 ADA Standards for Accessible Design, Section 309 Operable Parts, of the Act.

Lavatories will comply with the Americans with Disabilities Act when installed per the requirements of the 2010 ADA standards for Accessible Design.

Codes/Standards - Faucets	Codes/Standards - Lavatories
ASME A112.18.1/CSA B125.1	IAMPO IGC 156
NSF/ANSI/CAN 61	ADA
NSF/ANSI/CAN 372	ICC/ANSI A117.1
UL 1310	CSA B651
ADA	
ICC/ANSI A117.1	

Scan code for further product information and how to specify guides.





Mach Tripoint touchless 1.28gpf toilet flushometer K-10TD00N10-2MB

FLUSHOMETERS

The piston technology found in KOHLER® flushometers minimizes the water contact with chlorine-sensitive rubber components, increasing the longevity of the flush valve. The end result is reliable performance and lower maintenance, regardless of water conditions. Kohler's range of flush volumes means that you get a product that's right for every application and environment.



Mach Tripoint
K-10TH00K10-BL

Introducing Mach®, the next generation of commercial flushometers. Mach flushometers feature a new patented piston design that utilizes leading-edge materials to deliver unparalleled performance and accuracy. The Mach platform offers an innovative combination of style, performance, reliability, and flexibility—making it easy for you to find a solution to meet your specific installation requirements by choosing from various actuation systems, flush rates, and power options.

VARIATIONS AVAILABLE

TOUCHLESS ACTUATION: Mach Tripoint and Mach Wave
MANUAL ACTUATION: Mach Manual

TOILET FLUSH RATES : 1.6 GPF, 1.28 GPF, and 1.0 GPF
URINAL FLUSH RATES: 1.0 GPF, 0.5 GPF, 0.125 GPF

POWER: DC and long life Hybrid Energy System

FINISHES: Polished Chrome, Matte Black (**NEW**), Brushed Nickel (**NEW**), Moderne Brushed Brass (**NEW**),



Mach Tripoint

Features front facing sensor technology that is similar to an auto-focus camera. **TRIPPOINT™ Touchless Technology** senses the true distance of an object and is not affected by changes in color, lighting, reflections or distant movement. Tripoint delivers dependable, precise performance every time a user wishes to activate the toilet or urinal.



Mach Wave

Features a top facing sensor that puts the control back in the hands of the user, **WAVE Touchless Technology** offers hygienic touchless operation on command. Activates only when a hand is waved directly over the flushometer. Perfect solution for healthcare, family restrooms, and offices. Technology that only Kohler can offer.



Mach Manual

Manual actuation and elevated aesthetics combine to deliver a high performing solution for those installations where touchless is not desired. The clean design lines and flat features not only give you a design forward aesthetic, but also minimizes the surfaces where dirt and water can build up, making it easy to clean and less prone to corrosion.

Reliable

Patented Piston Valve technology delivers unparalleled performance and accuracy.

Flexible Installation

Flushometers can be installed either left-hand or right-hand orientation. Deep rough-ins kits and conversion kits available.

Lower Environmental Impact

With the accuracy of the Mach. patented piston technology, we are able to push the boundaries by now offering 1.0 gpf toilet flush rate options for touchless and manual flushometers. This allows for 37.5% water savings from baseline—a fantastic option for LEED certification projects. All flushometers that meet WaterSense® guidelines of acceptable flush rates are also now WaterSense certified.

Mach Tripoint and Mach Wave are also available in our Hybrid Energy System that combines a long life lithium battery, capacitor and optimized electronics to deliver 875,000 cycles (approximately 30 years of uninterrupted power on average use), decreasing parts entering the waste stream.

Durable

Chlorine/Chloramine resistant materials. Tested to 3x industry standard.

Vandal Resistant

Vandal resistant stop valves and non-hold open actuators.

Clean

Touchless flushometers minimizes cross contamination. Clean lines and flat features help keep the product easy to clean.

Style Compatibility

Pairs perfectly with KOHLER. fixtures for optimized performance.



TOUCHLESS ²	DESIGN	FLUSH RATE (gallons per flush)			DC POWER	HYBRID	FINISHES (BN, 2MB, BL referenced below is only available on DC-power flushometers)
	Mach Tripoint Toilet	1.0	•	•	K-10TD00K10	K-10TH00K10	CP, BN, 2MB, BL
		1.28	•	•	K-10TD00N10 ¹	K-10TH00N10 ¹	CP, BN, 2MB, BL
		1.6		•	K-10TD00R10 ¹	K-10TH00R10 ¹	CP, BN, 2MB, BL
	Mach Tripoint Urinal	0.125	•	•	K-10UD00D20	K-10UH00D20 ¹	CP, BN, 2MB, BL
		0.5	•	•	K-10UD00G20	K-10UH00G20 ¹	CP, BN, 2MB, BL
		1.0		•	K-10UD00K20	K-10UH00K20 (washout) K-10UH00K30 ¹ (blowout)	CP
	Mach Wave Toilet	1.0	•	•	K-40TD00K10	K-40TH00K10	CP
		1.28	•	•	K-40TD00N10 ¹	K-40TH00N10 ¹	CP
		1.6		•	K-40TD00R10 ¹	K-40TH00R10 ¹	CP
		3.5		•	N/A	K-40TH00V10	CP
	Mach Wave - Urinal	0.125	•	•	K-40UD00D20	K-40UH00D20 ¹	CP
		0.5	•	•	K-40UD00G20	K-40UH00G20 ¹	CP
		1.0		•	K-40UD00K20	K-40UH00K20 ¹	CP
MANUAL ²	DESIGN	FLUSH RATE (gallons per flush)			MANUAL		
	Mach Manual Toilet	1.0	•	•	K-80TM00K10		CP
		1.28	•	•	K-80TM00N10		CP
		1.6		•	K-80TM00R10		CP
	Mach Manual Urinal	0.125	•	•	K-80UM00D20		CP
		0.5	•	•	K-80UM00G20		CP

¹ Retrofit versions available. Add "-RF" to end of SKU.
² Conversion kits to upgrade Kohler. flushomters to the Mach platform are available. Please contact your Kohler Sales Executive for more detail.



WaterSense®-labeled toilets use at least 20% less water than standard 1.6-gallon toilets while still meeting strict flushing performance guidelines.

WaterSense®-labeled urinals use at least 50% less water than standard 1.0-gallon urinals while still meeting strict flushing performance guidelines.

Codes & Standards (Manual Flushometers)
ASSE 1037/ASME A112.1037/CSA B125.37
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC



Products labeled ADA or ADA-compliant will comply with the Americans with Disabilities Act, when installed per the requirements of the 2010 ADA Standards for Accessible Design, Section 605 (Urinals), of the Act.

Codes & Standards (Touchless Flushometers)
ASME A112.18.1/CSA B125.1
ASSE 1037/ASME A112.1037/CSA B125.37
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC



Polished Chrome (CP)



Vibrant® Brushed Nickel (BN)



Vibrant Brushed Moderne Brass (2MB)



Matte Black (BL)

MACH FLUSHOMETER SKU LOGIC CHART



EXAMPLE: Mach Tripoint 1.0 GPF toilet, Hybrid-power in Polished Chrome = 10TH00K10-CP

10		T		H		00		K		10		-	CP	
ACTUATION TYPE		INSTALLATION TYPE		POWER OPTION		VARIATION		FLUSH AMOUNT (GPF)		ADDITIONAL DESCRIPTOR		-	FINISH	
10	Automatic Touchless	T	Toilet	M	Manual	00	Base Variation	D	0.125	10	1 1/2" Tail piece		CP	Polished Chrome
40	Manual Touchless	U	Urinal	A	AC			G	0.5	20	3/4" Tail Piece		BN	Brushed Nickel
50	Dual Flush			D	DC			K	1.0	30	1 1/4" Tail Piece		BL	Matte Black
80	Manual			H	Hybrid			N	1.28				2MB	Moderne Brushed Brass
								R	1.6					
								V	3.5					

Not every configuration is available.

Retrofit SKUs available for some configurations. These products are noted with a "-RF" variation in the SKU.

MACH FLUSHOMETER CONVERSION KITS

FLUSHOMETER TYPE	FLUSHRATE	MANUAL Conversion Kit	TRIPPOINT Conversion Kit	WAVE Conversion Kit
		(contains Piston, Piston Cover Assembly, 1287291** Handle Assembly)	(contains Tripoint Sensor Cover Assembly, Solenoid/Piston Cover, Piston and Push Button Assembly)	(contains Wave Sensor, Solenoid/Piston Cover, Piston and Push Button Assembly)
URINAL	0.125 GPF			
	0.5 GPF	1388740**	1388852**	1388986**
	1.0 GPF	1388741**	1388853**	1388987**
TOILET	1.0 GPF	1388742**	1388854**	1388988**
	1.28 GPF	1388743**	1388855**	1388989**
	1.6 GPF	1388744**	1388856**	1388990**
	3.5 GPF	1388745**	1388857**	1388991**
		N/A	N/A	1388992**
**Please add finish code to SKU				

MACH FLUSHOMETER CROSSOVER CHART

Old Flushometer Platform		MACH Flushometer Platform	
SKU	Description	SKU	Description
Did Not Exist	Did Not Exist	80TM00K10-CP	MACH MANUAL 1.0 GPF TOILET
13517-CP	MANUAL 1.28 GPF TOILET	80TM00N10-CP	MACH MANUAL 1.28 GPF TOILET
13516-CP	MANUAL 1.6 GPF TOILET	80TM00R10-CP	MACH MANUAL 1.6 GPF TOILET
13520-CP	MANUAL 0.125 GPF URINAL	80UM00D20-CP	MACH MANUAL 0.125 GPF URINAL
13519-CP	MANUAL 0.5 GPF URINAL	80UM00G20-CP	MACH MANUAL 0.5 GPF URINAL
13518-CP	MANUAL 1.0 GPF URINAL	NA	NA
13516-RF-CP	MANUAL TOILET FLUSH VALVE 1.6GPF, RETROFIT	NA	NA
13517-RF-CP	MANUAL TOILET FLUSH VALVE 1.28GPF, RETROFIT	NA	NA
13518-RF-CP	MANUAL WASHDOWN URINAL VLV 1.0GPF, RETROFIT	NA	NA
13519-RF-CP	MANUAL WASHDOWN URINAL VLV 0.5GPF, RETROFIT	NA	NA
Did Not Exist	Did Not Exist	10TH00K10-CP	MACH TRIPOINT HYB 1.0 GPF TOILET
7531-CP	TRIPPOINT HYBRID 1.28 GPF TOILET	10TH00N10-CP	MACH TRIPOINT HYB 1.28 GPF TOILET
7531-RF-CP	TRIPPOINT HYBRID 1.28 GPF TOILET RETROFIT	10TH00N10-RF-CP	MACH TRIPOINT HYB 1.28 GPF TOILET RETROFIT
7535-CP	TRIPPOINT HYBRID 1.60 GPF TOILET	10TH00R10-CP	MACH TRIPOINT HYB 1.60 GPF TOILET
7535-RF-CP	TRIPPOINT HYBRID 1.60 GPF TOILET RETROFIT	10TH00R10-RF-CP	MACH TRIPOINT HYB 1.60 GPF TOILET RETROFIT
7546-CP	TRIPPOINT HYBRID 0.125 GPF URINAL	10UH00D20-CP	MACH TRIPOINT HYB 0.125 GPF URINAL
7546-RF-CP	TRIPPOINT HYBRID 0.125 GPF URINAL RETROFIT	10UH00D20-RF-CP	MACH TRIPOINT HYB 0.125 GPF URINAL RETROFIT
7537-CP	TRIPPOINT HYBRID 0.5 GPF URINAL	10UH00G20-CP	MACH TRIPOINT HYB 0.5 GPF URINAL
7537-RF-CP	TRIPPOINT HYBRID 0.5 GPF URINAL RETROFIT	10UH00G20-RF-CP	MACH TRIPOINT HYB 0.5 GPF URINAL RETROFIT
7539-CP	TRIPPOINT HYBRID 1.0 GPF BLOW OUT URINAL	10UH00K30-CP	MACH TRIPOINT HYB 1.0 GPF B OUT URINAL
7539-RF-CP	TRIPPOINT HYBRID 1.0 GPF BLOW OUT URINAL RETROFIT	10UH00K30-RF-CP	MACH TRIPOINT HYB 1.0 GPF B OUT URINAL RETROFIT
7542-CP	TRIPPOINT HYBRID 1.0 GPF WASH OUT URINAL	10UH00K20-CP	MACH TRIPOINT HYB 1.0 GPF W OUT URINAL
Did Not Exist	Did Not Exist	10TD00K10-CP	MACH TRIPOINT DC 1.0 GPF TOILET
10956-SV-CP	TRIPPOINT DC 1.28 GPF TOILET	10TD00N10-CP	MACH TRIPOINT DC 1.28 GPF TOILET
10956-RF-CP	TRIPPOINT DC 1.28 GPF TOILET RETROFIT	10TD00N10-RF-CP	MACH TRIPOINT DC 1.28 GPF TOILET RETROFIT
10957-SV-CP	TRIPPOINT DC 1.60 GPF TOILET	10TD00R10-CP	MACH TRIPOINT DC 1.60 GPF TOILET
10957-RF-CP	TRIPPOINT DC 1.60 GPF TOILET RETROFIT	10TD00R10-RF-CP	MACH TRIPOINT DC 1.60 GPF TOILET RETROFIT
10949-SV-CP	TRIPPOINT DC 0.125 GPF URINAL	10UD00D20-CP	MACH TRIPOINT DC 0.125 GPF URINAL
10958-SV-CP	TRIPPOINT DC 0.5 GPF URINAL	10UD00G20-CP	MACH TRIPOINT DC 0.5 GPF URINAL
10960-SV-CP	TRIPPOINT DC 1.0 GPF URINAL	10UD00K20-CP	MACH TRIPOINT DC 1.0 GPF URINAL
Did Not Exist	Did Not Exist	40TH00K10-CP	MACH WAVE HYB 1.0 GPF TOILET
7521-CP	WAVE HYBRID 1.28 GPF TOILET	40TH00N10-CP	MACH WAVE HYB 1.28 GPF TOILET
7521-RF-CP	WAVE HYBRID 1.28 GPF TOILET RETROFIT	40TH00N10-RF-CP	MACH WAVE HYB 1.28 GPF TOILET RETROFIT
7523-CP	WAVE HYBRID 1.6 GPF TOILET	40TH00R10-CP	MACH WAVE HYB 1.6 GPF TOILET
7523-RF-CP	WAVE HYBRID 1.6 GPF TOILET RETROFIT	40TH00R10-RF-CP	MACH WAVE HYB 1.6 GPF TOILET RETROFIT
7559-CP	WAVE HYBRID 3.5 GPF TOILET	40TH00V10-CP	MACH WAVE HYB 3.5 GPF TOILET
7528-CP	WAVE HYBRID 0.125 GPF URINAL	40UH00D20-CP	MACH WAVE HYB 0.125 GPF URINAL
7528-RF-CP	WAVE HYBRID 0.125 GPF URINAL RETROFIT	40UH00D20-RF-CP	MACH WAVE HYB 0.125 GPF URINAL RETROFIT
7526-CP	WAVE HYBRID 0.5 GPF URINAL	40UH00G20-CP	MACH WAVE HYB 0.5 GPF URINAL
7526-RF-CP	WAVE HYBRID 0.5 GPF URINAL RETROFIT	40UH00G20-RF-CP	MACH WAVE HYB 0.5 GPF URINAL RETROFIT
7527-CP	WAVE HYBRID 1.0 GPF URINAL	40UH00K20-CP	MACH WAVE HYB 1.0 GPF URINAL
7527-RF-CP	WAVE HYBRID 1.0 GPF URINAL RETROFIT	40UH00K20-RF-CP	MACH WAVE HYB 1.0 GPF URINAL RETROFIT
Did Not Exist	Did Not Exist	40TD00K10-CP	MACH WAVE DC 1.0 GPF TOILET
10673-SV-CP	WAVE DC 1.28 GPF TOILET	40TD00N10-CP	MACH WAVE DC 1.28 GPF TOILET
10673-RF-CP	WAVE DC 1.28 GPF TOILET RETROFIT	40TD00N10-RF-CP	MACH WAVE DC 1.28 GPF TOILET RETROFIT
10674-SV-CP	WAVE DC 1.6 GPF TOILET	40TD00R10-CP	MACH WAVE DC 1.6 GPF TOILET
10674-RF-CP	WAVE DC 1.6 GPF TOILET RETROFIT	40TD00R10-RF-CP	MACH WAVE DC 1.6 GPF TOILET RETROFIT
10668-SV-CP	WAVE DC 0.125 GPF URINAL	40UD00D20-CP	MACH WAVE DC 0.125 GPF URINAL
10675-SV-CP	WAVE DC 0.5 GPF URINAL	40UD00G20-CP	MACH WAVE DC 0.5 GPF URINAL
10676-SV-CP	WAVE DC 1.0 GPF URINAL	40UD00K20-CP	MACH WAVE DC 1.0 GPF URINAL



Primme™ Manual Flushometers

Primme is a new alternative to KOHLER® manual flushometers for price-sensitive projects. Its brass body and reliable piston technology will give you the performance and durability you need in your projects. KOHLER manual flushometers are easy to install, suitable for retrofit and can help conserve water.

Engineered for optimal performance with KOHLER toilets and urinals

Durable cast-brass construction

Includes vacuum breaker and control stop

Reliable piston valve technology with self-cleaning and anti-clogging features

Nonhold-open handle

Chloramine-resistant materials eliminate the need for frequent maintenance or repairs



Primme Manual Toilet Flushometer



Primme Manual Urinal Flushometer



Lasting Finish
Resists corrosion & wear

SKU	Description	Installation Type	Flush Rate (gallons per flush)	Watersense	ADA	Colors
K-76317	Primme Manual Flushometer	Urinal	0.125	•	•	CP
K-76318			0.5	•	•	CP
K-76319			1.0		•	CP
K-76321		Toilet	1.28	•	•	CP
K-76322			1.6		•	CP



Products labeled ADA or ADA-compliant will comply with the Americans with Disabilities Act, when installed per the requirements of the 2010 ADA Standards for Accessible Design.



WaterSense®-labeled urinals use at least 50% less water than standard 1.0-gallon urinals while still meeting strict flushing performance guidelines.

WaterSense®-labeled toilets use at least 20% less water than standard 1.6-gallon toilets while still meeting strict flushing performance guidelines.

Codes/Standards
ASSE 1037/ASME A112.1037/CSA B125.37
ADA
ICC/ANSI A117.1
CSA B651
OBC
IAPMO Certification



Polished
Chrome
(CP)

TOILET & FLUSHOMETER COMPATIBILITY CHART	FIXTURE DESCRIPTION	FLOOR MOUNT														WALL MOUNT			
		Top Spud								Rear Spud						Top Spud		Rear Spud	
		Anglesey Rear Outlet, ADA 1.28 or 1.6 GPF	Anglesey Rear Outlet 1.6 GPF	Anglesey Rear Outlet w/Int Seat 1.6 GPF	Highcliff Ultra Floor Outlet, ADA 1.0-1.6 GPF	Wellcomme Ultra Floor Outlet 1.0-1.6 GPF	Modflex Rear Outlet, ADA 1.28 or 1.6 GPF	Juvenile Ultra Floor Outlet, ADA 1.0-1.6 GPF	Primary Floor Outlet, ADA 1.28 or 1.6 GPF	Anglesey Rear Outlet 1.6 GPF	Anglesey Rear Outlet w/Int Seat 1.6 GPF	Highcliff Ultra Floor Outlet, ADA 1.28-1.6 GPF	Wellcomme Ultra Floor Outlet 1.28-1.6 GPF	Modflex Rear Outlet, ADA 1.28 or 1.6 GPF	Kingston Ultra Rear Outlet, ADA 1.0-1.6 GPF (4 bolt)	Kingston Rear Outlet, ADA 1.28-1.6 GPF (3 bolt)	Kingston Ultra Rear Outlet, ADA 1.1-1.6 GPF (4 bolt)	Kingston Rear Outlet, ADA 1.28-1.6 GPF (3 bolt)	
	FIXTURE SKU	K-4352	K-4386	K-4388	K-96057	K-96053	K-25042-SS	K-96059	K-96064	K-4396	K-4398	K-96058	K-96054	K-25044-SS	K-84325	K-84434	K-84323	K-84454	
FLUSHOMETER DESCRIPTION	FLUSHOMETER SKU																		
Primme 1.28 GPF	K-76321	•	•		•	•	•	•	•						•	•			
Primme 1.6 GPF	K-76322	•	•	•	•	•	•	•	•						•	•			
Mach Manual 1.0 GPF	K-80TM00K10				•	•		•							•				
Mach Manual 1.28 GPF	K-80TM00N10	•	•	•	•	•	•	•	•						•	•			
Mach Manual 1.6 GPF	K-80TM00R10	•	•	•	•	•	•	•	•						•	•			
Mach Tripoint DC 1.0 GPF	K-10TD00K10				•	•		•							•				
Mach Tripoint DC 1.28 GPF	K-10TD00N10	•			•	•	•	•	•						•	•			
Mach Tripoint DC 1.28 GPF Retrofit	K-10TD00N10-RF	•			•	•	•	•	•						•	•			
Mach Tripoint DC 1.6 GPF	K-10TD00R10	•	•	•	•	•	•	•	•						•	•			
Mach Tripoint DC 1.6 GPF Retrofit	K-10TD00R10-RF	•	•	•	•	•	•	•	•						•	•			
Mach Tripoint Hybrid 1.0 GPF	K-10TH00K10				•	•		•							•				
Mach Tripoint Hybrid 1.28 GPF	K-10TH00N10	•			•	•	•	•	•						•	•			
Mach Tripoint Hybrid 1.28 GPF Retrofit	K-10TH00N10-RF	•			•	•	•	•	•						•	•			
Mach Tripoint Hybrid 1.6 GPF	K-10TH00R10	•	•	•	•	•	•	•	•						•	•			
Mach Tripoint Hybrid 1.6 GPF Retrofit	K-10TH00R10-RF	•	•	•	•	•	•	•	•						•	•			
Mach Wave DC 1.0 GPF	K-40TD00K10				•	•		•							•				
Mach Wave DC 1.28	K-40TD00N10	•			•	•	•	•	•						•	•			
Mach Wave DC 1.28 GPF Retrofit	K-40TD00N10-RF	•			•	•	•	•	•						•	•			
Mach Wave DC 1.6 GPF	K-40TD00R10	•	•	•	•	•	•	•	•						•	•			
Mach Wave DC 1.6 GPF Retrofit	K-40TD00R10-RF	•	•	•	•	•	•	•	•						•	•			
Mach Wave Hybrid 1.0 GPF	K-40TH00K10				•	•		•							•				
Mach Wave Hybrid 1.28 GPF	K-40TH00N10	•			•	•	•	•	•						•	•			
Mach Wave Hybrid 1.28 GPF Retrofit	K-40TH00N10-RF	•			•	•	•	•	•						•	•			
Mach Wave Hybrid 1.6 GPF	K-40TH00R10	•	•	•	•	•	•	•	•						•	•			
Mach Wave Hybrid 1.6 GPF Retrofit	K-40TH00R10-RF	•	•	•	•	•	•	•	•						•	•			
Mach Wave Hybrid 3.5 GPF	K-40TH00V10																		

URINAL & FLUSHOMETER COMPATIBILITY CHART	FIXTURE DESCRIPTION	WALL MOUNT														FLOOR MOUNT	
		Top Spud							Rear Spud							Top Spud	Rear Spud
		Bardon Washdown Urinal, ADA 0.125-1.0 GPF	Tend Compact Washout Urinal, ADA 0.125-1.0 GPF	Dexter Siphon Jet Urinal, ADA 0.5-1.0 GPF	Dexter Washdown Urinal, ADA 0.125 GPF	Freshman Siphon Jet Urinal 1.0 GPF	Stanwell Blowout Urinal, ADA 0.5-1.0 GPF	Steward Hybrid Washout Urinal, ADA 0.125 GPF	Bardon Washdown Urinal, ADA 0.125-1.0 GPF	Tend Compact Washout Urinal, ADA 0.125-1.0 GPF	Dexter Siphon Jet Urinal, ADA 0.5-1.0 GPF	Dexter Washdown Urinal, ADA 0.125 GPF	Freshman Siphon Jet Urinal 1.0 GPF	Steward Hybrid Washout Urinal, ADA 0.125 GPF	Branham Full Stall Washdown, ADA 0.5-1.0 GPF	Branham Full Stall Washdown, ADA 0.5-1.0 GPF	
	K-4991-ET	K-20713-ET	K-5016-ET	K-5452-ET	K-4989-T	K-25048-ET	K-5244-ET	K-4991-ER	K-20713-ER	K-5016-ER	K-5452-ER	K-4989-R	K-5244-ER	K-25039-T	K-25039-R		
FLUSHOMETER DESCRIPTION	FLUSHOMETER SKU																
Primme 0.125 GPF	K-76317	•	•		•			•									
Primme 0.5 GPF	K-76318	•	•	•			•							•			
Primme 1.0 GPF	K-76319	•	•	•		•	•							•			
Mach Manual 0.125 GPF	K-80UM00D20	•	•		•			•									
Mach Manual 0.5 GPF	K-80UM00G20	•	•	•			•							•			
Mach Tripoint DC 0.125 GPF	K-10UD00D20	•	•		•			•									
Mach Tripoint DC 0.5 GPF	K-10UD00G20	•	•	•			•							•			
Mach Tripoint DC 1.0 GPF	K-10UD00K20	•	•	•		•	•							•			
Mach Tripoint Hybrid 0.125 GPF	K-10UH00D20	•	•		•			•									
Mach Tripoint Hybrid 0.125 GPF Retrofit	K-10UH00D20-RF	•	•		•			•									
Mach Tripoint Hybrid 0.5 GPF	K-10UH00G20	•	•	•			•							•			
Mach Tripoint Hybrid 0.5 GPF Retrofit	K-10UH00G20-RF	•	•	•			•							•			
Mach Tripoint Hybrid 1.0 GPF Washout	K-10UH00K20	•	•	•		•								•			
Mach Wave DC 0.125 GPF	K-40UD00D20	•	•		•			•									
Mach Wave DC 0.5 GPF	K-40UD00G20	•	•	•			•							•			
Mach Wave DC 1.0 GPF	K-40UD00K20	•	•	•		•	•							•			
Mach Wave Hybrid 0.125 GPF	K-40UH00D20	•	•		•			•									
Mach Wave Hybrid 0.125 GPF Retrofit	K-40UH00D20-RF	•	•		•			•									
Mach Wave Hybrid 0.5 GPF	K-40UH00G20	•	•	•			•							•			
Mach Wave Hybrid 0.5 GPF Retrofit	K-40UH00G20-RF	•	•	•			•							•			
Mach Wave Hybrid 1.0 GPF	K-40UH00K20	•	•	•		•	•							•			
Mach Wave Hybrid 1.0 GPF Retrofit	K-40UH00K20-RF	•	•	•		•	•							•			



COMMERCIAL TOILETS & TOILET SEATS

Kohler is an established leader in commercial toilet bowls, but we keep innovating. Designed to flush from 1.0 to 1.6 gpf, our Ultra bowls have set a new standard for flushing performance. Our robust design tolerates the variety of water supply conditions found on remodel and new construction sites. Our toilet bowls pair seamlessly with our seats for a winning combination of durability and performance. Another improvement is Kohler's antimicrobial finish that's applied to select commercial fixtures. It inhibits the growth of stains and odors, and the EPA-registered material is baked right on to the finish, providing a smooth and safe surface.



Ultra Flush Engine

The new standard for flushing performance

THE BOLD LOOK
OF **KOHLER**

Ultra Flush Engine

Kohler is an established leader in commercial toilet bowls, but that doesn't stop us from continually innovating. We've incorporated the Ultra flushing engine, which represents a breakthrough in flush performance.

As much as a 1.0 gpf - 1.6 gpf flush range, allowing for a more environmentally friendly product that also eases inventory by having one SKU to support varying flush rates.

Engineered to flush effectively at low water pressure and flow rates.

Eliminates gas leaks, splashing and shredding.

Designed to outperform competitors in bowl cleanliness, plug resistance and toilet seat cover removal.



Product Family	SKU	Installation Type	Spud Location	Flush Range	Bedpan Lugs	Antimicrobial*	ADA	Color
Kingston Ultra	K-84325	Wall-mount	Top Spud	1.0-1.6 GPF			•	0, 7, 96
	K-84325-L	Wall-mount	Top Spud	1.0-1.6 GPF	•		•	0
	K-84325-SS	Wall-mount	Top Spud	1.0-1.6 GPF		•	•	0
	K-84325-SSL	Wall-mount	Top Spud	1.0-1.6 GPF	•	•	•	0
	K-84323	Wall-mount	Rear Spud	1.1-1.6 GPF			•	0, 7, 96
	K-84323-L	Wall-mount	Rear Spud	1.1-1.6 GPF	•		•	0
	K-84323-SS	Wall-mount	Rear Spud	1.1-1.6 GPF		•	•	0
Highcliff Ultra	K-96057	Floor-mount	Top Spud	1.0-1.6 GPF			•	0, 7, 96
	K-96057-L	Floor-mount	Top Spud	1.0-1.6 GPF	•		•	0, 7
	K-96057-SS	Floor-mount	Top Spud	1.0-1.6 GPF		•	•	0
	K-96057-SSL	Floor-mount	Top Spud	1.0-1.6 GPF	•	•	•	0
	K-96058	Floor-mount	Rear Spud	1.28-1.6 GPF			•	0, 7, 96
	K-96058-L	Floor-mount	Rear Spud	1.28-1.6 GPF	•		•	0
	K-96058-SS	Floor-mount	Rear Spud	1.28-1.6 GPF		•	•	0
Wellcomme Ultra	K-96058-SSL	Floor-mount	Rear Spud	1.28-1.6 GPF	•	•	•	0
	K-96053	Floor-mount	Top Spud	1.0-1.6 GPF				0, 7, 96
	K-96053-L	Floor-mount	Top Spud	1.0-1.6 GPF	•			0, 7
	K-96053-SS	Floor-mount	Top Spud	1.0-1.6 GPF		•		0
	K-96053-SSL	Floor-mount	Top Spud	1.0-1.6 GPF	•	•		0
Juvenile Ultra	K-96054	Floor-mount	Rear Spud	1.28-1.6 GPF				0
	K-96054-SS	Floor-mount	Rear Spud	1.28-1.6 GPF		•		0
	K-96059	Floor-mount	Top Spud	1.0-1.6 GPF			•	0
	K-96059-SS	Floor-mount	Top Spud	1.0-1.6 GPF		•	•	0




WaterSense®-labeled toilets use at least 20% less water than standard 1.6-gallon toilets while still meeting strict flushing performance guidelines.




Products labeled ADA or ADA-compliant will comply with the Americans with Disabilities Act, when installed per the requirements of the 2010 ADA Standards for Accessible Design.

*An antimicrobial agent is baked into the glaze and protects the fixture from the growth of stain- and odor-causing bacteria. This product does not protect users against bacteria, viruses or other disease organisms. Always clean and wash this product thoroughly before and after each use.



ADDITIONAL FLUSHOMETER TYPE TOILETS

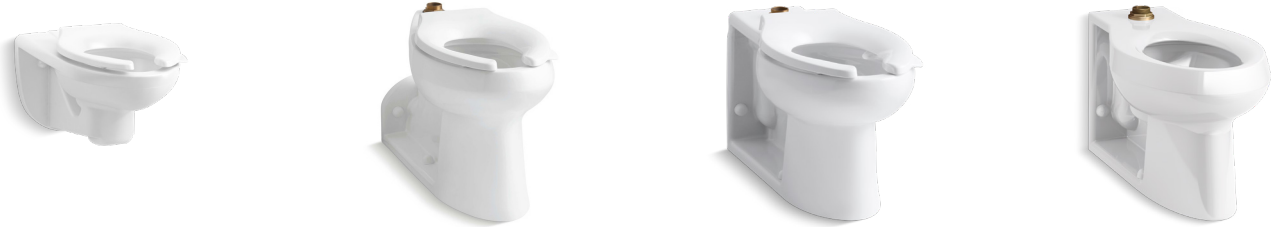							
Kingston™ Wall mount elongated, 3-bolt installation, 1.28 or 1.6 gpf		Angleseley™ Comfort Height Elongated with rear outlet, 1.28 or 1.6 gpf		Angleseley Elongated with rear outlet and angle back, 1.6 gpf		Angleseley With Integral Seat* Elongated with integral seat, 1.6 gpf	
Top spud	K-84434	Top spud	K-4352	Top spud (shown)	K-4386	Top spud (shown)	K-4388
Rear Spud	K-84454			Rear spud	K-4396	Rear spud	K-4398

								
Primary™ Elongated with open-front seat; sized for prekindergarten applications. For K-3 grades, please see Juvenile Ultra K-96059 1.28–1.6 gpf top spud K-96064								
Product Family	SKU	Top Spud	Rear Spud	Flushrate	Bedpan Lugs	Antimicrobial	ADA	Color
Kington 3-bolt	K-84434	•		1.28 ,1.6 GPF			•	0, 7
	K-84454		•	1.28 ,1.6 GPF			•	0
Angleseley Rear Outlet	K-4352	•		1.28 ,1.6 GPF			•	0
	K-4352-L	•		1.28 ,1.6 GPF	•		•	0
	K-4352-SS	•		1.28 ,1.6 GPF		•	•	0
	K-4352-SSL	•		1.28 ,1.6 GPF	•	•	•	0
	K-4386	•		1.6 GPF				0
	K-4386-L	•		1.6 GPF	•			0
	K-4386-SS	•		1.6 GPF		•		0
	K-4396		•	1.6 GPF				0
Angleseley Rear Outlet Integral Seat	K-4388	•		1.6 GPF				0
	K-4398		•	1.6 GPF				0
	K-4398-SS		•	1.6 GPF		•		0
Primary	K-96064	•		1.28 ,1.6 GPF			•	0
	K-96064-SS	•		1.28 ,1.6 GPF		•	•	0

PRESSURE ASSISTED TOILETS

							
Wellworth® Classic Elongated with Pressure Lite technology		Highline® Classic Comfort Height Elongated with Pressure Lite technology		Barrington™ Comfort Height Elongated with rear outlet and Pressure Lite technology		Barrington Elongated with rear outlet and Pressure Lite technology	
1.0 gpf (shown) 1.6 gpf	K-3531 K-3505	1.0 gpf (shown) 1.6 gpf	K-3519 K-3493	1.0 gpf	K-3578	1.0 gpf (shown) 1.6 gpm	K-3652 K-3554

Product Family	SKU	Tank Sku	Bowl Sku	Flushrate	Trip Lever	Tank Cover Locks	ADA	Antimicrobial	Color
Wellworth Classic	K-3505	K-4645	K-4303	1.6 GPF	Left-hand				0, 7, 96
	K-3505-RA	K-4645-RA	K-4303	1.6 GPF	Right Hand				0, 7, 96
	K-3505-T	K-4645-T	K-4303	1.6 GPF	Left-hand	•			0
	K-3505-TR	K-4645-TR	K-4303	1.6 GPF	Right Hand	•			0
	K-3505-SS	K-4645	K-4303-SS	1.6 GPF	Left-hand			•	0
	K-3531	K-4484	K-4303	1.0 GPF	Left-hand				0, 7, 96
	K-3531-RA	K-4484-RA	K-4303	1.0 GPF	Right Hand				0, 7, 96
	K-3531-T	K-4484-T	K-4303	1.0 GPF	Left-hand	•			0
Highline Classic	K-3531-TR	K-4484-TR	K-4303	1.0 GPF	Right Hand	•			0
	K-3519	K-4484	K-4304	1.0 GPF	Left-hand		•		0, 7, 96
	K-3519-RA	K-4484-RA	K-4304	1.0 GPF	Right Hand		•		0, 7, 96
	K-3519-T	K-4484-T	K-4304	1.0 GPF	Left-hand	•	•		0
	K-3519-TR	K-4484-TR	K-4304	1.0 GPF	Right Hand	•	•		0
	K-3493	K-4645	K-4304	1.6 GPF	Left-hand		•		0, 7, 96
	K-3493-RA	K-4645-RA	K-4304	1.6 GPF	Right Hand		•		0, 7, 96
	K-3493-T	K-4645-T	K-4304	1.6 GPF	Left-hand	•	•		0
Barrington Rear Outlet	K-3493-TR	K-4645-TR	K-4304	1.6 GPF	Right Hand	•	•		0
	K-3493-SS	K-4645	K-4304-SS	1.6 GPF	Left-hand		•	•	0
	K-3578	K-4484	K-4305	1.0 GPF	Left-hand		•		0, 7, 96
	K-3578-RA	K-4484-RA	K-4305	1.0 GPF	Right Hand		•		0, 7, 96
	K-3578-T	K-4484-T	K-4305	1.0 GPF	Left-hand	•	•		0
	K-3578-SS	K-4484	K-4305-SS	1.0 GPF	Left-hand		•	•	0
	K-3652	K-4484	K-4327	1.0 GPF	Left-hand				0, 7, 96
	K-3652-RA	K-4484-RA	K-4327	1.0 GPF	Right Hand				0, 7, 96
	K-3652-T	K-4484-T	K-4327	1.0 GPF	Left-hand	•			0
	K-3652-SS	K-4484	K-4327-SS	1.0 GPF	Left-hand			•	0
	K-3554	K-4645	K-4327	1.6 GPF	Left-hand				0, 7, 96
	K-3554-RA	K-4645-RA	K-4327	1.6 GPF	Right Hand				0, 7, 96
	K-3554-T	K-4645-T	K-4327	1.6 GPF	Left-hand	•			0



Modflex Adjust-a-Bowl Toilet
K-25042-SS-0
Mach® WAVE Touchless Flushometer
K-40TH00N10-CP

Modflex® Adjust-a-Bowl® Toilet

Floor-mount toilet with wall-mount installation for conversions or new construction

THE BOLD LOOK
OF **KOHLER**®

Perfect For:
Healthcare • Nursing Home • Education • Public Spaces • Hospitality



15" – 18" rim height range

Simpler Conversion

The Modflex® Adjust-a-Bowl® toilet bowl is the first of its kind to offer an economical and attractive way to convert a wall-mount toilet to a floor-mount toilet. In addition to saving up to thousands of dollars per conversion, the Modflex Adjust-a-Bowl toilet increases weight load support permanently without sacrificing cleanliness, like braces and weight load support tools currently on the market. The Modflex Adjust-a-Bowl toilet employs a bracket system that can adjust to accommodate a bowl rim height variation from 15" to 18".

Lower Life Cycle Environmental Impact

The Modflex® Adjust-a-Bowl® toilet was developed with insights gained from Kohler’s Design for Environment (DfE) process, which considers a product’s entire life cycle in order to reduce its overall environmental impact without compromising performance or quality.

With a third-party-verified Environmental Product Declaration (EPD) attesting to its environmental impacts, the Modflex Adjust-a-Bowl toilet can contribute to Material and Resources

credits in new construction applications seeking Leadership in Energy and Environmental Design (LEED) certification. When used with high-efficiency flushometers, the Modflex Adjust-a-Bowl toilet can also help in contributing to Water Efficiency credits, making it that much easier for projects to be transparent about their environmental impact. The Modflex Adjust-a-Bowl toilet also uses glass-filled polypropylene to avoid the use of PVC which is on the ILFI Red List.

Increases load support

Rated to 2,500 pounds compared to 500–1,000 pounds for wall-mount toilet.

Healthcare friendly

ADA-height bowl and weight capacity suitable for bariatric patients.

Easy to clean

Smooth sides and low-profile bolt caps reduce cleaning time and the potential for missed areas.

Versatile

Replaces wall-mount bowls installed at standard or ADA height.

Minimizes downtime

Reduces conversion time from days to hours, saving up to \$5,000 per room.

Adaptable

Suitable for existing and new construction.


Economical

Fast, easy installation reduces lost revenue from an out-of-service room.


Style compatibility

Pairs perfectly with KOHLER® 1.28 or 1.6 gpf flushometers and toilet seats.


Installation

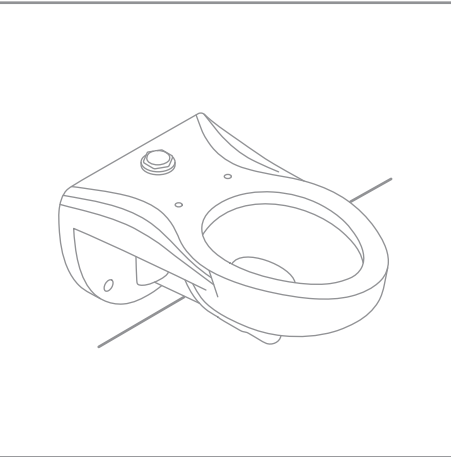

STEP 1 Shut off water supply and remove wall-mount toilet from wall.

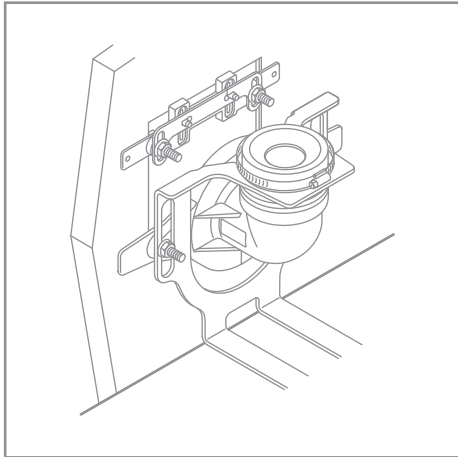

STEP 2 Install bracket and connector system to existing carrier in wall.

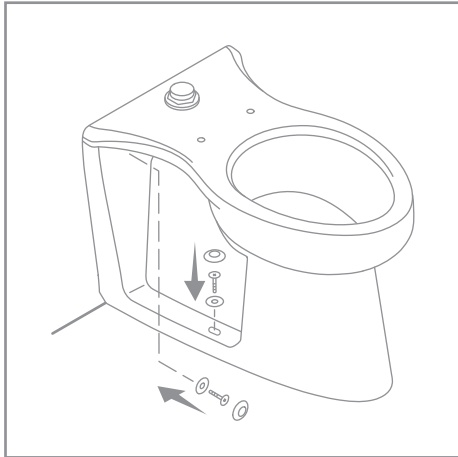

STEP 3 Place bowl onto connector system and secure in place.

Please reference installation guide on KOHLER.com for complete installation instructions.


Modflex® Adjust-a-Bowl® Toilet

New construction versatility

Placing an ADA toilet near a vertical plumbing stack is a common construction challenge. Because ADA toilets can normally have higher outlet heights compared to standard toilets, they are traditionally placed furthest away from the vertical stack. The flexibility of the Modflex Adjust-a-Bowl toilet bracket system allows for a lower outlet height, making it possible to position the toilet in closer proximity to a vertical stack.

Adapting to design changes

A lot can happen throughout the design and construction phases of a project. A project might be in its final design phases, with the entire plumbing system designed to use wall-mount toilets. In situations like this, the Modflex Adjust-a-Bowl toilet is a great solution that can save in cost overruns and logistical challenges.

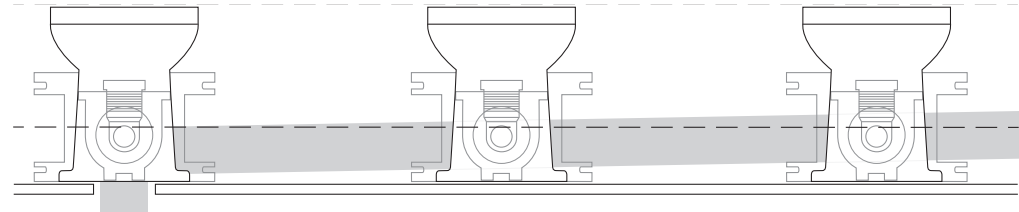

The Modflex Adjust-a-Bowl toilet works with a pitched drainline and can be installed anywhere along the run.

Product Number	Antimicrobial	Bedpan Lugs	Spud Location	ADA-Compliant	Colors
K-25042-SS	•		Top	•	0, 96
K-25042-SSL	•	•	Top	•	0, 96
K-25044-SS	•		Rear	•	0, 96
K-25044-SSL	•	•	Rear	•	0, 96

ADA Products labeled ADA or ADA-compliant will comply with the Americans with Disabilities Act, when installed per the requirements of the 2010 ADA Standards for Accessible Design.



WaterSense®-labeled toilets use at least 20% less water than standard 1.6-gallon toilets while still meeting strict performance guidelines.





White (0)



Biscuit (96)

Codes/Standards:
ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC
IAPMO Certification

Modflex Adjust-a-bowl Installation System

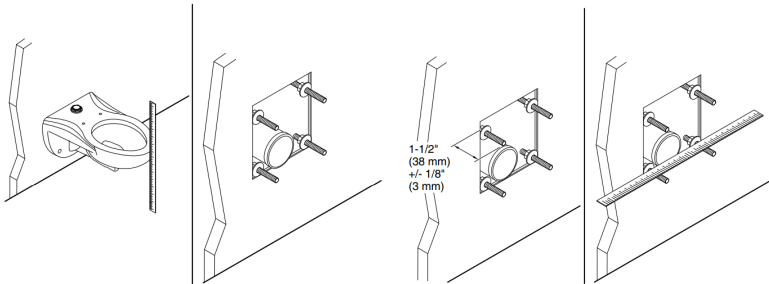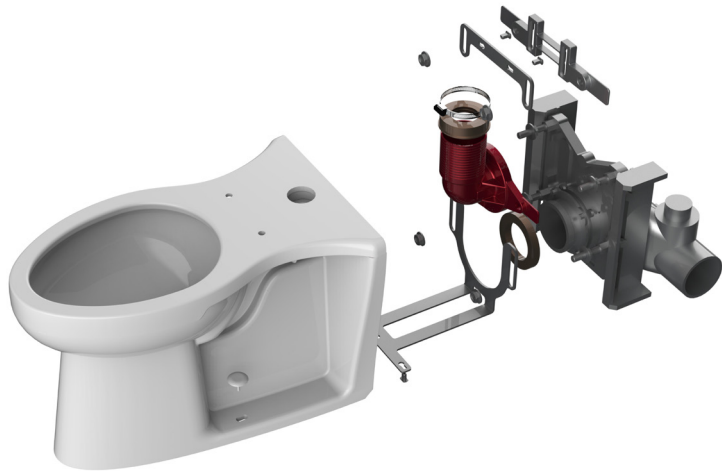


1. Remove the Bowl

- Remove the flushometer and toilet seat from the existing wall bowl.
 - Record the height from the finished floor to the rim of the existing wall bowl.
- NOTE:** You will need this measurement for future installation steps.
- Remove the wall bowl.
 - If needed, temporarily plug the drain outlet with a rag.

2. Prepare for Installation

- NOTE:** Replace the drain outlet (not provided) if the outlet to carrier seal is disrupted.
- Position or cut the bolt lengths of the carrier to be 1-1/2" (38 mm) +/- 1/8" (3 mm) from the finished wall.
 - Use a straight edge to verify that the drain outlet and washers are flush with the finished wall.

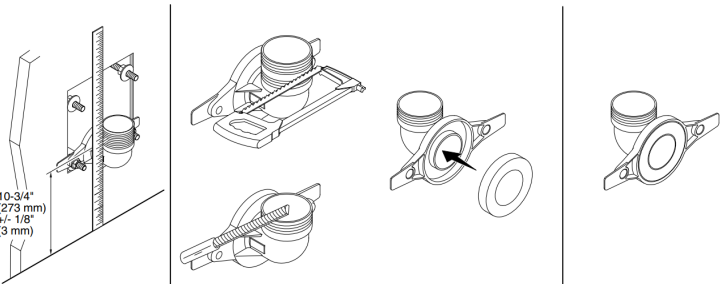


3. Prepare the Connector

- Temporarily install the plastic connector onto the lower two bolts of the wall carrier.
- Make a mark on the connector 10-3/4" (273 mm) +/- 1/8" (3 mm) from the floor.
- Remove the connector from the wall carrier.
- Use painters tape to mark the height on the nearest vee-groove all around the connector.
- Cut the connector at the nearest vee-groove from the marked height.
- Deburr the inside and outside of the connector's cut edge.

4. Prepare the Connector (cont.)

- Install a neoprene wall gasket (not provided) onto the back of the connector.
- Set the connector aside.

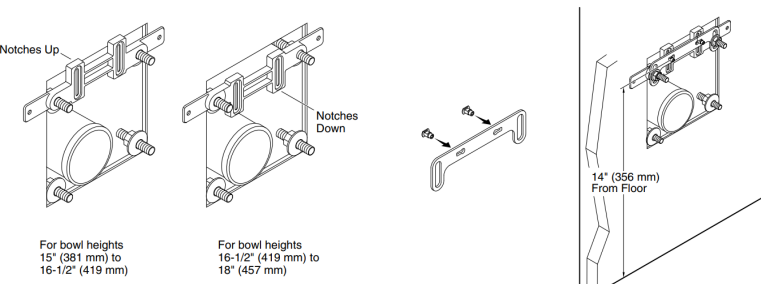


5. Install the Spacer

- Install the spacer to the top wall carrier bolts according to the bowl height recorded in the "Remove the Bowl" section.
- For bowl heights 15" (381 mm) to 16-1/2" (419 mm):** Install the spacer onto the wall carrier bolts with the notches facing up.
- For bowl heights 16-1/2" (419 mm) to 18" (457 mm):** Install the spacer onto the wall carrier bolts with the notches facing down.

6. Install the Upper Bracket

- Insert two tee nuts (provided) into the upper metal bracket.
- Install the upper metal bracket onto the wall carrier studs with the height of the tee nuts 14" (356 mm) from the floor.
- Tighten the upper metal bracket and spacer to the wall carrier using the low profile nuts and washers (provided).

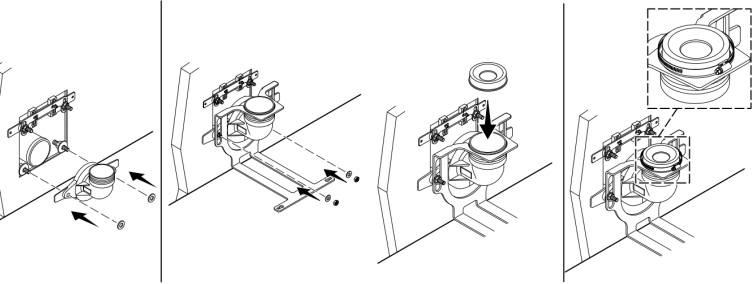


7. Install the Connector and Lower Bracket

- Slide the connector and washers onto the bottom wall carrier bolts.
- Insert two tee nuts into the lower metal bracket.
- Install the lower metal bracket onto the bottom wall carrier bolts.
- Secure the connector and lower metal bracket to the wall carrier bolts using the low profile nuts and washers (provided).
- Attach the front of the metal bracket to the floor using a lag screw or expansion bolt (optional).

8. Install the Gasket

- Install the rubber gasket onto the connector. Verify that it is completely pushed onto the connector.
- Install and tighten the hose clamp around the rubber gasket.
- Verify that the hose clamp nut is positioned at the front of the gasket.

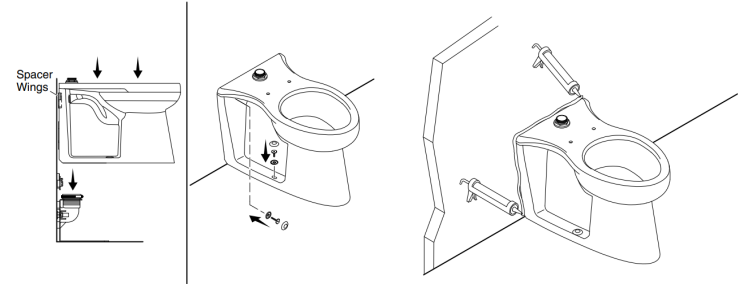

9. Install the Bowl

- NOTE:** The back of the bowl should touch the wings of the upper plastic spacer and the plastic connector.
- NOTE:** If the baseboard molding is thicker than 1/8" (3 mm), it may need to be cut to allow the bowl to engage the plastic spacer wings.
- Lubricate the top of the connector gasket with silicone plumber's grease.
 - Position the toilet over the connector and guide it down onto the gasket.
 - Verify that the back of the bowl is flush with the wings of the upper plastic spacer and the plastic connector.
- NOTE:** Use the longer screws for the wall, and shorter screws for the floor.
- Install the plastic washers, screws, and caps (provided).
 - Tighten the bolt cap screws and snap on the low-profile caps.

10. Check for Leaks

- NOTE:** The tailpiece length may need to be adjusted when reinstalling the flushometer.
- Reinstall the toilet seat and flushometer.
 - Turn on the water supply.
 - Check for leaks.
 - Caulk any spaces between the toilet and the wall.

Care and Cleaning

- WARNING: Risk of property or product damage.** Do not use in-tank cleaners in your toilet. Products containing chlorine (calcium hypochlorite) can seriously damage fittings in the tank. This damage can cause leakage and property damage.

Kohler Co. shall not be responsible or liable for any tank fitting damage caused by the use of cleaners containing chlorine (calcium hypochlorite).

ADA height
floor bowl

Smooth sides that
hide all brackets and
connectors

Easy to clean Low
Profile Bolt Caps

Notched corner for
molding relief

Supports static load of
2500 lbs

Footprint covers old
wall mount footprint

Reuse of existing wall
carrier

Simple height
adjustability
(can replace a 15"-18"
rim height wall bowl)

Assembled



Exploded





Kingston™ 2-Piece Gravity-fed Toilet

Leading-edge performance and everyday low price for commercial and hospitality projects

THE BOLD LOOK
OF KOHLER.

Kingston 2 Piece Gravity-fed Toilet

Designed for commercial and hospitality applications big and small, the Kingston 2-piece commercial toilet provides uncompromising performance with ease of cleaning and maintenance at an everyday low price.

BOLD PERFORMANCE AND DESIGN

- Canister flush and Class Five ®flushing technology offer virtually plug plug-free performance and rinsing power for a clean bowl
- 1.28 GPF meets strict EPA flushing guidelines
- FullyFully-glazed trapway
- Fluidmaster 400A Fill Valve
- KOHLER ®Comfort Height ®option meets ADA standards

EASY INSTALLATION

- 3-Bolt Quick Connect Installation
- Standard 12 12-inch rough rough-in

EASY MAINTENANCE

- Silicone seal is easy to service
- Sanitary guard where the bowl and tank meet for ease of cleaning
- Metal trip lever provides durability
- Encapsulated bolts to prevent rusting and corrosion



SKU	Tank Sku	Bowl Sku	Flushrate	Trip Lever	Bowl Shape	Tank Cover Locks	ADA	Antimicrobial*
K-26077-0	Includes Tank, Bowl and Brevia Closed-Front Seat, Wax ring and hardware		1.28 GPF	Left-hand	Elongated		•	
K-25077-0	K-25100-0	K-25076-0		Left-hand	Elongated		•	
K-25077-RA-0	K-25100-RA-0	K-25076-0		Right-hand	Elongated		•	
K-25077-T-0	K-25100-T-0	K-25076-0		Left-hand	Elongated	•	•	
K-25077-TR-0	K-25100-TR-0	K-25076-0		Right-hand	Elongated	•	•	
K-25077-SS-0	K-25100-0	K-25076-SS-0		Left-hand	Elongated		•	•
K-25077-SSRA-0	K-25100-RA-0	K-25076-SS-0		Right-hand	Elongated		•	•
K-25077-SST-0	K-25100-T-0	K-25076-SS-0		Left-hand	Elongated	•	•	•
K-25077-SSTR-0	K-25100-TR-0	K-25076-SS-0		Right-hand	Elongated	•	•	•
K-25087-0	K-25100-0	K-25086-0		Left-hand	Elongated			
K-25087-RA-0	K-25100-RA-0	K-25086-0		Right-hand	Elongated			
K-25087-T-0	K-25100-T-0	K-25086-0		Left-hand	Elongated	•		
K-25087-TR-0	K-25100-TR-0	K-25086-0		Right-hand	Elongated	•		
K-25087-SS-0	K-25100-0	K-25086-SS-0		Left-hand	Elongated			•
K-25087-SSRA-0	K-25100-RA-0	K-25086-SS-0		Right-hand	Elongated			•
K-25087-SST-0	K-25100-T-0	K-25086-SS-0		Left-hand	Elongated	•		•
K-25087-SSTR-0	K-25100-TR-0	K-25086-SS-0		Right-hand	Elongated	•		•
K-25097-0	K-25100-0	K-25096-0		Left-hand	Round			
K-25097-RA-0	K-25100-RA-0	K-25096-0		Right-hand	Round			
K-25097-T-0	K-25100-T-0	K-25096-0		Left-hand	Round	•		
K-25097-TR-0	K-25100-TR-0	K-25096-0		Right-hand	Round	•		
K-25097-SS-0	K-25100-0	K-25096-SS-0		Left-hand	Round			•
K-25097-SSRA-0	K-25100-RA-0	K-25096-SS-0		Right-hand	Round			•
K-25097-SST-0	K-25100-T-0	K-25096-SS-0		Left-hand	Round	•		•
K-25097-SSTR-0	K-25100-TR-0	K-25096-SS-0		Right-hand	Round	•		•

*An antimicrobial agent is baked into the glaze and protects the fixture from the growth of stain- and odor-causing bacteria. This product does not protect users against bacteria, viruses or other disease organisms. Always clean and wash this product thoroughly before and after each use.



WaterSense®-labeled toilets use at least 20% less water than standard 1.6-gallon toilets while still meeting strict flushing performance guidelines.



Products labeled ADA or ADA-compliant will comply with the Americans with Disabilities Act, when installed per the requirements of the 2010 ADA Standards for Accessible Design.

White
(0)

TOILET SEATS



Stronghold®
Elongated

Open-front with integrated handle

K-4731



Lustra™
Open-front with check hinge

Elongated (shown)
Round-front

K-4670/K-4666
K-4680



Lustra™
Open-front with check hinge with 1" bumpers

Elongated (shown)

K-4679



Lustra
Round-front with seat cover

Open-front (shown)
Closed-front

K-4660
K-4662



Lustra
Elongated with seat cover

Open-front (shown)
Closed-front

K-4650
K-4652



Cachet
Elongated with seat cover, Closed-front seat

Quick Release
ReadyLatch, Quiet Close (shown)

K-7315
K-4636-RL



Border
ReadyLatch® Quiet-Close™ seat with antibacterial agent

Elongated (shown)
Round-front

K-24495-A
K-24494-A

Name	Model Number	Elongated	Round-Front	Open-Front	Includes/Features	Antimicrobial Agent Added to Protect Toilet Seat*	White 0	Dune NY	Bliscuit 96	Almond 47	Ice Grey 95	Sandbar G9	Cashmere K4	Thunder Grey 58	Black Black 7
Check Hinges															
Lustra	K-4666-C	•		•	Extra-heavy construction		•								
	K-4666-CA	•		•	Extra-heavy construction	•	•								
	K-4670-C	•		•			•								
	K-4670-CA	•		•		•	•								
	K-4679-CA	•		•	1" bumpers	•	•								
	K-4680-C		•	•			•								
Stronghold	K-4731-C	•		•	Integrated handle		•		•						•
	K-4731-CA	•		•	Integrated handle	•	•								
	K-4731-GC	•		•	Integrated handle, Quiet-Close technology		•								
Plastic Hinges															
Lustra	K-4650	•		•	Cover		•		•						•
	K-4650-A	•		•	Cover	•	•								
	K-4652†	•			Cover, Quick-Attach hardware, Quick-Release functionality		•		•					•	•
	K-4652-A	•			Cover, Quick-Attach hardware, Quick-Release functionality	•	•								
	K-4660		•	•	Cover		•								
	K-4662†		•		Cover, Quick-Attach hardware, Quick-Release functionality		•		•	•		•		•	
Border	K-24495-A	•			ReadyLatch, Quiet Close	•	•		•						
	K-24494-A		•		ReadyLatch, Quiet Close	•	•		•						
Self-Sustaining Check Hinges															
Lustra	K-4670-SA	•		•		•	•								
	K-4670-SC	•		•			•								
Stronghold	K-4731-SA	•		•	Integrated handle	•	•								
	K-4731-SC	•		•	Integrated handle		•		•						•
With Enhanced Functionality															
Cachet	K-7315	•			Cover, Grip-Tight bumpers, Quick-Attach hardware, Quick-Release functionality		•		•						
	K-4636-RL	•			Cover, Grip-Tight bumpers, ReadyLatch, Quiet-Close technology		•	•	•	•	•	•	•	•	•

* Includes an antimicrobial agent that protects the toilet seat from odor- and stain-causing bacteria, mold and mildew. **Antimicrobial agent does not protect the user from disease-causing bacteria.**
†Also available in Classic colors.



URINALS

We offer the right urinal for every commercial application. Sizes range from small footprint to full stall in washdown, siphon-jet and blowout flushing action. All of our urinals are precision-engineered to deliver maximum cleaning action at every flush interval from waterless all the way up to 1.0 gpf. Our patented back-wall design minimizes splash-back for a better user experience while smoothly contoured, fire-glazed surfaces are easy to keep clean.



Bardon Wall-hung rear-spud touchless urinal
K-32590-7

Bardon Touchless Urinal

Redesigned to deliver a **more cost effective solution** to customers. The Bardon Touchless Urinal with integrated flush valve provides the cleaner lines and look of a rear spud urinal with the easy valve access of a top spud.

Flexible Install & Maintenance

- Designed for high traffic restrooms, yet fully functional for man caves and other residential spaces too
- Fewer overall plumbing connections
- Includes ½” supply connection, making install easy for both commercial and residential applications.
- Tank cover and cover locks provide vandal protection.
- Powered by four easily replaced AA alkaline batteries, tested to last for approximately 7 years (at 137 uses/day).

Clean Space, Clean You

- Touchless valve utilizes an integrated sensor to drive a dependable flush.
- 0.5 gallon washout design fully rinses the urinal with each flush for a cleaner fixture.
- Patented backwall geometry and extended rim, limit splash-back for a cleaner restroom and user experience.
- Includes stainless low-profile strainer for faster drain flow



K-32590-0



SKU	Flush Rate (gallons per flush)	Power Source	Overall Dimensions	Wall to Rim Dimension	Rear Spud	Outlet	Colors
K-32590	0.5	4 x AA (Alkaline) Batteries included	18 ¹⁵ / ₁₆ " x 31 ¹ / ₈ "	14 ¹ / ₄ "	½"	2"	0, 7, 96




Products labeled ADA or ADA-compliant will comply with the Americans with Disabilities Act, when installed per the requirements of the 2010 ADA Standards for Accessible Design.



WaterSense®-labeled urinals use at least 50% less water than standard 1.0-gallon urinals while still meeting strict flushing performance guidelines.

Codes/Standards
ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense™
ADA
ICC/ANSI A117.1
CSA B651
OBC
IAPMO Certification

COLORS



Bardon Touchless Urinal

More for Less

THE BOLD LOOK
OF **KOHLER.**



Tend™ Urinal

Contemporary style, easy-to-clean design

THE BOLD LOOK
OF **KOHLER**®

Take a stand for better design

There's a lot to like about the Tend™ urinal, including its contemporary styling, easy installation, and a splash-minimizing design. Engineered with a focus on optimizing surface angles to reduce splash back, the Tend urinal offers ergonomic accommodation for users that traditional urinal designs simply can't match. Its innovative trapway-mounted installation system and low-maintenance design make it equally appealing to installers and custodians.

Modern aesthetic

- Sleek triangular shape, minimalist form, and concealed trapway enhance the style of any bathroom.

Splash-free design

- Interior surface angles and the extended, raised lip have been optimized to reduce the chance of splash back.

Innovative installation

- The urinal mounts to the trapway, eliminating the need for bolts and making the installation fast and easy.

Optimized ecosystem

- Pairing the Tend urinal with a KOHLER® flushometer simplifies the specification process and ensures foolproof compatibility and performance.

Full-coverage flush

- The innovative spreader generates wider rinsing coverage for a cleaner, fresher urinal.

Easy to clean

- Exceptionally smooth contours make it easy to clean.



Easy installation. Sleek, bolt-free look.

The innovative trapway holds the urinal in place, eliminating the need for bolts and reducing the overall installation time. The trapway can also be replaced, extending the life of the urinal.



Clean and confident

Conventional urinals have a propensity to create splash back, a frustrating experience that can result in unsightly spotting on the user’s clothing and shoes. Additionally, this problem can lead to a lack of cleanliness in the bathroom when users stand away from the urinal in order to avoid splash back, and the floor surrounding the urinal can become quite messy. With its raised and extended lip, the Tend™ urinal helps prevent both potential problems by allowing users to stand in close proximity to the urinal without fear of splash back.



Full-coverage flush

A thorough flush is critical to reducing odors and maintaining a clean and appealing environment. The Tend urinal’s spreader directs the water into a flattened, fan-shaped pattern, resulting in a thorough rinse with every flush.



Tend™ Urinal

Model Number	Antimicrobial Agent*	Spud	Colors
K-20713-ET		Top	0, 7
K-20713-ETSS	•	Top	0
K-20713-ER		Rear	0, 7



Products labeled ADA or ADA-compliant will comply with the Americans with Disabilities Act, when installed per the requirements of the 2010 ADA Standards for Accessible Design.



WaterSense®-labeled urinals use at least 50% less water than standard 1.0-gallon urinals while still meeting strict flushing performance guidelines.

*An antimicrobial agent is baked into the glaze and protects the urinal from the growth of stain- and odor-causing bacteria. This product does not protect users against bacteria, viruses or other disease organisms. Always clean and wash this product thoroughly before and after each use.

Codes/Standards
ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
IAPMO Certification

Colors



White (0) Black Black™ (7)

Complete your specification for top-spud urinals with any of the flushometers below:

TOUCHLESS ²	DESIGN	FLUSH RATE (gallons per flush)			DC POWER	HYBRID	FINISHES (BN, 2MB, BL referenced below is only available on DC-power flushometers)
	Mach Tripoint Urinal	0.125	•	•	K-10UD00D20	K-10UH00D20 ¹	CP, BN, 2MB, BL
		0.5	•	•	K-10UD00G20	K-10UH00G20 ¹	CP, BN, 2MB, BL
		1.0		•	K-10UD00K20	K-10UH00K20 (washout) K-10UH00K30 ¹ (blowout)	CP
	Mach Wave - Urinal	0.125	•	•	K-40UD00D20	K-40UH00D20 ¹	CP
		0.5	•	•	K-40UD00G20	K-40UH00G20 ¹	CP
		1.0		•	K-40UD00K20	K-40UH00K20 ¹	CP
MANUAL ²	DESIGN	FLUSH RATE (gallons per flush)			MANUAL		
	Mach Manual Urinal	0.125	•	•	K-80UM00D20		CP
		0.5	•	•	K-80UM00G20		CP
	Primme Urinal	0.125	•	•	K-76317		CP
		0.5	•	•	K-76318		CP
		1.0		•	K-76319		CP

¹ Retrofit versions available. Add "-RF" to end of SKU.
² Conversion kits to upgrade Kohler flushometers to the Mach platform are available. Please contact your Kohler Sales Executive for more detail.



WaterSense®-labeled toilets use at least 20% less water than standard 1.6-gallon toilets while still meeting strict flushing performance guidelines.

WaterSense®-labeled urinals use at least 50% less water than standard 1.0-gallon urinals while still meeting strict flushing performance guidelines.



Products labeled ADA or ADA-compliant will comply with the Americans with Disabilities Act, when installed per the requirements of the 2010 ADA Standards for Accessible Design, Section 605 (Urinals), of the Act.



Polished
Chrome
(CP)



Vibrant®
Brushed
Nickel
(BN)



Vibrant
Brushed
Moderne Brass
(2MB)



Matte
Black
(BL)

53

URINALS



Steward[®] S
Wall-mount waterless urinal

K-4917



Steward
Wall-mount waterless urinal

K-4918



Steward L
Wall-mount waterless urinal

K-4919



Steward Hybrid
Wall-mount washout urinal

0.125 gpf top spud (shown) K-5244-ET
0.125 gpf rear spud K-5244-ER



Bardon[™] Touchless
Wall-mount washout urinal

0.5 gpf K-32590



Bardon
Wall-mount washout urinal

0.125–1.0 gpf top spud K-4991-ET
0.125–1.0 gpf rear spud (shown) K-4991-ER



Stanwell[™]
Wall-mount blowout urinal

0.5–1.0 gpf top spud (shown) K-25048-ET
0.5–1.0 gpf rear spud K-25048-ER



Tend[™] Compact
Wall-mount washdown urinal

0.125-1.0 gpf rear spud K-20713-ER*
0.125-1.0 gpf top spud (shown) K-20713-ET*



Freshman[™]
Wall-mount siphon-jet urinal

1.0 gpf rear spud (shown) K-4989-R
1.0 gpf top spud K-4989-T



Dexter[™]
Wall-mount siphon-jet urinal

0.5–1.0 gpf rear spud (shown) K-5016-ER
0.5–1.0 gpf top spud K-5016-ET



Dexter
Wall-mount siphon-jet urinal

0.125 gpf rear spud (shown) K-5452-ER
0.125 gpf top spud K-5452-ET



Branham[™]
Floor-mount full stall washout urinal

0.5–1.0 gpf rear spud (shown) K-25039-R
0.5–1.0 gpf top spud K-25039-T

Name	Model Number	Dimensions		Gallons per Flush	Spud		With Antimicrobial Finish [†]	WaterSense [†]	ADA [‡]	White 0	Biscuit 96	Black Black 7
		Wall to Rim	Width x Height		Top	Rear						
Bardon	K-4991-ER	14½"	18" x 26⅞"	0.125–1.0		¾"	•	•	•	•		
	K-4991-ET	14½"	18" x 26⅞"		¾"		•	•	•	•	•	•
Bardon Touchless	K-32590	14¼"	18⅝" x 31⅙"	0.5		½"			•	•	•	•
Freshman	K-4989-R	12½"	16¼" x 24"	1.0		¾"				•		•
	K-4989-T	12½"	16¼" x 24"		¾"					•	•	•
Stanwell	K-25048-ET	14½"	18½" x 27"	0.5 or 1.0	¾"			•	•	•	•	•
	K-25048-ER	14½"	18½" x 27"			¾"		•	•	•		
Steward Hybrid	K-5244-ER	15⅞"	15" x 29⅞"	0.125		¾"		•	•	•		•
	K-5244-ET	15⅞"	15" x 29⅞"		¾"			•	•	•		•
Steward L	K-4919	15⅞"	19⅞" x 31⅞"	0					•	•		
Steward	K-4918	15⅞"	15" x 29⅞"	0					•	•		•
Steward S	K-4917	14¾"	11" x 23¾"	0					•	•		•
Branham	K-25039-R	16⅞"	18⅞" x 43"	0.5 or 1.0		¾"			•	•		
	K-25039-T	16⅞"	18⅞" x 43"		¾"				•	•	•	•
Dexter	K-5016-ER	14½"	13½" x 20⅞"	0.5 or 1.0		¾"	•	•	•	•	•	•
	K-5016-ET	14½"	13½" x 20⅞"		¾"		•	•	•	•	•	•
	K-5452-ER	14¾"	13¾" x 20¾"	0.125		¾"	•	•	•	•	•	•
	K-5452-ET	14¾"	13¾" x 20¾"		¾"		•	•	•	•	•	•
Tend Compact	K-20713-ER	14⅓⅙"	13" x 21⅞"	0.125-1.0		¾"	•	•	•	•		•
	K-20713-ET	14⅓⅙"	13" x 21⅞"		¾"		•	•	•	•		•

*See Price Book for ordering information.
†WaterSense[®]-compliant when used with WaterSense-labeled 0.125 or 0.5 gpf flushometer
‡ADA-compliant when rim is mounted no higher than 17" from the finished floor



FAUCETS & SOAP DISPENSERS

We understand that every commercial project is different in scale, user needs, traffic patterns, code compliance and surrounding materials. That's why we provide a range of faucets that go through a thoughtful design process and incorporate innovations that improve the overall experience. Whether you are a designer, developer, installer, maintenance staff or end user, you can be assured our products will meet your needs. To help you find the right solution, we offer manual and touchless faucets, touchless soap dispensers, various power options, vandal-resistant aerators and a variety of flow rates.



Taut
Single-handle commercial faucet
K-46028-4-CP

Commercial Single and Double Handle Faucets

Easy control and strong design come together in our commercial single-handle faucets.

Easy to install

Preattached supply lines make installation quick and easy.

Temperature index

Faucet handle features a red/blue temperature index.

Antitheft aerator

Secure aerator is vandal-resistant

Commercial design

Multiple drain options to suit any commercial setting.

Strong performance

Durable ceramic disc valves are tested to surpass industry standards.



Coralais® Single-handle



Coralais® 2-handle



July™



Taut®

Model Number	Vandal-Resistant Aerator	Max Flow Rate (GPM) ¹	Optional Escutcheon	Drilling	Lift Rod/Lift Rod hole	Drain			Red/Blue Indexing	ADA	Finishes
						Pop up drain with lift rod	Grid Drain	Less Drain			
Coralais Single-handle ²											
K-15198-4RA	•	0.5		4" centerset			•		•	•	CP
K-15198-4ATA	•	0.35		4" centerset			•		•	•	CP
K-15199-4NDRA	•	0.5		4" centerset				•	•	•	CP
K-15583-4RA	•	0.5		4" centerset	•	•			•	•	CP
K-15583-4ATA	•	0.35		4" centerset	•	•			•	•	CP
Coralais 2-handle ²											
K-15240-4NDRA	•	0.5		4" centerset				•	•	•	CP
K-15240-4ATA	•	0.35		4" centerset				•	•	•	CP
K-15243-4RA	•	0.5		4" centerset			•		•	•	CP
July Single-handle ²											
K-97282-4	•	0.5	•	Single-hole				•	•	•	CP
K-97283-4	•	0.5	•	Single-hole			•		•	•	CP
Taut											
K-46028-4	•	0.5	•	Single-hole				•	•	•	CP, BN
K-46029-4	•	0.5	•	Single-hole			•		•	•	CP
Taut Aerator Kit (only for Taut faucets above)											
K-30307	•	0.35									CP

¹Maximum flow rates are @ 60psi

²Optional aerators available



Faucets with lever handles comply with the actuation force limitations of the 2010 Americans with Disabilities Act Standards for Accessible Design, Section 309 (Operable Parts), of the Act.

Codes & Standards
ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC
IAPMO Certification



Polished Chrome (CP)



Vibrant® Brushed Nickel (BN)



Triton Bowe®

Commercial Faucets

We are pleased to present the Triton® Bowe faucet collection. With brass bodies; vandal-resistant handles; aerated, laminar or rose spray outlets; as well as Kohler's proven quarter-turn ceramic valves, the collection brings the performance and durability that is needed in commercial projects. Triton Bowe faucets are easy to install, suitable for retrofit and can help conserve water.



Vandal-resistant handles with red and blue indexing.



Designed for tough commercial applications to stand up to corrosion and abuse.

Full-brass faucet body
Full-brass valve body with ceramic parts
Chrome plating and PVD finishes exceed industry standards for durability



Preassembled components reduce installation time and ongoing maintenance.



ADA-compliant.

Low lead; complies with U.S. Safe Drinking Water Act.



Wide range of flow rates give you the flexibility to find options to best suit the installation and sustainability needs for your project.



Triton Bowe faucets use only two valve styles, streamlining maintenance and reducing inventory needs.

Lavatory Faucets

Lavatory faucets are available at various flow rates as detailed below, with both aerated and laminar outlets. Optional aerators to either increase or decrease flow rates are available on select faucets.



Centerset lavatory faucet with low spout and lever handles
0.5 gpm K-400T20-4ANA†
0.5 gpm K-400T20-4ANL‡
1.0 gpm K-400T20-4AKA
1.0 gpm K-400T20-4AKL



Centerset lavatory faucet with low spout and wristblade handles
0.35 gpm K-400T20-5ATA†
0.5 gpm K-400T20-5ANA†
0.5 gpm K-400T20-5ANL‡
1.0 gpm K-400T20-5AKA
1.0 gpm K-400T20-5AKL



Widespread lavatory faucet with low spout and lever handles
0.35 gpm K-800T20-4ATA†
0.5 gpm K-800T20-4ANA†
0.5 gpm K-800T20-4ANL‡
1.0 gpm K-800T20-4AKA
1.0 gpm K-800T20-4AKL



Widespread lavatory faucet with low spout and wristblade handles
0.5 gpm K-800T20-5ANA†
0.5 gpm K-800T20-5ANL‡
1.0 gpm K-800T20-5AKA
1.0 gpm K-800T20-5AKL



Centerset lavatory faucet with gooseneck spout and lever handles
0.5 gpm K-400T70-4ANA†
0.5 gpm K-400T70-4ANL‡
1.0 gpm K-400T70-4AKA
1.0 gpm K-400T70-4AKL



Centerset lavatory faucet with gooseneck spout and wristblade handles
0.35 gpm K-400T70-5ATA†
0.5 gpm K-400T70-5ANA†
0.5 gpm K-400T70-5ANL‡
1.0 gpm K-400T70-5AKA
1.0 gpm K-400T70-5AKL
1.0 gpm K-400T70-5AKC**



Widespread lavatory faucet with gooseneck spout and lever handles
0.5 gpm K-800T70-4ANA†
0.5 gpm K-800T70-4ANL‡
1.0 gpm K-800T70-4AKA
1.0 gpm K-800T70-4AKL



Widespread lavatory faucet with gooseneck spout and wristblade handles
0.35 gpm K-800T70-5ATA†
0.5 gpm K-800T70-5ANA†
0.5 gpm K-800T70-5ANL‡
1.0 gpm K-800T70-5AKA
1.0 gpm K-800T70-5AKL
1.0 gpm K-800T70-5AKC**



Monoblock lavatory faucet with gooseneck spout and lever handles
0.5 gpm K-100T70-4ANL‡
1.0 gpm K-100T70-4AKA
1.0 gpm K-100T70-4AKL



Monoblock lavatory faucet with gooseneck spout and wristblade handles
0.5 gpm K-100T70-5ANL‡
1.0 gpm K-100T70-5AKA
1.0 gpm K-100T70-5AKL



Shelf-back lavatory faucet with gooseneck spout and wristblade handles
2.0 gpm K-520T70-5AEA



Shelf-back lavatory faucet with pop-up drain and lever handles
2.0 gpm K-521T21-4AEA



Shelf-back lavatory faucet with lever handles
2.0 gpm K-522T20-4AEA



Wall-mount faucet with gooseneck spout, lever handles and rose spray
1.2 gpm K-730T70-4AJR§



Wall-mount faucet with swing spout and lever handles
1.8 gpm K-820T20-4AFA



Wall-mount faucet with swing spout and wristblade handles
1.8 gpm K-820T20-5AFA



Wall-mount lavatory faucet with gooseneck spout and lever handles
1.8 gpm K-820T70-4AFA



Wall-mount lavatory faucet with gooseneck spout and wristblade handles
1.8 gpm K-820T70-5AFA



Wall-mount lavatory faucet with gooseneck spout, wristblade handles and loose-key stops
2.0 gpm K-830T70-5AEA

Triton Bowe

Commercial Faucets

THE BOLD LOOK
OF KOHLER.

**Free-flow outlet with water-flow regulator at bottom of spout

†Meets California Energy Commission (CEC) standards

§Also available in Vibrant® Bright Nickel (SR)

Triton[®] Bowe[®] Commercial Faucets

Model Number

The Triton[®] Bowe model number is more than just a number. It identifies spout, valve, handle, flow rate and outlet type.

4	0	0	T	7	0	—	5	A	N	A	—	CP
Structure	Connection Type	Additional Features	Triton Bowe (Model)	Spout Type	Valve Type		Handle Type	Variation	Flow Rate	Outlet Type		Finish
1 Single Hole 4 4" Centers 5 5" Centers 7 Miscellaneous 8 8" Centers	0 Bathroom Deck-Mount 1 Kitchen Deck-Mount 2 Wall-Mount 3 Service	0 No Drain 1 With Pop-Up Drain 2 With Grid Drain 5, 7, 8 Miscellaneous	1, 2, 3, 4, 6, 8 Miscellaneous Geometries 7 Gooseneck	0 ¼-Turn 1 ¼-Turn With Diverter	4 Lever 5 Wristblade	A First Variation	E 2.0 F 1.8 G 1.75 H 1.5 J 1.2 K 1.0 N 0.5 T 0.35	A Aerated C Controlled H Hose L Laminar R Rose Spray	CP Polished Chrome SR Vibrant Bright Nickel (only for K-730T70 faucets)			

Not every configuration is available

Service and Utility Sink Faucets

			
Wall-mount faucet with gooseneck spout, lever handles and rose spray Full Flow K-730T70-4AR [§]	Wall-mount faucet with pail hook and lever handles Full Flow K-830T10-4A	Wall-mount faucet with pail hook and wristblade handles Full Flow K-830T10-5A	Wall-mount faucet with top-mounted wall brace and lever handles Full Flow K-830T40-4A
			
Wall-mount faucet with top-mounted wall brace and wristblade handles Full Flow K-830T40-5A	Wall-mount faucet with vacuum breaker threaded spout and lever handles Full Flow K-830T60-4A	Wall-mount faucet with vacuum breaker threaded spout, wall brace and lever handles Full Flow K-837T60-4A	Wall-mount faucet with bottom-mount wall brace, wristblade handles and loose-key stops Full Flow K-838T40-5A
			
Wall-mount faucet with vacuum breaker threaded spout, wall brace, lever handles and loose-key stops Full Flow K-838T60-4A	Wall-mouth faucet with vacuum breaker threaded spout, hose with wall hook, lever handles and loose-key stops Full Flow K-838T80-4A		

[§]Also available in Vibrant[®] Bright Nickel (SR)

Kitchen Sink Faucets[‡]

Kitchen sink faucets are available with standard 1.5 and 1.8 gpm flow rates. Optional 0.5 and 1.0 gpm aerators are available.

				
Kitchen sink faucet with swing spout and lever handles 1.5 gpm K-810T20-4AHA 1.8 gpm K-810T20-4AFA	Kitchen sink faucet with swing spout and wristblade handles 1.5 gpm K-810T20-5AHA 1.8 gpm K-810T20-5AFA	Kitchen sink faucet with swing spout, lever handles and sidespray 1.5 gpm K-810T21-4AHA 1.8 gpm K-810T21-4AFA	Kitchen sink faucet with swing spout, wristblade handles and sidespray 1.5 gpm K-810T21-5AHA 1.8 gpm K-810T21-5AFA	Kitchen sink faucet with swing spout and lever handles 1.5 gpm K-815T20-4AHA
				
Kitchen sink faucet with gooseneck spout and lever handles 1.5 gpm K-810T70-4AHA 1.8 gpm K-810T70-4AFA	Kitchen sink faucet with gooseneck spout and wristblade handles 1.5 gpm K-810T70-5AHA 1.8 gpm K-810T70-5AFA	Kitchen sink faucet with gooseneck spout, lever handles and sidespray 1.5 gpm K-810T71-4AHA 1.8 gpm K-810T71-4AFA	Kitchen sink faucet with gooseneck spout, wristblade handles and sidespray 1.5 gpm K-810T71-5AHA 1.8 gpm K-810T71-5AFA	Kitchen sink faucet with gooseneck spout and lever handles 1.5 gpm K-815T70-4AHA

[‡]All kitchen sink faucets meet California Energy Commission (CEC) standards

Codes/Standards

- ASME A112.18.1/CSA B125.1	- ADA*	- All applicable U.S. federal and state material regulations
- NSF/ANSI/CAN 61 [†]	- ICC/ANSI A117.1*	
- NSF/ANSI/CAN 372 [†]	- CSA B651*	- California Energy Commission (CEC) [‡]
- DOE Energy Policy Act 1992	- OBC*	IAPMO Certification

*ADA, CSA B651 compliant when installed to the specific requirements of these regulations. Refer to the product specification sheets for additional codes/standards.

[†]These codes only pertain to certain products contained in this document. Please refer to the product specification sheets for full details on codes and standards.

[‡]Meets California Energy Commission (CEC) standards.

[§]Features the Vibrant Bright Nickel (SR) finish.

Finish Options

	
Polished Chrome (CP)	Vibrant [®] Bright Nickel (SR)

TOUCHLESS FAUCET													FEATURE AVAILABILITY CHART														
Design Family Shown from \$ to \$\$\$	Deck Mount Installation	Wall Mount Installation	Kinesis Sensor	Insight Sensor	Basic Infrared	Above the deck valving	Below the deck valving	Behind the wall valving	CP	VS	Extended Finishes (BN, BL, 2MB)	Recommended Soap Dispenser Pairing		Drain Included (if blank, drain can be ordered seperately)	Supply lines included	With Mixer	Without Mixer (Mixers can be ordered seperately if desired)	Adjustable temperature on spout	Project Pack	AC Power (Single or multi supply ordered seperately)	DC Power	Hybrid Power	0.35 gpm	0.5 gpm	1.5 gpm	Optional aerators available	
Accliv					•		•		•			Curve						•				new battery pack ordered seperately	new battery pack ordered seperately	•	•		
Oblo Basic			•				•		•		•	Curve				•		•			•	•	•		•		
Kumin			•				•		•		•	Curve			•	•	•	•			•	•	•	•	•		•
Strayt			•				•		•		•	Angle			•	•	•	•			•	•	•	•	•		•
Sculpted				•		•			•	•		Angle				•	•	•	•			•	•		•		•
Gooseneck				•		•			•	•		Angle				•	•	•	•			•	•		•		
Geometric				•		•			•	•		Angle				•	•	•	•			•	•		•		•
Loure			•				•		•		•	Angle			•	•	•	•			•	•	•		•		
Oblo			•				•		•		•	Curve			•	•	•	•			•	•	•		•		
Components Row			•				•		•		•	Angle			•	•	•	•			•	•	•	•	•	•	
Composed			•				•		•		•	Composed			•	•	•	•			•	•	•	•	•		•
Oblo Tall			•				•		•		•	Curve			•	•	•	•			•	•	•		•		

Accliv™ Touchless Sensor Faucet

Affordable

Advanced sensor technology at an extraordinarily modest price, the Accliv touchless lavatory faucet takes industry-standard commercial faucet expectations and delivers them in a sleek, simple solution that will transport your restroom into a new realm of fully touchless possibilities.

Flexible

Includes the touchless faucet & mounting hardware, but installer has flexibility to pair the faucet with preferred power source (battery, plug-in AC power, or Hybrid Energy System) that best meets budget or building requirements. With KOHLER®, it's easy to find the design solution that's right for you.

Can easily be paired with escutcheons for renovation applications.

- Design-forward aesthetic for commercial bathroom spaces
- Below-counter valving reduces the faucet footprint and provides easier service
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- 4" (102 mm) spout reach
- Complies with the Safe Drinking Water Act (SDWA)
- Pair with select Kohler soap dispensers and single or two-hole escutcheons for an easy retrofit
- Includes spout and control box assemblies, and standard mounting hardware
- Less drain
- Concealed mechanical mixer sold separately
- Operates via battery, plug-in AC power, or Hybrid Energy System (each sold separately)



Accliv 0.5 gpm Touchless Sensor Faucet, Hybrid-Power
K-103A36-SBNA-CP
K-28520-NA

Renovation example of manual faucet to touchless solutions



Touchless Solutions shown (right)
Accliv 0.35 gpm Touchless Sensor Faucet, DC-Power
K-103A36-SBTA-CP
K-36264-NA
Curve® Soap Dispenser, DC-Power
K-25194-CP
Two-Hole Centerset Round Escutcheon
K-38169-CP

Description	SKU	Flow Rate (GPM)	Power Source (Choose one option below. Sold separately from faucets.)		
			AC-Power	DC-Power	Hybrid-Power
Accliv Touchless single-hole lavatory faucet	K-103A36-SBNA	0.5	13480-A-NA (Single Supply) OR	36264-NA	28520-NA
	K-103A36-SBTA	0.35	13481-A-NA (Multi Supply) ¹		

¹ Requires cable assemblies for each faucet.

Codes & Standards
ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC



Touchless products comply with the actuation force limitations of the 2010 ADA Standards for Accessible Design, Section 309 Operable Parts, of the Act.



Polished
Chrome
(CP)

Please see fittings section for optional escutcheons.




Geometric touchless faucet with Insight™ Technology
K-7516-CP

Insight Sensor Technology

THE BOLD LOOK
OF **KOHLER.**

Touchless Faucets with **INSIGHT TECHNOLOGY**

Improved over traditional infrared sensors that rely on fixed settings and may misread environments, Insight technology features an adaptive infrared sensor that has the ability to analyze the surrounding area once installed. After recording these details, Insight is able to calibrate the sensor to filter false triggers and optimize the faucet’s operation.

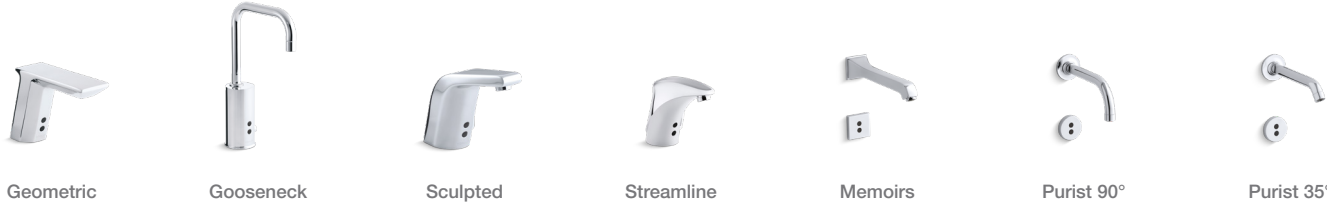

Faucet	Flow Rate (GPM)	AC-powered	DC-powered	Hybrid powered	Finishes
Geometric					
Touchless Faucet	0.35		K-13467-SATA	K-7516-SATA	CP
	0.5	K-13469	K-13467	K-7516	CP, VS (K-7516 only)
Touchless Faucet with Mixer	0.35	K-13468-SATA	K-13466-SATA	K-7517-SATA	CP
	0.5	K-13468	K-13466	K-7517	CP, VS
Gooseneck					
Touchless Faucet	0.35		K-13473-SATA		CP
	0.5	K-13475	K-13473	K-7518	CP, VS (K-13473 only)
Touchless Faucet with Mixer	0.35	K-13474-SATA	K-13472-SATA	K-7519-SATA	CP
	0.5	K-13474	K-13472	K-7519	CP, VS (K-13472, K-7519 only)
Touchless Faucet with Mixer, BAA	0.35			K-45345-BA	CP
Sculpted					
Touchless Faucet	0.35	K-13463-SATA	K-13461-SATA	K-7514-SATA	CP
	0.5	K-13463	K-13461	K-7514	CP, VS (K-13461, K-7514 only)
Touchless Faucet with Mixer	0.35	K-13462-SATA	K-13460-SATA	K-7515-SATA	CP
	0.5	K-13462	K-13460	K-7515	CP, VS
Streamline					
Touchless Faucet with Mixer, BAA	0.35			K-45344-BA	CP
Memoirs					
Touchless Faucet	0.5	K-T11838		K-T11838	CP, VS
Required Rough In Valve for above	N/A	K-11842		K-11831	N/A
Purist 90°					
Touchless Faucet, 6" spout	0.5	K-T11841		K-T11841	CP
Touchless Faucet, 9" spout	0.5	K-T11839		K-T11839	CP, VS
Required Rough In Valve for above	N/A	K-11843		K-11830	N/A
Purist 35°					
Touchless Faucet, 6 1/4" spout	0.5	K-T11840		K-T11840	CP
Touchless Faucet, 8 1/4" spout	0.5	K-T11837		K-T11837	CP, VS
Required Rough In Valve for above	N/A	K-11843		K-11830	N/A

Please see fittings section for optional aerators and escutcheons.





Oblo® Tall Touchless Faucet
With Kinesis™ Technology
K-103B86-SANA-CP

Leading Design.
Industrial Performance.

Touchless Commercial Faucets With Kinesis Technology

THE BOLD LOOK
OF **KOHLER.**

Kinesis™ Technology

The new KOHLER® touchless commercial faucets combine leading-edge designs with advanced sensor technology and commercial durability. The faucets carry over the design language from our residential faucet lines, allowing you to coordinate full collections in your projects. Kinesis technology conceals the sensor underneath the spout, giving you a clean aesthetic while also delivering exceptionally accurate and reliable actuation in varying installation environments.



- Concealed sensors with Kinesis technology
- 0.5 gal/min (1.9 l/m) flow rate and vandal- resistant aerators and outlets. Lower-flow aerators sold separately.
- On-demand usage with maximum 30-second continual-run cycle to prevent vandalism and save water
- Includes grid drain and below-the-deck valving
- AC, DC & Hybrid¹ power supply options.
- Single-supply and mechanical mixer options
- Optional thermostatic mixer sold separately

SKU LOGIC CHART

EXAMPLE: Composed Deck Mount 0.5 GPM single supply touchless fuacet, AC-powered in Polished Chrome = 103C36-SANA-CP

1	0	3	C	3	6	-	S	A	N	A	-	CP
Hole Structure	Connection Type	Power Option	Model	Spout Type	Valve Type	-	Sensor	Variation	Flow Rate	Outlet Type (Flow)	-	Finish
1 Single-Hole	0 Deck-Mount	3 AC	B Oblo	1 Short	6 Solenoid	-	S Sensor	A Base Variation	N 0.5 gpm	A Aerated	-	CP Polished Chrome
4 4"	2 Wall-Mount	4 DC	C Composed	3 Mid-Size	7 Solenoid w/ Mixer	-		B No Drain	T 0.35 gpm	L Laminar	-	BN Brushed Nickel
5 5"		6 Hybrid¹	K Kumin	7 Gooseneck	9 Solenoid w/IoT	-			H 1.5 gpm		-	BL Matte Black
6 6"			L Loure	8 Tall		-					-	2MB Brushed Modern Brass
7 Misc			S Strayt			-					-	
8 8"			A Accliv²			-					-	
			BB Oblo Basic			-					-	
			M Components Row			-					-	


Not every configuration is available.

¹Hybrid power delivers uninterruptable power for 875,000 cycles, which on average usage, equates to approximately 30 years of usage.

²Accliv Faucet is a basic infrared sensor, not Kinesis, but still follows SKU logic.

Commercial Faucets With Kinesis™ Technology

Bring bold style and exceptional performance to your next project with new KOHLER® touchless faucets.

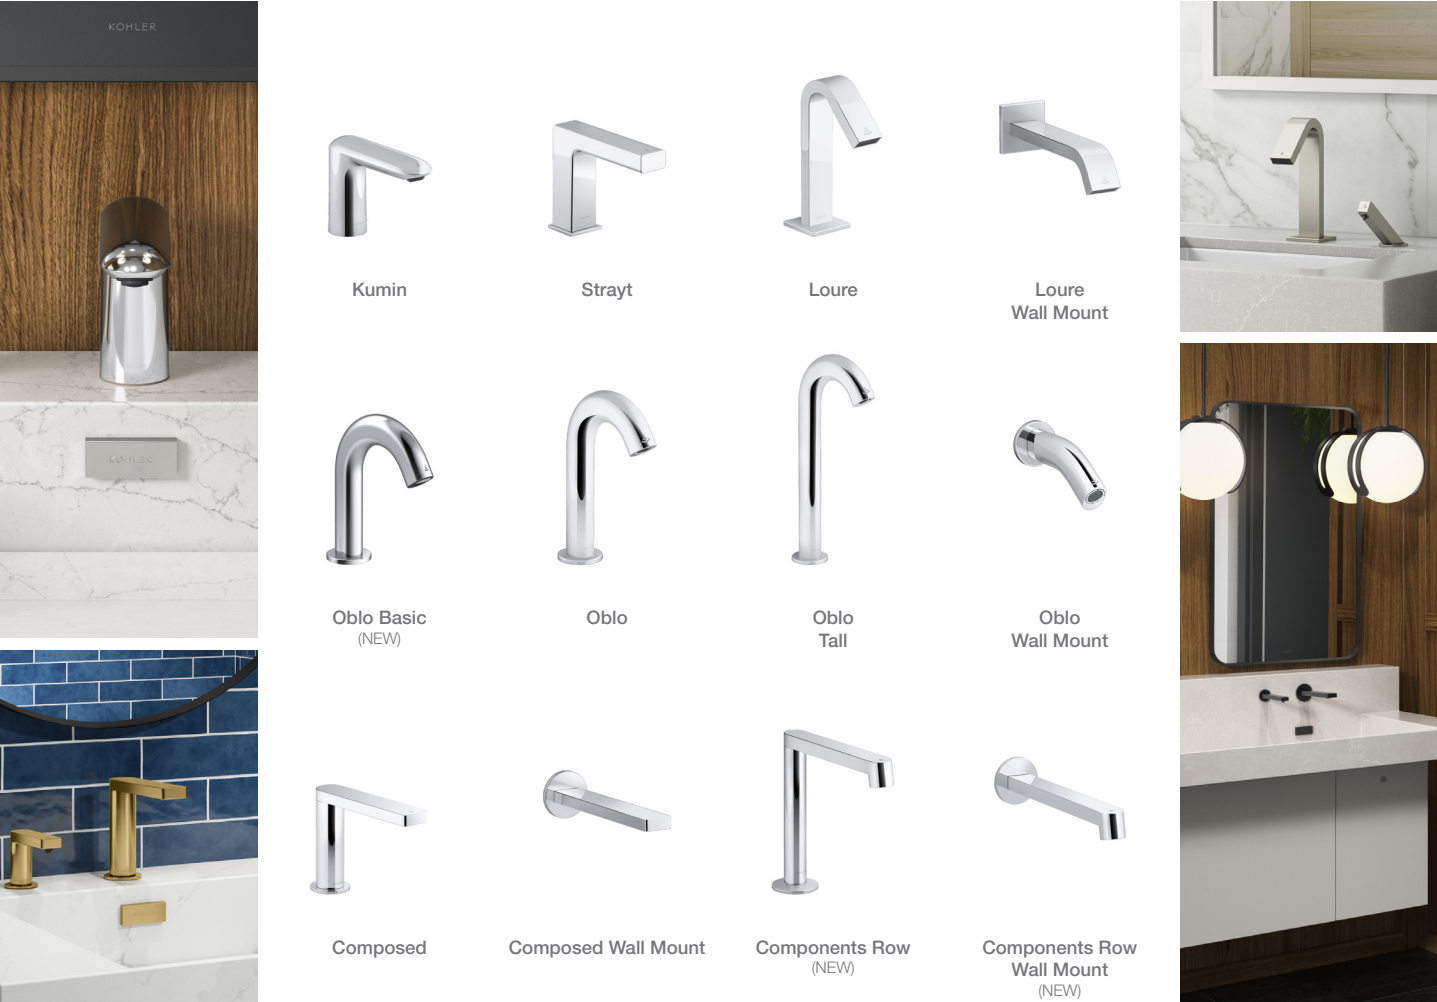

Design Family	SKU	Installation Type	Flow Rate	Laminar	AC powered	DC powered	Hybrid powered	Drain Included	Supply Type	Finishes	Project Pack Version
Listed from \$ to \$\$\$			GPM								CP Only No drain/mixer 3 faucets/pack
Oblo Basic	K-103BB76-SBNA	Deck Mount	0.5		•				Single Supply	CP, BN, BL, 2MB	P103BB76-SBNA-CP
	K-104BB76-SBNA	Deck Mount	0.5			•			Single Supply	CP	P104BB76-SBNA-CP
	K-106BB76-SBNA	Deck Mount	0.5				•		Single Supply	CP	
Kumin	K-103K36-SATA	Deck Mount	0.35		•			•	Single Supply	CP	
	K-104K36-SATA	Deck Mount	0.35			•		•	Single Supply	CP	
	K-103K36-SANA	Deck Mount	0.5		•			•	Single Supply	CP, BN, BL, 2MB	P103K36-SBNA-CP
	K-104K36-SANA	Deck Mount	0.5			•		•	Single Supply	CP	P104K36-SBNA-CP
	K-106K36-SANA	Deck Mount	0.5				•	•	Single Supply	CP	
	K-103K37-SANA	Deck Mount	0.5		•			•	Mixer	CP	
	K-104K37-SANA	Deck Mount	0.5			•		•	Mixer	CP	
	K-106K37-SANA	Deck Mount	0.5				•	•	Mixer	CP	
Strayt	K-103S36-SATA	Deck Mount	0.35		•			•	Single Supply	CP	
	K-104S36-SATA	Deck Mount	0.35			•		•	Single Supply	CP	
	K-103S36-SANA	Deck Mount	0.5		•			•	Single Supply	CP, BN, BL, 2MB	P103S36-SBNA-CP
	K-104S36-SANA	Deck Mount	0.5			•		•	Single Supply	CP	P104S36-SBNA-CP
	K-106S36-SANA	Deck Mount	0.5				•	•	Single Supply	CP	
	K-103S37-SANA	Deck Mount	0.5		•			•	Mixer	CP	
	K-104S37-SANA	Deck Mount	0.5			•		•	Mixer	CP	
	K-106S37-SANA	Deck Mount	0.5				•	•	Mixer	CP	

Design Family	SKU	Installation Type	Flow Rate	Laminar	AC powered	DC powered	Hybrid powered	Drain Included	Supply Type	Finishes	Project Pack Version
Listed from \$ to \$\$\$			GPM								CP Only No drain/mixer 3 faucets/pack
Loure	K-103L76-SANL	Deck Mount	0.5	•	•			•	Single Supply	CP, BN, BL, 2MB	
	K-104L76-SANL	Deck Mount	0.5	•		•		•	Single Supply	CP	
	K-106L76-SANL	Deck Mount	0.5	•			•	•	Single Supply	CP	
	K-103L77-SANL	Deck Mount	0.5	•	•			•	Mixer	CP	
	K-104L77-SANL	Deck Mount	0.5	•		•		•	Mixer	CP	
	K-106L77-SANL	Deck Mount	0.5	•			•	•	Mixer	CP	
	K-123L36-SANL	Wall Mount	0.5	•	•			•	Single Supply	CP, BN, BL, 2MB	
	K-124L36-SANL	Wall Mount	0.5	•		•		•	Single Supply	CP	
Oblo	K-126L36-SANL	Wall Mount	0.5	•			•	•	Single Supply	CP	
	K-103B76-SANA	Deck Mount	0.5		•			•	Single Supply	CP, BN, BL, 2MB	
	K-104B76-SANA	Deck Mount	0.5			•		•	Single Supply	CP	
	K-106B76-SANA	Deck Mount	0.5				•	•	Single Supply	CP	
	K-103B77-SANA	Deck Mount	0.5		•			•	Mixer	CP	
	K-104B77-SANA	Deck Mount	0.5			•		•	Mixer	CP	
	K-106B77-SANA	Deck Mount	0.5				•	•	Mixer	CP	
	K-123B16-SANA	Wall Mount	0.5		•			•	Single Supply	CP, BN, BL, 2MB	
Components Row	K-124B16-SANA	Wall Mount	0.5			•		•	Single Supply	CP	
	K-126B16-SANA	Wall Mount	0.5				•	•	Single Supply	CP	
	K-103M36-SATA	Deck Mount	0.35		•			•	Single Supply	CP	
	K-104M36-SATA	Deck Mount	0.35			•		•	Single Supply	CP	
	K-106M36-SATA	Deck Mount	0.35				•	•	Single Supply	CP	
	K-103M36-SANA	Deck Mount	0.5		•			•	Single Supply	CP, BN, BL, 2MB	P103M36-SBNA-CP
	K-104M36-SANA	Deck Mount	0.5			•		•	Single Supply	CP	
	K-106M36-SANA	Deck Mount	0.5				•	•	Single Supply	CP	
	K-103M37-SANA	Deck Mount	0.5		•			•	Mixer	CP	
	K-104M37-SANA	Deck Mount	0.5			•		•	Mixer	CP	
	K-106M37-SANA	Deck Mount	0.5				•	•	Mixer	CP	
	K-103M36-SANL	Deck Mount	0.5	•	•			•	Single Supply	CP	
Composed	K-123M36-SANA	Wall Mount	0.5		•			•	Single Supply	CP	
	K-126M36-SANA	Wall Mount	0.5				•	•	Single Supply	CP	
	K-103M36-SAHL	Deck Mount	1.5	•	•			•	Single Supply	CP	
	K-103C36-SATA	Deck Mount	0.35		•			•	Single Supply	CP	
	K-104C36-SATA	Deck Mount	0.35			•		•	Single Supply	CP	
	K-103C36-SANA	Deck Mount	0.5		•			•	Single Supply	CP, BN, BL, 2MB	
	K-104C36-SANA	Deck Mount	0.5			•		•	Single Supply	CP	
	K-106C36-SANA	Deck Mount	0.5				•	•	Single Supply	CP	
Oblo Tall	K-103C37-SANA	Deck Mount	0.5		•			•	Mixer	CP	
	K-104C37-SANA	Deck Mount	0.5			•		•	Mixer	CP	
	K-106C37-SANA	Deck Mount	0.5				•	•	Mixer	CP	
	K-123C36-SANA	Wall Mount	0.5		•			•	Single Supply	CP, BN, BL, 2MB	
	K-124C36-SANA	Wall Mount	0.5			•		•	Single Supply	CP, BN, BL	
	K-126C36-SANA	Wall Mount	0.5				•	•	Single Supply	CP	
	K-103B86-SANA	Deck Mount	0.5		•			•	Single Supply	CP, BN, BL, 2MB	
	K-104B86-SANA	Deck Mount	0.5			•		•	Single Supply	CP	
	K-106B86-SANA	Deck Mount	0.5				•	•	Single Supply	CP	
	K-103B87-SANA	Deck Mount	0.5		•			•	Mixer	CP	
	K-104B87-SANA	Deck Mount	0.5			•		•	Mixer	CP	
	K-106B87-SANA	Deck Mount	0.5				•	•	Mixer	CP	

AC SKU's are a base faucet and requires for AC supply to be purchased seperately. If different power option is desired, DC or Hybrid battery packs can also be used on these AC SKU's.

Codes/Standards

- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61
- NSF/ANSI/CAN 372
- DOE Energy Policy Act 1992
- California Energy Commission (CEC)

-ADA

-ICC/ANSI A117.1-CSA B651

-OBC

-IAPMO Certification

-All applicable U.S. federal and state material regulations

ADA

-ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

Polished Chrome (CP)

Vibrant@ Brushed Nickel (BN)

Vibrant Brushed Moderne Brass (2MB)

Matte Black (BL)

Please see fittings section for optional aerators and escutcheons.



Composed Touchless Soap Dispenser
K-25195-2MB

Touchless Soap Solutions

The perfect complement

THE BOLD LOOK
OF **KOHLER**

Touchless Soap Dispensers

The perfect complement to Touchless Faucets
Introducing our touchless soap dispenser collection designed to complement any touchless faucet in the market. This collection features foam soap dispensing technology with anti-drip nozzle, and is recommended to be used with Kohler foam soap for optimized performance and component longevity. Refillable 1600ml reservoir included.

- Clean in all directions**
Touchless actuation and serviceable below the deck to minimize the risk of cross-contamination.
- Ease of Installation & Maintenance**
Automatic sensor adjustment at install. Reservoir can be installed at convenient refill location. Above the deck LED indicators for low soap and low battery ¹.
- Flexible Use**
Adjustable foam soap dispensing volume. Can be used with Kohler foam soap or with other brands².



Design Family	Installation	AC-power SKU ³	DC-power SKU	Finish (Extended finishes of BN, 2MB, and BL are available on all DC-power options. Composed wall-mount AC-power has BN and BL for extended finishes)
Composed Wall	Wall Mount	K-22848	K-22847	CP, BN, 2MB, BL
Composed Deck	Deck Mount	K-25198	K-25195	CP, BN, 2MB, BL
Angle	Deck Mount	K-25196	K-25193	CP, BN, 2MB, BL
Curve	Deck Mount	K-25197	K-25194	CP, BN, 2MB, BL

¹ Low battery indicator for DC version only.
² Requires low (1-20 cps or gr/m-s) viscosity foam soap with no suspended particles.
³ AC Adapters sold separately. Available for single dispenser and multi dispenser installations.

Please see fittings section for optional escutcheons for faucet and soap pairing.



KOHLER Foam Soap

The perfect complement to touchless soap foam dispensers
Wash the day away with Kohler's foam soap that is specially formulated to work with Kohler touchless soap dispensers. Available in 2 types:

- Hollyhock: Featuring Kohler's signature scent. Enriched moisture wash formula with Emollients and Humectants to help soothe and maintain the skin's natural moisture.
- Unscented/No added dyes: General purpose soap with no added fragrance or dyes. Ecologo certified.



- Hygiene/Clean**
Single use disposable soap option available to minimize cross-contamination.
- Flexible Use**
Can be used with Kohler touchless soap dispensers or any other brands that use foam soap with similar properties.

SKU	Type	Fragrance/Dye	Size	Units/Package	Certification
K-24877-NA	Single Use Disposable	Unscented/No added dye	800 ml	6	Ecologo 27
K-24878-NA	Single Use Disposable	Unscented/No added dye	1600 ml	4	Ecologo 27
K-24879-NA	Single Use Disposable	Hollyhock/Teal color	800 ml	6	
K-24880-NA	Single Use Disposable	Hollyhock/Teal color	1600 ml	4	
K-24881-NA	Bulk Soap	Unscented/No added dye	1 gallon	2	Ecologo 27
K-24882-NA	Bulk Soap	Unscented/ No added dye	5 gallon	1	Ecologo 27

Soaps must be purchased at package qtys.



LAVATORIES

Crafted with decades of experience, KOHLER® lavatories are engineered to provide years of lasting performance. The fired glaze on our porcelain forms a permanent finish which resists staining and scratching. This finish maintains its high gloss and allows for easy cleaning. The ultrathick enamel applied to our cast iron lavatories also resists staining, scratching and chipping while maintaining its lustrous sheen.

WALL MOUNT LAVATORIES

VITREOUS CHINA



Brenham™ Wall-mount lavatory		Brenham Wall-mount lavatory with shroud		Soho® Wall-mount lavatory		Chesapeake™ Wall-mount lavatory	
4" drilling (shown)	K-1997-4	4" drilling	K-1999-4	4" drilling (shown)	K-2054	4" drilling (shown)	K-1728
8" drilling	K-1997-8	8" drilling (shown)	K-1999-8	8" drilling	K-2053	8" drilling	K-1724
Single drilling	K-1997-1	Single drilling	K-1999-1	Single drilling	K-2084	Single drilling	K-1722



Greenwich™ Wall-mount lavatory		Kingston™ Wall-mount lavatory		Morningside™ Wall-mount wheelchair-accessible lavatory	
4" drilling	K-2032	4" drilling (shown)	K-2005	11½" drilling (shown)	K-12634
8" drilling (shown)	K-2030	8" drilling	K-2006	4" drilling	K-12636
Single drilling	K-2031	Single drilling	K-2007	Single drilling	K-12638
Single drilling, Knee Controls	K-12643				

Name	Model Number	Dimensions (L x W)	Overflow	Faucet Hole Drilling				Custom Drilling			Includes	ADA	Antimicrobial	White 0	Biscuit 96	Black Black 7
				Single	4" Centerset	8" Widespread	11½" Widespread	For Concealed Arm Carrier	For Knee-Control Fitting	Available With Soap Dispenser Hole						
Vitreous China																
Brenham	K-1997-1	21 ¹⁵ / ₁₆ " x 19 ³ / ₄ "	•	•				•		R & L		•	•	•	•	•
				•				•		NR & NL		•	•	•		
	K-1997-4		•		•			•				•	•	•	•	•
	K-1997-8		•			•		•				•	•	•	•	•
	K-1999-1		•	•				•			Shroud K-1998	•	•	•	•	•
	K-1999-4		•		•			•			Shroud K-1998	•	•	•	•	•
	K-1999-8		•			•		•			Shroud K-1998	•	•	•	•	•
Chesapeake	K-1722	19¼" x 17¼"	•	•				•				•		•	•	
	K-1724		•			•		•				•		•		
	K-1728		•		•			•					•		•	•
Greenwich	K-2030	20¾" x 18¼"	•			•		•		R & L		•		•	•	•
	K-2031		•	•				•		R & L		•		•		
				•				•		NR & NL		•		•		
	K-2032		•		•			•		R & L		•		•	•	•
					•			•		NR & NL		•		•		
	K-12643		•				•	•				•		•		
Kingston	K-2005	21¼" x 18¼"	•		•			•		R & L		•		•	•	•
	K-2006		•			•		•				•		•	•	•
	K-2007		•	•				•		R & L		•		•		
Morningside	K-12634	20" x 27"	•				•									
	K-12636		•		•			•		R & L		•		•		
	K-12638		•	•				•		R & L		•		•		
Soho	K-2053	20" x 18"	•			•		•		R & L		•		•	•	•
						•		•		NR & NL		•		•		
	K-2054		•		•			•		R		•		•	•	•
					•			•		NR & NL		•		•		
	K-2084		•	•				•		R & L		•		•	•	•
				•				•		NR & NL		•		•		

ADA-compliant products will comply with the Americans with Disabilities Act when installed per the requirements of the accessibility guidelines, Section 606 of the Act.

Lavatories in colors other than White with soap dispenser/bolt holes and/or sealed overflow are made to order. Contact Customer Service for details.

WALL MOUNT LAVATORIES

CAST IRON



Hudson™ Wall-mount lavatory		Hudson Wall-mount lavatory	
4" drilling (shown)	K-2861	4" drilling	K-2867
8" drilling	K-2863	8" drilling	K-2868
Single drilling	K-2805	Single drilling (shown)	K-2812

Name	Model Number	Dimensions (L x W)	Faucet Hole Drilling			Includes	ADA	White 0
			Single	4" Centerset	8" Widespread			
KOHLER Enameled Cast Iron								
Hudson	K-2805	19" x 17"	•				•	•
	K-2861			•			•	•
	K-2863				•		•	•
	K-2812	20" x 18"	•			Lugs for chair carrier	•	•
	K-2867			•		Lugs for chair carrier	•	•
	K-2868				•	Lugs for chair carrier	•	•

ADA-compliant products will comply with the Americans with Disabilities Act when installed per the requirements of the accessibility guidelines, Section 606 of the Act.

UNDERMOUNT SINKS

VITREOUS CHINA



Caxton® Undermount sink (Shown 2210-0)		Verticyl® Undermount sink (Shown 2882-0)	
--	--	--	--

Oval - 15"x12", rear drain	K-2209	Oval	K-2881
Oval - 17"x14", center drain	K-2205	Rectangle, 17¼" x 13"	K-2882
Oval - 17"x14", rear drain	K-2210	Round	K-2883
Oval - 19"x15", rear drain	K-2211	Square	K-8188
Rectangle, center drain	K-20000	Rectangle, 15¼" x 11½"	K-8189
Round, center drain	K-29000	Trough, 39¾" x 15¼"	K-8192

Name	Model Number	Shape	Drain Location	Overflow	Glazed Underside	Dimensions (L x W) (Bowl Area)	Includes	ADA	White 0	Biscuit 96	Black Black 7
Vitreous China											
Caxton	K-2209	Oval	Rear	•		15"x12"	Basin clamps	•	•	•	•
	K-2205	Oval	Center			17" x 14"		•	•	•	
	K-2205-G	Oval	Center		•	17" x 14"		•	•	•	
	K-2210	Oval	Rear	•		17" x 14"		•	•	•	•
	K-2210-N	Oval	Rear			17" x 14"		•	•	•	
	K-2210-G	Oval	Rear		•	17" x 14"		•	•	•	
	K-2211	Oval	Rear	•		19"x15"		•	•	•	•
	K-2211-G	Oval	Rear		•	19"x15"		•	•	•	
	K-20000	Rectangle	Center	•		17⅞" x 13⅞"		•	•	•	•
	K-29000	Round	Center			13⅓⅙"		•	•	•	•
Verticyl	K-2881	Oval	Center	•		17" x 14"		•	•	•	•
	K-2882	Rectangle	Center	•		17¼" x 13"		•	•	•	•
	K-2883	Round	Center	•		13¾"		•	•	•	•
	K-8188	Square	Center	•		11" x 11"		•	•	•	•
	K-8189	Rectangle	Center	•		15¼" x 11½"		•	•	•	•
	K-8192	Trough	Center	•		39¾" x 15¼"		•	•		

ADA-compliant products will comply with the Americans with Disabilities Act when installed per the requirements of the accessibility guidelines, Section 606 of the Act.

SERVICE & UTILITY SINKS



Gilford™
Wall-mount service sink

Two faucet holes (shown) K-12787
Single drilling K-12781 / K-12784



Hollister™
Wall-mount service/utility sink

Single drilling (shown) K-12793
Widespread drilling K-12794



Bannon™
Wall-mount service sink with rim guard

Two faucet holes (shown) K-6714 / K-6716
No drilling K-6718 / K-6719



Brockway™
Wall-mount wash sink

3' with two faucet drillings (shown) K-3200
4' with two faucet drillings K-3202
5' with three faucet drillings K-3203



Camerton™
Wall-mount blow-out service sink

K-12867



Tyrrell™
Floor-mount siphon jet service sink

K-6676



Whitby™
Floor-mount corner service sink

K-6710

Name	Model Number	Dimensions (L x W)	Material	Spud Location	Faucet Hole Drilling				Includes	Recommended Accessories	White 0
					Single	Two-Hole	8" Widespread	No Drilling			
Wall-Mount Sinks											
Gilford	K-12781	30" x 22"	Vitreous china		•						•
	K-12784	24" x 22⅝"	Vitreous china		•						•
	K-12787	30" x 22"	Vitreous china			•				K-7319, K-7320 or K-8905 faucet	•
Hollister	K-12793	28" x 22"	Vitreous china		•					K1814-P Wall-mount sink brackets, K-8820 Sink Drain, K-9000 P-trap	•
	K-12794	28" x 22"	Vitreous china				•				•
Bannon	K-6714	22¼" x 18¼"	KOHLER enameled cast iron			•			Rim guard	K-8905 or K-8907 faucet	•
	K-6716	24" x 20¼"	KOHLER enameled cast iron			•			Rim guard	K-8905 or K-8907 faucet	•
	K-6718	22¼" x 18¼"	KOHLER enameled cast iron					•	Rim guard		•
	K-6719	24" x 20¼"	KOHLER enameled cast iron					•	Rim guard		•
Brockway	K-3200	36" x 17½"	KOHLER enameled cast iron			(2)•			Drillings for two faucets and one soap dish	K-8892 faucet, K-8880 soap dish	•
	K-3202	48" x 17½"	KOHLER enameled cast iron			(2)•			Drillings for two faucets and one soap dish	K-8892, K-730T70-4AJR or K-730T70-4AR faucet, K-8880 soap dish, K-3264-P/-PP or K-3265-P/-PP adjustable pedestal	•
	K-3203	60" x 17½"	KOHLER enameled cast iron			(3)•			Drillings for three faucets and two soap dishes	K-8892, K-730T70-4AJR or K-730T70-4AR faucet, K-8880 soap dish, K-3264-P/-PP or K-3265-P/-PP adjustable pedestal	•
Camerton	K-12867	25" x 21½"	Vitreous china	Top						K-8935 Rim Guard, K-13864 Sink Strainer, K-11352 Disposal Flange with Stopper	•
Tyrell	K-6676	26⅝" x 21"	Vitreous china	Top						K-8935 Rim Guard	•
Floor-Mount Sinks											
Whitby	K-6710	28" x 28"	KOHLER enameled cast iron					•		K-8940 rim guard	•



SHOWERING, ACCESSORIES, & FITTINGS

Kohler is committed to helping you provide safety and convenience in the washroom. To do that, we design and manufacture showering products and accessories that are durable, simple to maintain and come with easy-to-replace pieces.

SHOWERING

SHOWERING PACKAGES									
  									
Handshower Only Package, 1.5 gpm Awaken B110 Multi-function handshower MasterShower 60" hose, metal Awaken supply elbow w/ check valve Awaken Deluxe 36" slidebar Coralais shower trim Pressure balance valve w/ service stops K-72421-H K-9514 K-98351 K-98343 K-TS15621-4 K-8304-KS Handshower Only Package, 1.75 gpm Awaken B110 MF handshower kit Awaken supply elbow w/ check valve Coralais shower trim Pressure balance valve w/ service stops K-99899-G K-98351 K-TS15621-4 K-8304-KS Handshower Only Package, 2.5 gpm Awaken B110 MF handshower kit Awaken supply elbow w/ check valve Coralais shower trim Pressure balance valve w/ service stops K-99899-Y K-98351 K-TS15621-4 K-8304-KS									

  									
Showerhead & Handshower Package, 1.5 gpm Coralais Shower Trim Kit Pressure balance valve w/ service stops Awaken B110 Multi-function handshower MasterShower 60" hose, metal Awaken supply elbow w/ check valve Awaken Deluxe 36" slidebar Coralais Transfer Trim MasterShower Transfer Valve TS15611-4H K-8304-KS K-72421-H K-9514 K-98351 K-98343 K-T97831-4 K-728-K or K-737-K Showerhead & Handshower Package, 1.75 gpm Coralais Shower Trim Kit Pressure balance valve w/ service stops Awaken B110 MF handshower kit Awaken supply elbow w/ check valve Coralais Transfer Trim MasterShower Transfer Valve TS15611-4G K-8304-KS K-99899-G K-98351 K-T97831-4 K-728-K or K-737-K Showerhead & Handshower Package, 2.5 gpm Coralais Shower Trim Kit Pressure balance valve w/ service stops Awaken B110 MF handshower kit Awaken supply elbow w/ check valve Coralais Transfer Trim MasterShower Transfer Valve TS15611-4 K-8304-KS K-99899-Y K-98351 K-T97831-4 K-728-K or K-737-K									

SHOWERING PACKAGES				SHOWERING TRIM			
  							
Triton Bowe Industrial exposed shower 1.75 gpm K-630T40-4AG				Triton Rite-Temp pressure-balancing valve trim Lever handle (shown) Standard handle K-TS6913-4 K-TS6913-2 Triton Wall-mount handle trim Without diverter Cross Handle Lever Handle (shown top) K-T7744-3 K-T7744-4 With diverter Cross Handle Lever Handle (shown bottom) K-T7751-3 K-T7751-4			

Model Number	Description	Handles	Note	Flow Rate (GPM)	CEC	Watersense	ADA	Polished Chrome CP	Vibrant Brushed Nickel BN	Vibrant Brushed Moderne Brass 2MB	Matte Black BL	Additional finishes available (Please see price book and website for detail)
Handshower Only Package, 1.5 gpm												
K-72421-H	Awaken B110 Multi-function handshower		3 spray functions, Nonpositive shutoff	1.5	•	•	•	•				
K-9514	MasterShower 60", metal							•	•	•	•	•
K-98351	Awaken		with check valve					•	•	•	•	•
K-98343	Awaken Deluxe slidebar		36"				•	•	•	•	•	•
K-TS15621-4	Coralais Shower Trim	Lever	Requires K-8304-KS-NA or other K-8304 series options.				•	•				
Handshower Only Package, 1.75 gpm												
K-99899-G	Awaken B110 MF handshower kit		includes handshower, hose, slidebar	1.75	•	•	•	•	•			
K-98351	Awaken		with check valve					•	•	•	•	•
K-TS15621-4	Coralais Shower Trim	Lever	Requires K-8304-KS-NA or other K-8304 series options.				•	•				
Handshower Only Package, 2.5 gpm												
K-99899-Y	Awaken B110 MF handshower kit		includes handshower, hose, slidebar	2.5				•	•			
K-98351	Awaken		with check valve					•	•	•	•	•
K-TS15621-4	Coralais Shower Trim	Lever	Requires K-8304-KS-NA or other K-8304 series options.				•	•				
Showerhead & Handshower Package, 1.5 gpm												
K-TS15611-4H	Coralais shower trim kit	Lever	Includes showerhead, showerarm, valve trim. Requires K-8304-KS-NA or other K-8304 series options.	1.5	•	•	Lever handle ADA	•				
K-72421-H	Awaken B110 Multi-function handshower		3 spray functions, Nonpositive shutoff	1.5	•	•	•	•				
K-9514	MasterShower 60", metal							•	•	•	•	•
K-98351	Awaken		with check valve					•	•	•	•	•
K-98343	Awaken Deluxe slidebar		36"				•	•	•	•	•	•
K-T97831-4	Coralais Transfer Valve Trim	Lever	Requires K-728-K-NA or K-737-K-NA				•	•				
Showerhead & Handshower Package, 1.75 gpm												
K-TS15611-4G	Coralais shower trim kit	Lever	Includes showerhead, showerarm, valve trim. Requires K-8304-KS-NA or other K-8304 series options.	1.75	•	•	Lever handle ADA	•				
K-99899-G	Awaken B110 MF handshower kit		includes handshower, hose, slidebar	1.75	•	•	•	•	•			
K-98351	Awaken		with check valve					•	•	•	•	•
K-T97831-4	Coralais Transfer Valve Trim	Lever	Requires K-728-K-NA or K-737-K-NA				•	•				
Showerhead & Handshower Package, 2.5 gpm												
K-TS15611-4	Coralais shower trim kit	Lever	Includes showerhead, showerarm, valve trim. Requires K-8304-KS-NA or other K-8304 series options.	2.5			Lever handle ADA	•				
K-99899-Y	Awaken B110 MF handshower kit		includes handshower, hose, slidebar	2.5				•	•			
K-98351	Awaken		with check valve					•	•	•	•	•
K-T97831-4	Coralais Transfer Valve Trim	Lever	Requires K-728-K-NA or K-737-K-NA				•	•				
Showering Trim												
K-630T40-4AG	Triton Bowe industrial exposed shower	Lever	Valve Included	1.75				•				
K-TS6913-2	Triton Rite-Temp pressure-balancing valve trim	Standard	Requires K-8304-KS-NA or other K-8304 series options.					•				
K-TS6913-4		Lever					•	•				
K-T7744-3	Triton wall-mount handle trim	Cross	K-302-K					•				
K-T7744-4		Lever						•				
K-T7751-3	Triton wall-mount handle trim with push-button diverter	Cross						•				
K-T7751-4		Lever						•				

SHOWERING - BUILD YOUR OWN

BUILD YOUR SHOWERING PACKAGE

Determine the showering package you are interested in. For each of the empty boxes associated with that package, select a SKU in that category that best meets your design and/or flow rate preferences.

	PRODUCT CATEGORIES							
SHOWERING PACKAGE	1	2	3	4	5	6	7	8
Showerhead Only								
Showerhead & Handshower								
Handshower Only								

1


MasterShower


Honesty

2


Awaken G90


Awaken B110

3


Coralais


Pitch

4


Coralais


Pitch

Shower Arm & Flange

MasterShower 5-3/8" long
Honesty 5-3/8" long
MasterShower 7-1/2" long
Statement 6-1/2" long

Showerhead

K-7395 Awaken G90, SF, 1.5gpm
K-20005 Awaken G90, SF, 1.75gpm
K-7397 Awaken G90, SF, 2.5gpm
K-26318 Awaken G110, MF, 1.5gpm
Awaken G110, MF, 1.75gpm
Awaken G110, MF, 2.5gpm
Awaken B110, MF, 1.5gpm
Awaken B110, MF, 1.75gpm
Awaken B110, MF, 2.5 gpm
Coralais, SF, 1.5 gpm
Coralais, SF, 1.75 gpm
Coralais, SF, 2.5 gpm

Pressure Balance Shower Trim

(Please also specify K-8304-KS-NA Pressure balance valve w/ service stops)

K-72416 Coralais
K-72417 Pitch
K-72417-Y Tone
K-72419-H Parallel

Transfer Valve Trim

(Please also specify K-728-K-NA Mastershower Transfer Valve)

K-TS15621-4 Coralais
K-TS74042-4 Pitch
K-TS23954-4 Tone
K-TS23501-4 Parallel

Coralais

K-T97831-4
K-T97091-4
K-T23955-4
K-T23509-4

5


Awaken G110


Awaken B110

6


MasterShower

7


Awaken


Purist/Stillness

8


Awaken holder


Awaken Fixed


Awaken Adjustable

Handshower

Awaken G110, MF, 1.5gpm
Awaken G110, MF, 1.75gpm
Awaken G110, MF, 2.5gpm
Awaken B110, MF, 1.5gpm
Awaken B110, MF, 1.75gpm

Handshower Hose

K-72415-H
K-72415-G
K-72415-Y
K-72421-H
K-72421-G

Handshower Supply Elbow

K-9514 Awaken, w/ check valve
K-8593 Purist/Stillness, w/ check valve

Handshower Holder & Slidebars

K-98351 Awaken holder
K-22172 Awaken fixed holder
Awaken adjustable holder
Sillness holder
Awaken Deluxe 24" slidebar
Awaken Deluxe 36" slidebar
24" slidebar
30" slidebar

K-98771 adjustable holder
K-98347 fixed holder
K-98348 adjustable holder
K-975 adjustable holder
K-98342 24", adjustable
K-98343 36"
K-9069 24"
K-8524 30"

Model Number	Description	Handles	Note	Flow Rate (GPM)	CEC	Watersense	ADA	Polished Chrome CP	Vibrant Brushed Nickel BN	Vibrant Brushed Moderne Brass 2MB	Matte Black BL	Additional finishes available (Please see price book and website for detail)
Shower Arm & Flange												
K-7395	MasterShower shower arm, 5-3/8"		1/2" NPT connection					•	•	•	•	•
K-20005	Honesty shower arm, 5-3/8"							•	•	•	•	•
K-7397	MasterShower shower arm, 7-1/2"							•	•	•	•	•
K-26318	Statement shower arm, 6-1/2"							•	•	•	•	•
Showerheads												
K-72416	Awaken showerhead, B90, Single Function		1/2" NPT connection	1.5	•	•		•	•	•	•	•
K-72417				1.75	•	•		•	•	•	•	•
K-72417-Y				2.5				•	•	•	•	
K-72419-H	Awaken showerhead, G110, Multi Function			1.5	•	•		•				
K-72419-G				1.75	•	•		•	•	•	•	•
K-72419-Y				2.5				•	•	•	•	•
K-72425-H	Awaken showerhead, B110, Multi Function			1.5	•	•		•				
K-72425-G				1.75	•	•		•	•			
K-72425-Y				2.5				•	•			
K-11637-H	Coralais showerhead, Single Function			1.5	•	•		•				
K-11637-G				1.75	•	•		•				
K-11637				2.5				•				
Pressure Balance Shower Trim												
K-TS15621-4	Coralais	Lever	Requires K-8304-KS-NA pressure balance valve or other K-8304 series variations.				•	•				
K-TS74042-4	Pitch	Lever					•	•	•	•	•	
K-TS23954-4	Tone	Lever					•	•	•	•	•	•
K-TS23501-4	Parallel	Lever					•	•	•	•	•	•
Transfer Valve Trim												
K-T97831-4	Coralais	Lever	Requires K-728-K-NA or K-737-K-NA				•	•				
K-T97091-4	Pitch	Lever					•	•	•	•	•	
K-T23955-4	Tone	Lever					•	•	•	•	•	•
K-T23509-4	Parallel	Lever					•	•	•	•	•	•
Handshowers												
K-72415-H	Awaken handshower, G110, Multi Function		3 spray functions, Nonpositive shutoff	1.5	•	•	•	•				
K-72415-G				1.75	•	•	•	•	•	•	•	•
K-72415-Y				2.5			•	•	•	•	•	•
K-72421-H	Awaken handshower, B110, Multi Function			1.5	•	•	•	•				
K-72421-G				1.75	•	•	•	•	•			
Handshower Hoses												
K-9514	MasterShower 60", metal							•	•	•	•	•
K-8593	MasterShower 72", metal						•					
Handshower Supply Elbow												
K-98351	Awaken		with check valve					•	•	•	•	•
K-22172	Purist/Stillness		with check valve					•	•	•	•	•
Handshower Holders & Slidebars												
K-98771	Awaken handshower holder		adjustable holder					•	•	•	•	•
K-98347			fixed holder					•	•	•	•	•
K-98348			adjustable holder					•	•	•	•	•
K-975	Stillness handshower holder		adjustable holder					•	•	•	•	•
K-98342	Awaken Deluxe slidebar		24", adjustable				•	•	•	•	•	•
K-98343			36"				•	•	•	•	•	•
K-9069	Slidebar		24"				•	•	•			
K-8524			30"				•	•	•	•	•	•

88

ACCESSORIES


							
Elate accessories (shown Double TP holder)		Coralais accessories (shown TP holder)		Square accessories (shown Double TP holder)		Kumin accessories (shown Double TP holder with cover)	
TP holder	K-27292	TP holder	K-13434	TP holder	K-23292	TP holder w/ cover	K-29221
Double TP holder	K-27289	Robe hook	K-13433	Double TP holder	K-23288	Double TP holder w/ cover	K-29224
Robe hook	K-27290	Towel Ring	K-13435	Robe hook	K-23290	Robe hook	K-97897
Towel Arm	K-27291	18 inch towel bar	K- 13430	Towel Arm	K-23291	Towel Ring	K-97898
18 inch towel bar	K-27286	24 inch towel bar	K-13431	18 inch towel bar	K-23284	18 inch towel bar	K-97878
24 inch towel bar	K-27287	Hotelier	K-13448	24 inch towel bar	K-23285	24 inch towel bar	K-97882
Hotelier	K-27294			Hotelier	K-23299	Hotelier	K-24552

							
Parallel accessories (shown Double TP holder)		Purist accessories (shown TP holder)		Components accessories (shown Double TP holder with cover)		Composed accessories (shown TP holder)	
TP holder	K-23528	TP holder	K-14377	TP holder	K-78382	TP holder	K-73147
Double TP holder	K-21897	Robe hook	K-14443	Double TP holder w/ cover	K-78384	Double Robe hook	K-73146
Robe hook	K-23529	Towel Ring	K-14441	Robe hook	K-78378	Towel Arm	K-73145
Towel Arm	K-23526	18 inch towel bar	K-14435	Towel Arm	K-78377	18 inch towel bar	K-73141
18 inch towel bar	K- 23524	24 inch towel bar	K-14436	18 inch towel bar	K-78372	24 inch towel bar	K-73142
24 inch towel bar	K-23525	Hotelier	K-14381	24 inch towel bar	K-78373	Hotelier	K-73157
Hotelier	K-23530			Hotelier	K-78376		

Collection	Additional variations available	Polished Chrome CP	Vibrant Brushed Nickel BN	Vibrant Brushed Moderne Brass 2MB	Matte Black BL	Additional finishes available (Please see price book and website for detail)
Accessories						
Elate	12 inch towel bar, Vertical toilet paper holder	•	•	•	•	
Coralais		•	•			
Square	12 inch towel bar, Vertical toilet paper holder	•	•	•	•	
Kumin	Horizontal toilet paper holder without cover, 24 inch double towel bar	•	•		•	
Parallel	Vertical toilet paper holder	•	•	•	•	•
Purist	Vertical toilet paper holder, 24 inch double towel bar	•	•	•	•	•
Components	Vertical toilet paper holder, Double towel arm, 24 inch double towel bar ,30 inch towel bar	•	•	•	•	•
Composed	Vertical toilet paper holder, 24 inch double towel bar , 30 inch towel bar	•	•	•	•	•

Select accessories shown. Please reference pricebook and Kohler.com for full offering.

GRAB BARS


							
Contemporary grab bars, ADA		Square grab bars, ADA		Kumin grab bars, ADA		Traditional grab bars, ADA	
12 inch grab bar	K-14560	12 inch grab bar	K-23293	12 inch grab bar	K-24548	12 inch grab bar	K-10540
18 inch grab bar	K-14561	18 inch grab bar	K-23294	18 inch grab bar	K-24549	18 inch grab bar	K-10541
24 inch grab bar	K-14562	24 inch grab bar	K-23295	24 inch grab bar	K-24550	24 inch grab bar	K-10542
36 inch grab bar	K-14564	36 inch grab bar	K-23296	36 inch grab bar	K-24551	36 inch grab bar	K-10544
42 inch grab bar	K-14565	42 inch grab bar	K-23297	42 inch grab bar	K-22824	42 inch grab bar	K-10545

			
Purist grab bars, ADA		Components grab bars, ADA	
12 inch grab bar	K-11891	12 inch grab bar	K-25159
18 inch grab bar	K-11892	18 inch grab bar	K-25160
24 inch grab bar	K-11893	24 inch grab bar	K-78387
36 inch grab bar	K-11895	36 inch grab bar	K-25161
42 inch grab bar	K-11896	42 inch grab bar	K-25162

Collection	Includes	Additional sizes available	ADA	Polished Chrome CP	Vibrant Brushed Nickel BN	Vibrant Brushed Moderne Brass 2MB	Matte Black BL	Additional finishes available (Please see price book and website for detail)
Grab Bars								
Contemporary	Mounting hardware and installation template		•	Use -S	•	•	•	•
Square	Mounting hardware and installation template		•	•	•	•	•	
Kumin	Mounting hardware and installation template		•	•	•		•	
Traditional	Mounting hardware and installation template		•	Use -S	•	•	•	•
Purist	Mounting hardware and installation template	48 inch	•	Use -S	•	•	•	•
Components	Mounting hardware and installation template		•	•	•	•	•	•

Select accessories shown. Please reference pricebook and Kohler.com for full offering.

FOOT CONTROLS & BEDPAN WASHERS

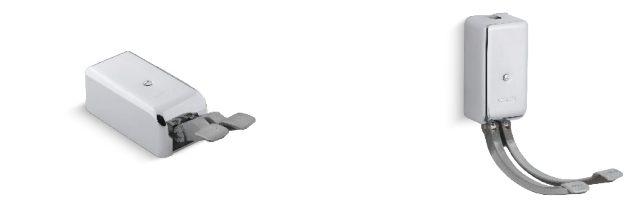

Foot control
Double floor-mount
K-13808



Foot control
Double wall-mount
K-13816



Bedpan washer
With double foot control
K-13960



Bedpan washer
With loose-key stop
K-13925



Triton®
Bedpan washer
K-13931-2A



Polished Chrome
(CP)

FITTINGS - URINAL & TOILET SPACE





Beehive urinal strainer
K-9161-NA




China grate urinal strainer
K-9172-NA




Stainless steel beehive grate urinal strainer
K-9183-NA

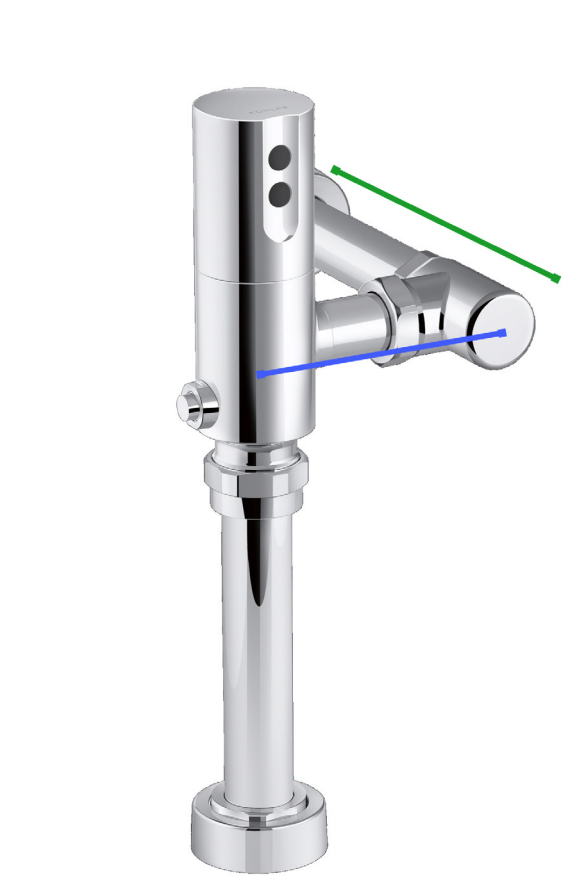

Flushometer Inlet Extension Arm
(For Installations with a rough in dimension of 5-3/4"-7-7/8")
K-1421939-CP



Flushometer Supply Sleeve
(For Installations with a rough in dimension of 5"-12". Can be cut to desired length.)
12" Toilet Supply Sleeve K-1287315
12" Urinal Supply Sleeve K-1421936



Hybrid battery for Mach Wave and Mach Tripoint flushometers
K-1193202

FITTINGS - LAVATORY SPACE

			
Touchless valve and Insight sensor kit	Bathroom sink grid drain with overflow	Undercounter thermostatic mixing valve (for 0.5gpm faucets, cannot be used with 0.35gpm faucets)	Mechanical Mixing Valve
Square (for Memoirs Insight Wall Mount) Hybrid-powered (shown) K-11831-NA AC-powered K-11842-NA Round (for Purist Insight Wall Mount) Hybrid-powered (shown) K-11830-NA AC-powered K-11843-NA	With overflow (shown) Without overflow	K-7129-A K-7129 K-99799-NA	K-24154-RP


Escutcheon plate - Single hole faucet (for Insight™ and Kinesis® faucets)
4" Square (shown right) K-13478-B 4" Round (shown top) K-13478-A 8" Square (shown bottom) K-13479-B 8" Round K-13479-A







Escutcheon plate - 2 hole faucet/soap (for Insight™ and Kinesis® faucets and soap dispensers)
4" Square (shown top) K-38167 4" Round (shown right) K-38169 8" Square K-38166 8" Round (shown bottom) K-38168



Single and 2 hole escutcheons available in CP, BN, BL, 2MB

			
Polished Chrome (CP)	Vibrant® Brushed Nickel (BN)	Vibrant Brushed Moderne Brass (2MB)	Matte Black (BL)

FITTINGS - LAVATORY SPACE

			
Power Units for Accliv touchless faucets (Includes mounting bracket)	Power Units for Kinesis touchless faucets (Installs into faucet control box assembly)	Power Units for Soap Dispensers	Long mounting hardware kit (To be used with Kohler soap dispensers when mounting on Kohler Soho or Greenwich lavatories or counters with thickness between 2" to 4-1/2")
DC battery pack K-36264-NA Hybrid battery pack K-28520-NA	DC battery pack K-1359812 Hybrid battery pack K-1377524	DC battery pack K-26935-NA	K-1383327

		
AC single supply, North American outlets (One per soap dispenser OR faucet)	AC Multi-outlet power supply, North American outlets (See information at bottom of page for more detail))	AC Cable Assemblies (One per soap dispenser OR faucet)
K-13480-A-NA	K-13481-A-NA	4' (shown) K-13487-NA 6' K-13602-NA 10' K-13604-NA

AC Multi-outlet power supply
Supports product combinations of faucets and soap dispensers as detailed below. Each product that will be supplied by this adapter also requires an AC cable assembly. Length of this assembly should be long enough to support the distance from the product to the supply adapter.

- Product Combinations that can be supported by one AC Multi-outlet supply
- 2 soap dispensers (no sensor faucets)
 - 1 sensor faucet and 1 soap dispenser
 - 1 sensor faucet and 2 soap dispensers
 - 2 sensor faucets and 1 soap dispenser
 - 2 sensor faucets and 2 soap dispensers
 - 8 sensor faucets (no soap dispensers)

OPTIONAL AERATORS

COMMERCIAL LOW-FLOW AERATOR OPTIONS		
PART NO.	DESCRIPTION	FOR USE WITH
1160594	Large Spray 0.35 gpm (1.3 l/min) INSERT ONLY	Commercial Spouts: K-13770/82 Coralais®: K-15182 K-15198/99 K-15240/41/43 K-15583
1068613	Large Spray 0.5 gpm (1.9 l/min) INSERT ONLY	
1139283	Large Laminar 1.0 gpm (3.8 l/min) INSERT ONLY	
1103116	Large Aerated 1.5 gpm (5.7 l/min) INSERT ONLY	
1104957	Large Laminar 1.5 gpm (5.7 l/min) INSERT ONLY	
54646	Sealing Washer	
1160595	Medium Spray 0.35 gpm (1.3 l/min) INSERT ONLY	Insight™: K-7514/15 K-13460/61/62/63
1075455	Medium Spray 0.5 gpm (1.9 l/min) INSERT ONLY	
1139284	Medium Aerated 1.0 gpm (3.8 l/min) INSERT ONLY	
1139285	Medium Laminar 1.0 gpm (3.8 l/min) INSERT ONLY	
1097180	Medium Aerated 1.5 gpm (5.7 l/min) INSERT ONLY	
1104546	Medium Laminar 1.5 gpm (5.7 l/min) INSERT ONLY	
79441	Sealing Washer	Insight: K-7518/19 K-T11836/37/38 K-T11839/40/41 K-13472/73/74/75
1160593	Small Spray 0.35 gpm (1.3 l/min) INSERT ONLY	
1075440	Small Spray 0.5 gpm (1.9 l/min) INSERT ONLY	
1139286	Small Aerated 1.0 gpm (3.8 l/min) INSERT ONLY	
1139287	Small Laminar 1.0 gpm (3.8 l/min) INSERT ONLY	
1053576	Small Aerated 1.5 gpm (5.7 l/min) INSERT ONLY	
1053532	Small Laminar 1.5 gpm (5.7 l/min) INSERT ONLY	Insight: K-7516/17 K-13466/67/68/69
78783	Sealing Washer	
PART NO.	DESCRIPTION	FOR USE WITH
1351966	Large Concealed Spray 0.35 gpm (1.3 l/min) INSERT ONLY	Insight: K-7516/17 K-13466/67/68/69
1101643	Large Concealed Spray 0.5 gpm (1.9 l/min) INSERT ONLY	
1139288	Large Concealed Aerated 1.0 gpm (3.8 l/min) INSERT ONLY	
1139289	Large Concealed Laminar 1.0 gpm (3.8 l/min) INSERT ONLY	
1139290	Large Concealed Aerated 1.5 gpm (5.7 l/min) INSERT ONLY	
1100596	Large Concealed Laminar 1.5 gpm (5.7 l/min) INSERT ONLY	
1248366	Small Spray 0.35 gpm (1.3 l/min) INSERT ONLY	July™: K-97282/83
1175310	Small Spray 0.5 gpm (1.9 l/min) INSERT ONLY	
1239012	Small Aerated 1.0 gpm (3.8 l/min) INSERT ONLY	
1219350	Small Laminar 1.0 gpm (3.8 l/min) INSERT ONLY	
1384866	0.35 gpm (1.3 l/min) Aerator Kit, Cache	Strayt™ Touchless: K-103S36-SANA K-103S37-SANA K-104S36-SANA K-104S37-SANA
1384867	0.35 gpm (1.3 l/min) Aerator Kit, Cache	Composed ®Touchless: K-103C36-SANA K-103C37-SANA K-104C36-SANA K-104C37-SANA K-124C36-SANA K-123C36-SANA Kumin ®Touchless: K-103K36-SANA K-103K37-SANA K-104K36-SANA K-104K37-SANA

OPTIONAL AERATORS

TRITON BOWE® COMMERCIAL AERATOR OPTIONS		
PART NO.	DESCRIPTION	FOR USE WITH
1375179-CP	0.35 gpm (1.3 l/min) Aerator Kit, Vandal-Proof	K-100T70-4AKA/-4AKL K-100T70-4ANA/-4ANL K-100T70-5AKA/-5AKL K-100T70-5ANA/-5ANL K-400T20-4AKA/-4AKL K-400T20-4ANA/-4ANL K-400T20-5AKA/-5AKL K-400T20-5ANA/-5ANL
1249046-CP	0.5 gpm (1.9 l/min) Aerator Kit	K-400T20-4AKA/-4AKL K-400T20-4ANA/-4ANL K-400T20-5AKA/-5AKL K-400T20-5ANA/-5ANL K-400T70-4AKA/-4AKL K-400T70-4ANA/-4ANL K-400T70-5AKA/-5AKL K-400T70-5ANA/-5ANL
1249047-CP	0.5 gpm (1.9 l/min) Kit, Laminar	K-800T20-4AKA/-4AKL K-800T20-4ANA/-4ANL K-800T20-5AKA/-5AKL K-800T20-5ANA/-5ANL K-800T70-4AKA/-4AKL K-800T70-4ANA/-4ANL K-800T70-5AKA/-5AKL K-800T70-5ANA/-5ANL
1249048-CP	1.0 gpm (3.8 l/min) Aerator Kit	K-810T20-4AHA/-5AHA K-810T21-4AHA/-5AHA K-810T70-4AHA/-5AHA K-810T71-4AHA/-5AHA K-815T20-4AHA K-815T70-4AHA K-820T70-4AFA/-5AFA
1249049-CP	1.0 gpm (3.8 l/min) Kit, Laminar	K-810T70-4AHA/-5AHA K-810T71-4AHA/-5AHA K-815T20-4AHA K-815T70-4AHA K-820T70-4AFA/-5AFA
PART NO.	DESCRIPTION	FOR USE WITH
1286338-CP	1.5 gpm (5.7 l/min) Aerator Kit	K-100T70-4AKA/-4AKL K-100T70-4ANA/-4ANL K-100T70-5AKA/-5AKL K-100T70-5ANA/-5ANL K-400T20-4AKA/-4AKL K-400T20-4ANA/-4ANL K-400T20-5AKA/-5AKL K-400T20-5ANA/-5ANL K-400T70-4AKA/-4AKL K-400T70-4ANA/-4ANL K-400T70-5AKA/-5AKL K-400T70-5ANA/-5ANL
1286339-CP	1.75 gpm (6.6 l/min) Aerator Kit	K-800T20-4AKA/-4AKL K-800T20-4ANA/-4ANL K-800T20-5AKA/-5AKL K-800T20-5ANA/-5ANL K-800T70-4AKA/-4AKL K-800T70-4ANA/-4ANL K-800T70-5AKA/-5AKL K-800T70-5ANA/-5ANL
1249482-CP	2.0 gpm (7.6 l/min) Aerator Kit	K-810T20-4AHA/-5AHA K-810T21-4AHA/-5AHA K-810T70-4AHA/-5AHA K-810T71-4AHA/-5AHA K-815T20-4AHA K-815T70-4AHA K-820T70-4AFA/-5AFA

KOHLER LAVATORY & SINK SPACE X-REF					Toto	Sloan	Zurn	ASB	KOHLER LAVATORY & SINK SPACE X-REF					Toto	Sloan	Zurn	ASB
IMAGE	DESCRIPTION	VARIATION	KOHLER SKU	SKU	SKU	SKU	SKU	SKU	IMAGE	DESCRIPTION	VARIATION	KOHLER SKU	SKU	SKU	SKU	SKU	SKU
	Accliv touchless faucet	0.5 gpm, must order power. No drain, mixer, or supply line.	103A36-SBNA-CP	No comparable cross	EAF-300-PLG-CP-0.5GPM	No comparable cross	775B.105			Components wall mount touchless faucet with Kinesis sensor technology	0.5 gpm, AC-powered, Single Supply	123M36-SANA-CP	No comparable cross	ETF-810-PLG-TEE-CP-0.5GPM	No comparable cross	No comparable cross	No comparable cross
		0.35 gpm, must order power. No drain, mixer, or supply line.	103A36-SBTA-CP	No comparable cross	EAF-300-PLG-CP-0.35GPM	No comparable cross	775B.103				0.5 gpm, Hybrid-powered, Single Supply	126M36-SANA-CP	TEL1C5	No comparable cross	No comparable cross	No comparable cross	
	Kumin touchless faucet with Kinesis sensor technology	0.5 gpm, AC-powered, Temperature Mixer	103K37-SANA-CP	T28S51AM	SF-2100-4-PLG-BDM-CP-0.5GPM SF-2400-4-PLG-BDM-CP-0.5GPM ETF-880-4-BOX-BDM-CP-0.5GPM	Z6950-XL-S-MV-ACA	775B.105, Power PK00.PAC Mixer 605XTMV1070			Composed wall mount touchless faucet with Kinesis sensor technology	0.5 gpm, DC-powered, Single Supply	124C36-SANA-CP	No comparable cross	EFX-850-BAT-TEE-CP-0.5GPM	No comparable cross	No comparable cross	No comparable cross
		0.5 gpm, DC-powered, Temperature Mixer	104K37-SANA-CP	No comparable cross	SF-2150-4-BAT-BDM-CP-0.5GPM SF-2450-4-BAT-BDM-CP-0.5GPM EBF-187-4-BAT-BDM-CP-0.5GPM	Z6950-XL-S-MV-B	775B.105, Power PK00.WRK Mixer 605XTMV1070				0.5 gpm, AC-powered, Single Supply	123C36-SANA-CP	No comparable cross	EFX-800-PLG-TEE-CP-0.5GPM	No comparable cross	No comparable cross	
		0.5 gpm, Hybrid-powered, Temperature Mixer	106K37-SANA-CP	T28S51EM	No comparable cross	No comparable cross	775B.105, Power PK00.WRK Mixer 605XTMV1070				0.5 gpm, Hybrid-powered, Single Supply	126C36-SANA-CP	TEL1C5	No comparable cross	No comparable cross	No comparable cross	
		0.5 gpm, AC-powered, Single Supply	103K36-SANA-CP	T28S51A	SF-2100-4-PLG-TEE-CP-0.5GP SF-2400-4-PLG-TEE-CP-0.5GPM ETF-880-4-PLG-TEE-CP-0.5GPM	Z6950-XL-S-ACA	775B.105, Power PK00.PAC				0.5 gpm, DC-powered, Single Supply	124B16-SANA-CP	No comparable cross	EBF-825-BAT-TEE-CP-0.5GPM	Z6957-XL-N	T064.355	
		0.5 gpm, DC-powered, Single Supply	104K36-SANA-CP	No comparable cross	SF-2150-4-BAT-TEE-CP-0.5GPM SF-2450-4-BAT-TEE-CP-0.5GPM EAF-350-BAT-CP-0.5GPM	Z6950-XL-S-B	775B.105, Power PK00.WRK				0.5 gpm, Hybrid-powered, Single Supply	126B16-SANA-CP	T26L53	EBF-825-TUR-TEE-CP-0.5GPM	Z6957-XL-N-M	T064.345	
		0.5 gpm, Hybrid-powered, Single Supply	106K36-SANA-CP	T28S51E	No comparable cross	No comparable cross	775B.105, Power PK00.WRK				0.5 gpm, DC-powered, Single Supply	124L36-SANL-CP	No comparable cross	EFX-850-BAT-TEE-CP-0.5GPM	No comparable cross	No comparable cross	
		0.35 gpm, AC-powered, Single Supply	103K36-SATA-CP	T28S32A	SF-2100-4-PLG-TEE-CP-0.35GPM SF-2400-4-PLG-TEE-CP-0.35GPM	Z6950-XL-S-M-ACA	775B.103, Power PK00.PAC				0.5 gpm, AC-powered, Single Supply	123L36-SANL-CP	No comparable cross	EFX-800-PLG-TEE-CP-0.5GPM	No comparable cross	No comparable cross	
		0.35 gpm, DC-powered, Single Supply	104K36-SATA-CP	No comparable cross	SF-2150-4-BAT-TEE-CP-0.35GPM SF-2450-4-BAT-TEE-CP-0.35GPM EAF-350-BAT-CP-0.5GPM	No comparable cross	775B.103, Power PK00.WRK				0.5 gpm, Hybrid-powered, Single Supply	126L36-SANL-CP	TEL1D5	No comparable cross	No comparable cross	No comparable cross	
	Strayt touchless faucet with Kinesis sensor technology	0.5 gpm, AC-powered, Temperature Mixer	103S37-SANA-CP	T25S51AM	ETF-410-4-PLG-BDM-CP-0.5GPM	Z6953-XL-CV-MV	702B.105, Power PK00.PAC Mixer 605XTMV1070			Purist touchless faucet with insight sensor technology - 8 - 1/4\" data-bbox="540 245 575 285"/>	0.5 gpm, AC-powered (with 11843-NA Valve) OR Hybrid-Powered (with 11830-NA valve)	T11837-CP	TEL135-D10E#CP	ETF-820-PLG-TEE-CP-0.5GPM	No comparable cross	No comparable cross	T06B.305, Power PK00.PAC
		0.5 gpm, DC-powered, Temperature Mixer	104S37-SANA-CP	No comparable cross	EBF-415-4-BAT-BDM-CP-0.5GPM	No comparable cross	No comparable cross	0.5 gpm, AC-powered (with 11843-NA Valve) OR Hybrid-Powered (with 11830-NA valve)			T11840-CP	TEL135-D10E#CP	No comparable cross	No comparable cross	T06B.305, Power PK00.PAC		
		0.5 gpm, Hybrid-powered, Temperature Mixer	106S37-SANA-CP	T25S51EM	EBF-415-TUR-BDM-CP-0.5GPM	Z6953-XL-MV	702B.105, Power PK00.WRK Mixer 605XTMV1070			Composed wall mount touchless foaming soap dispenser	DC-powered	22847-CP	No comparable cross	No comparable cross	No comparable cross	No comparable cross	
		0.5 gpm, AC-powered, Single Supply	103S36-SANA-CP	T25S51A	ETF-410-4-PLG-TEE-CP-0.5GPM	Z6953-XL-CV	702B.105, Power PK00.PAC				AC-powered	22848-CP	No comparable cross	No comparable cross	No comparable cross	No comparable cross	
		0.5 gpm, DC-powered, Single Supply	104S36-SANA-CP	No comparable cross	EBF-415-BAT-TEE-CP-0.5GPM	No comparable cross	No comparable cross			Composed touchless foaming soap dispenser	DC-powered	25195-CP	No comparable cross	ESD-500	Z6953-SD	No comparable cross	
		0.5 gpm, Hybrid-powered, Single Supply	106S36-SANA-CP	T25S51E	EBF-415-TUR-TEE-CP-0.5GPM	Z6953-XL	702B.105, Power PK00.WRK Mixer 605XTMV1070				AC-powered	25198-CP	TES20(1/2/3)AE	No comparable cross	Z6953-SD	No comparable cross	
		0.35 gpm, AC-powered, Single Supply	103S36-SATA-CP	T25S32A	ETF-410-PLG-TEE-CP-0.35GPM	Z6953-XL-CV-M	702B.103, Power PK00.PAC			Angle wall mount touchless foaming soap dispenser	DC-powered	25193-CP	No comparable cross	ESD-500	No comparable cross	No comparable cross	No comparable cross
		0.35 gpm, DC-powered, Single Supply	104S36-SATA-CP	No comparable cross	EBF-415-BAT-TEE-CP-0.35GPM	No comparable cross	No comparable cross				AC-powered	25196-CP	No comparable cross	No comparable cross	No comparable cross	No comparable cross	
	Oblio touchless faucet with Kinesis sensor technology	0.5 gpm, AC-powered, Temperature Mixer	103B77-SANA-CP	T26S51AM	ETF-700-4-PLG-BDT-CP-0.5GPM	No comparable cross	No comparable cross			Curve wall mount touchless foaming soap dispenser	DC-powered	25194-CP	No comparable cross	ESD-250	No comparable cross	7770100	
		0.5 gpm, DC-powered, Temperature Mixer	104B77-SANA-CP	No comparable cross	No comparable cross	No comparable cross	No comparable cross				AC-powered	25197-CP	TES20(4/5)AA	ESD-200	Z6950-SD	No comparable cross	
		0.5 gpm, AC-powered, Single Supply	103B76-SANA-CP	T26S51A	SF-2200-4-PLG-TEE-CP-0.5GPM	No comparable cross	No comparable cross			Brenham 21 15/16\" data-bbox="535 475 580 515"/>	Single Hole	1997-1-0	No comparable cross	SS-3165	Z5341	0955001EC.020	
		0.5 gpm, DC-powered, Single Supply	104B76-SANA-CP	No comparable cross	EFX-2250-4-BAT-TEE-CP-0.5GPM	No comparable cross	No comparable cross				4\" data-bbox="535 515 580 555"/>	1997-4-0	No comparable cross	SS-3065	Z5344	0954004EC.020	
		0.5 gpm, Hybrid-powered, Single Supply	106B76-SANA-CP	T26S51E	No comparable cross	No comparable cross	No comparable cross				8\" data-bbox="535 555 580 595"/>	1997-8-0	No comparable cross	SS-3865	Z5348	0958008EC.020	
		0.5 gpm, AC-powered, Temperature Mixer	103L77-SANL-CP	T24S51AM	EFX-100-BOX-ISM-CP-0.5GPM EFX-200-4-PLG-ISM-CP-0.5GPM	No comparable cross	No comparable cross			Brenham Shroud	Shroud	1998-0	No comparable cross	SS-27-A	Z6900-VG	0062000.020	
		0.5 gpm, DC-powered, Temperature Mixer	104L77-SANL-CP	No comparable cross	EFX-150-4-BAT-BDT-CP-0.5GPM	No comparable cross	No comparable cross				4\" data-bbox="535 635 580 675"/>	2005-0	LT307.4#01	SS-3003	Z5344	355012.020	
		0.5 gpm, Hybrid-powered, Temperature Mixer	106L77-SANL-CP	T24S51EM	No comparable cross	No comparable cross	No comparable cross				8\" data-bbox="535 675 580 715"/>	2006-0	LT307.8#01	SS-3803	Z5348	356901.020	
	Loure touchless faucet with Kinesis sensor technology	0.5 gpm, AC-powered, Single Supply	103L76-SANA-CP	T24S51A	EFX-100-PLG-TEE-CP-0.5GPM EFX-200-4-PLG-TEE-CP-0.5GPM	No comparable cross	No comparable cross			Soho 20\" data-bbox="535 715 580 755"/>	Single Hole	2007-0	LT307#01	SS-3103	Z5341	356421.020	
		0.5 gpm, DC-powered, Single Supply	104L76-SANL-CP	No comparable cross	EFX-150-BAT-TEE-CP-0.5GPM	No comparable cross	No comparable cross				4\" data-bbox="535 755 580 795"/>	2054-0	No comparable cross	SS-3006	Z5314	9024004EC.020	
		0.5 gpm, Hybrid-powered, Single Supply	106L76-SANL-CP	T24S51E	No comparable cross	No comparable cross	No comparable cross				8\" data-bbox="535 795 580 835"/>	2053-0	No comparable cross	SS-3806	Z5318	9024008EC.020	
		0.5 gpm, AC-powered, Single Supply	103M37-SANA-CP	T25T51AM	SF-2900-4-PLG-BDM-CP-0.5GPM-MLM-FCT (Laminar)	No comparable cross	No comparable cross			Caxton 17\" data-bbox="535 835 580 875"/>	Undermount, Overflow, Rear Drain	2210-0	LT569	SS-3001	Z5220	9482000.020	
		0.5 gpm, DC-powered, Single Supply	104M37-SANA-CP	No comparable cross	SF-2950-4-BAT-BDM-CP-0.5GPM-MLM-FCT (Laminar)	No comparable cross	No comparable cross				Undermount, Overflow, Rear Drain	2211-0	LT587	SS-3001	Z5220	0497221.020	
		0.5 gpm, Hybrid-powered, Single Supply	106M37-SANA-CP	T25T51EM	No comparable cross	No comparable cross	No comparable cross			Caxton 17-5/8\" data-bbox="535 875 580 915"/>	Undermount, Overflow, Center Drain	20000-0	No comparable cross	SS-3021	No comparable cross	0614200.020	
		0.5 gpm, AC-powered, Single Supply	103M36-SANA-CP	T25T51A	SF-2900-4-PLG-BDM-CP-0.5GPM-MLM-FCT (Laminar)	No comparable cross	No comparable cross				Undermount, Overflow, Center Drain	2882-0	LT191	No comparable cross	No comparable cross	0330000.020	
		0.5 gpm, DC-powered, Single Supply	104M36-SANA-CP	No comparable cross	SF-2950-4-BAT-TEE-CP-0.5GPM-MLM-FCT (Laminar)	No comparable cross	No comparable cross			Verticyl 17-1/4\" data-bbox="535 915 580 955"/>	Drop in, Single Hole	2196-1-0	LT401	SS-3102	Z5111	0475047.020	
0.5 gpm, Hybrid-powered, Single Supply	106M36-SANA-CP	T25T51E	No comparable cross	No comparable cross	No comparable cross		Drop in, 4\" data-bbox="535 955 580 995"/>	2196-4-0			LT401.4	SS-3002	Z5114	0476028.020			
0.35 gpm, AC-powered, Single Supply	103M36-SATA-CP	T25T32A	SF-2900-4-PLG-TEE-CP-0.35GPM-MLM-FCT (Laminar)	No comparable cross	No comparable cross		Drop in, 8\" data-bbox="535 995 580 1000"/>	2196-8-0			LT401.8	SS-3802	Z5118	0475020.020			
	Components touchless faucet with Kinesis sensor technology	0.5 gpm, AC-powered, Single Supply	104M36-SANA-CP	No comparable cross	SF-2950-4-BAT-TEE-CP-0.5GPM-MLM-FCT (Laminar)	No comparable cross	No comparable cross			Pennington 20\" data-bbox="535 795 580 835"/>	Drop in, Single Hole	2196-1-0	LT401	SS-3102	Z5111	0475047.020	
		0.5 gpm, DC-powered, Single Supply	104M36-SANA-CP	No comparable cross	SF-2950-4-BAT-TEE-CP-0.5GPM-MLM-FCT (Laminar)	No comparable cross	No comparable cross				Drop in, 4\" data-bbox="535 835 580 875"/>	2196-4-0	LT401.4	SS-3002	Z5114	0476028.020	
		0.35 gpm, AC-powered, Single Supply	103M36-SATA-CP	T25T32A	SF-2900-4-PLG-TEE-CP-0.35GPM-MLM-FCT (Laminar)	No comparable cross	No comparable cross			Whitby Service Sink, 28\" data-bbox="540 950 575 990"/>	Drop in, 8\" data-bbox="535 875 580 915"/>	2196-8-0	LT401.8	SS-3			

KOHLER® TOILET & URINAL SPACE X-REF					Toto	Sloan	Zurn	ASB			
Touchless Flushometer	IMAGE	DESCRIPTION	VARIATION	KOHLER SKU	SKU	SKU	SKU	SKU			
		Mach Tripoint exposed flushometer PISTON	1.6 gpf, Hybrid-powered	10TH00R10-CP	TET1GA32#CP	PISTON: No comparable cross DIAPHRAGM: SOLIS 8111-1.6	PISTON: ZTR6200-WS1-LL DIAPHRAGM: No comparable cross	PISTON: 6066161.002 DIAPHRAGM: No comparable cross			
			1.6 gpf, DC-powered	10TD00R10-CP	No comparable cross	PISTON: GEM-2 111 SF5M-1.6; 111 SMO-1.6 DIAPHRAGM: G2 8111-1.6; G2 8112-1.6	PISTON: ZTR6200-WS1 DIAPHRAGM: ZER6000AV-WS1	PISTON: 6065161.002 DIAPHRAGM: 6147SM161.002			
			1.28 gpf, Hybrid-powered	10TH00N10-CP	TET1LA32#CP	PISTON: No comparable cross DIAPHRAGM: SOLIS 8111-1.28	PISTON: ZTR6200-EV-LL DIAPHRAGM: No comparable cross	PISTON: 6066121.002 DIAPHRAGM: No comparable cross			
			1.28 gpf, DC-powered	10TD00N10-CP	No comparable cross	PISTON: GEM-2 111 SF5M-1.28; 111 SMO-1.28 CROWN 111 SF5M-1.28; 111 SMO-1.28 DIAPHRAGM: G2 8111-1.6	PISTON: ZTR6200-EV DIAPHRAGM: ZER6000AV-HET	PISTON: 6065121.002 DIAPHRAGM: 6147SM121.002			
			1.0 gpf, Hybrid-powered	10TH00K10-CP	TET1UA32CP	No comparable cross	No comparable cross	No comparable cross			
			1.0 gpf, DC-powered	10TD00K10-CP	No comparable cross	No comparable cross	No comparable cross	No comparable cross			
Manual Flushometer		Primme manual flushometer PISTON	1.6 gpf	76322-CP	TMT1NNC-32#CP	PISTON: CROWN 111-1.6; CROWN II 111-1.6 113-1.6 GEM-2 111-1.6; 112-1.6 DIAPHRAGM: ROYAL 111-1.6; 112-1.6 ROYAL II 111-1.6; REGAL 111-1.6	PISTON: Z6200-WS1 DIAPHRAGM: Z6000AV-WS1	PISTON: 6047161.002 DIAPHRAGM: 6147161.002			
			1.28 gpf	76321-CP	TMT1LN32#CP	PISTON: CROWN 111-1.28; GEM-2 111-1.28 DIAPHRAGM: ROYAL 111-1.28; ROYAL II 111-1.28 REGAL 111-1.28	PISTON: No comparable cross DIAPHRAGM: Z6000AV-HET	PISTON: 6047121.002 DIAPHRAGM: 6147121.002			
Wall Mount, Rear Outlet		Kingston Ultra 4-Bolt	1.0 gpf - 1.6 gpf, Top Spud	84325-0	CT708U#01	ST-2459	Z5615-BWL	2257101.020			
			1.0 gpf - 1.6 gpf, Top Spud, Antimicrobial	84325-SS-0	CT708UG	No comparable cross	Z5615-BWL-AM	3351101.020			
			1.0 gpf - 1.6 gpf, Top Spud, w/ Lugs	84325-L-0	No comparable cross	ST-2459-BPL	Z5616-BWL	2633101.020			
			1.0 gpf - 1.6 gpf, Top Spud, w/ Lugs, Antimicrobial	84325-SSL-0	No comparable cross	ST-2459-BPL-STG	No comparable cross	3352101.020			
			1.1 gpf - 1.6 gpf, Rear Spud	84323-0	CT708UV#01	ST-2469	Z5690	2634101.020			
			1.1 gpf - 1.6 gpf, Rear Spud, Antimicrobial	84323-SS-0	CT708UVG	ST-2469-STG	Z5617-BWL	3353101.020			
		Kingston 3-Bolt	1.28 gpf - 1.6 gpf, Top Spud	84434-0	No comparable cross	No comparable cross	No comparable cross	3445J.101			
			1.28 gpf - 1.6 gpf, Rear Spud	84454-0	No comparable cross	No comparable cross	No comparable cross	3445L.101			
			Floor mount, Floor Outlet		Highcliff Ultra	1.0 gpf - 1.6 gpf, Top Spud	96057-0	CT705ULN	ST-2029	Z5665-BWL1	3043001.020
						1.0 gpf - 1.6 gpf, Top Spud, Antimicrobial	96057-SS-0	CT705ULNG	No comparable cross	Z5665-BWL-AM	3461001.020
1.0 gpf - 1.6 gpf, Top Spud, w/ Lugs	96057-L-0	No comparable cross				ST-2029-BPL	Z5666-BWL1	3248001.020			
1.0 gpf - 1.6 gpf, Top Spud, w/ Lugs, Antimicrobial	96057-SSL-0	No comparable cross				ST-2029-BPL-STG	Z5666-BWL-AM	3462001.020			
1.28 gpf - 1.6 gpf, Rear Spud	96058-0	No comparable cross				ST-2039	Z5667-BWL1	3249001.020			
1.28 gpf - 1.6 gpf, Rear Spud, Antimicrobial	96058-SS-0	No comparable cross				ST-2039-BPL	Z5667-BWL-AM	3463001.020			
1.28 gpf - 1.6 gpf, Rear Spud, w/ Lugs	96058-L-0	No comparable cross		No comparable cross	No comparable cross	3464001.020					
	Wellcome Ultra	1.0 gpf - 1.6 gpf, Top Spud		96053-0	CT705UN	ST-2009	Z5655-BWL1	2234001.020			
		1.0 gpf - 1.6 gpf, Top Spud, Antimicrobial		96053-SS-0	CT705UNG	ST-2009-STG	Z5655-BWL1-AM	3451001.020			
		1.0 gpf - 1.6 gpf, Top Spud, w/ Lugs		96053-L-0	No comparable cross	No comparable cross	Z5656-BWL1	2623001.020			
		1.0 gpf - 1.6 gpf, Top Spud, w/ Lugs, Antimicrobial	96053-SSL-0	No comparable cross	No comparable cross	Z5656-BWL1-AM	3452001.020				
	Juvenile Ultra	1.28 gpf - 1.6 gpf, Rear Spud	96054-0	No comparable cross	ST-2019	Z5657-BWL	2624001.020				
		1.28 gpf - 1.6 gpf, Rear Spud, Antimicrobial	96054-SS-0	No comparable cross	ST-2019-STG	Z5657-BWL-AM	3453001.020				
	Primary	1.0 gpf - 1.6 gpf, Top Spud, 13.75"	96059-0	No comparable cross	No comparable cross	Z5654-BWL1	2599001.020				
		1.0 gpf - 1.6 gpf, Top Spud, 13.75", Antimicrobial	96059-SS-0	No comparable cross	No comparable cross	No comparable cross	No comparable Cross				
	Bardon washdown	1.28 gpf - 1.6 gpf, Top Spud, 10.5", w/ Seat	96064-0	No comparable cross	ST-2309	Z5675-BWL	No comparable Cross				
		1.28 gpf - 1.6 gpf, Top Spud, 10.5", w/ Seat, Antimicrobial	96064-SS-0	No comparable cross	ST-2309-STG	No comparable cross	No comparable Cross				
Floor mount, Rear Outlet		Anglesey	1.28 gpf - 1.6 gpf, Top Spud	4352-0	No comparable cross	ST-2229	No comparable cross	3312001.020			
			1.28 gpf - 1.6 gpf, Top Spud, w/ Lugs	4352-L-0	No comparable cross	ST-2229-BPL	Z5646-BWL	3313001.020			
			1.28 gpf - 1.6 gpf, Top Spud, Antimicrobial	4352-SS-0	No comparable cross	No comparable cross	Z5645-BWL	No comparable cross			
			1.6, Top Spud	4386-0	No comparable cross	No comparable cross	Z5635-BWL	No comparable cross			
			1.6, Top Spud, w/ Lugs	4386-L-0	No comparable cross	No comparable cross	No comparable cross	No comparable cross			
			1.6 gpf, Rear Spud	4396-0	No comparable cross	No comparable cross	Z5637-BWL	No comparable cross			
			1.6 gpf, Top Spud, w/ Integral Seat	4388-0	No comparable cross	No comparable cross	No comparable cross	No comparable cross			
			1.6 gpf, Rear Spud, w/ Integral Seat	4398-0	No comparable cross	No comparable cross	No comparable cross	No comparable cross			
		Modflex	1.28 gpf - 1.6 gpf, Top Spud, Antimicrobial	25042-SS-0	No comparable cross	No comparable cross	No comparable cross	No comparable Cross			
			1.28 gpf - 1.6 gpf, Rear Spud, Antimicrobial	25044-SS-0	No comparable cross	No comparable cross	No comparable cross	No comparable Cross			

KOHLER® TOILET & URINAL SPACE X-REF					Toto	Sloan	Zurn	ASB	
2 piece (Tank/bowl)	IMAGE	DESCRIPTION	VARIATION	KOHLER SKU	SKU	SKU	SKU	SKU	
		Kingston	1.28 gpf, Elongated, Gravity	25077-0 (25076 / 25100)	CST744E#01	No comparable cross	5555-K	221AA104.020 215AA104.020	
			1.28 gpf, Elongated, Gravity	25087-0 (25086 / 25100)	CST744EL#01	No comparable cross	5535-K	221CA104.020 215CA104.020	
		Barrington	1.0 gpf, Elongated, Comfort Height, Rear Outlet, Pressure Lite	3578-0 (4305 / 4484)	No comparable cross	No comparable cross	No comparable cross	2878100.020	
			1.0 gpf, Elongated, Rear Outlet, Pressure Lite	3652-0 (4327 / 4484)	No comparable cross	No comparable cross	No comparable cross	2876100.020	
			1.6 gpf, Elongated, Rear Outlet, Pressure Lite	3554-0 (4327 / 4645)	No comparable cross	No comparable cross	No comparable cross	2876016.020	
		Highline	1.0 gpf, Elongated, Comfort Height, Pressure Lite	3519-0 (4304 / 4484)	No comparable cross	WETS-8029.8016	Z5561	2467100.020	
1.6 gpf, Elongated, Comfort Height, Pressure Lite			3493-0 (4304 / 4645)	No comparable cross	WETS-8029.8013	Z5560	2467016.020		
	Wellworth	1.0 gpf, Elongated, Pressure Lite	3531 (4303 / 4484)	No comparable cross	WETS-8009.8016	Z5571	2462100.020		
		1.6 gpf, Elongated, Pressure Lite	3505 (4303 / 4645)	No comparable cross	WETS-8009.8013	Z5570	2462016.020		
Toilet Seats		Stronghold Toilet Seat	Elongated, Check hinge, Integrated handle	4731-C-0	SC534	No comparable cross	Z5955SS-EL	5901100.020	
			Elongated, Check hinge, Integrated handle, Antimicrobial	4731-CA-0	No comparable cross	No comparable cross	Z5955SS-EL-AM	5901100SS.020 5901110T.020	
		Lustra Toilet Seat	Elongated, Check hinge	4670-C-0	SC534	No comparable cross	Z5955SS-EL	5901100.020	
			Elongated, Check hinge, Antimicrobial	4670-CA-0	No comparable cross	No comparable cross	Z5955SS-EL-AM	5901100SS.020 5901110T.020	
			Elongated, Open front w/ Lid	4650-0	SC134	No comparable cross	Z5957SS-EL	No comparable cross	
			Elongated, Open front w/ Lid, Antimicrobial	4650-A-0	No comparable cross	No comparable cross	Z5957SS-EL-AM	No comparable cross	
	Touchless Flushometer		Mach Tripoint exposed flushometer PISTON	1.0 gpf, Hybrid-powered	10UH00K20-CP	TEU1GA12#CP	PISTON: No comparable cross DIAPHRAGM: SOLIS 8186-1.0	PISTON: ZTR6203-WS1-LL DIAPHRAGM: No comparable cross	PISTON: 6064101.002 DIAPHRAGM: No comparable cross
				1.0 gpf, DC-powered	10UD00K20-CP	No comparable cross	CROWN 186 SMO-1.0; 186 SMOOTH-1.0 GEM-2 186 SMO-1.0; 186 SF5M-1.0 DIAPHRAGM: ZER6003AV-TM-WS1	PISTON: ZTR6203-WS1 DIAPHRAGM: ZER6003AV-TM-WS1	PISTON: 6063101.002 DIAPHRAGM: 6145SM101.002
0.5 gpf, Hybrid-powered				10UH00G20-CP	TEU1LA12#CP	PISTON: No comparable cross DIAPHRAGM: SOLIS 8186-0.5	PISTON: ZTR6203-EWS-LL DIAPHRAGM: No comparable cross	PISTON: 604051.002 DIAPHRAGM: No comparable cross	
0.5 gpf, DC-powered				10UD00G20-CP	No comparable cross	PISTON: CROWN 186 SMO-0.5; 186 SF5M-0.5 186 SMOOTH-0.5; 186 SF5M-0.5 DIAPHRAGM: ZER6003AV-TM-EWS	PISTON: ZTR6203-EWS DIAPHRAGM: ZER6003AV-TM-EWS	PISTON: 6063051.002 DIAPHRAGM: 6145SM051.002	
0.125 gpf, Hybrid-powered				10UH00D20-CP	TEU1UA12#CP	PISTON: No comparable cross DIAPHRAGM: SOLIS 8186-0.125	PISTON: ZTR6203-ULF-LL DIAPHRAGM: No comparable cross	PISTON: 6064013.002 DIAPHRAGM: No comparable cross	
0.125 gpf, DC-powered				10UD00D20-CP	No comparable cross	PISTON: CROWN 186 SMO-0.125; 186 SF5M-0.125 GEM-2 186 SF5M-0.125 DIAPHRAGM: ZER6003AV-TM-ULF	PISTON: ZTR6203-ULF DIAPHRAGM: ZER6003AV-TM-ULF	PISTON: 6063013.002 DIAPHRAGM: 6145SM013.002	
Manual Flushometer		Primme manual flushometer PISTON	1.0 gpf	76319-CP	TMU1NNC-12	PISTON: CROWN 186-1.0; II 186-1.0 GEM-2 186-1.0 DIAPHRAGM: ROYAL 186-1.0; 188-1.0 REGAL 186-1.0	PISTON: Z6203-WS1 DIAPHRAGM: Z6003AV-WS1	PISTON: 6045101.002 DIAPHRAGM: 6145011.002	
			0.5 gpf	76318-CP	TMU1LN12#CP	PISTON: CROWN 186-0.5; CROWN II 186-0.5 GEM-2 186-0.5 DIAPHRAGM: ROYAL 186-0.5; 188-0.5 REGAL 186-0.5	PISTON: Z6203-EWS DIAPHRAGM: Z6003AV-EWS	PISTON: 6045051.002 DIAPHRAGM: 6145051.002	
			0.125 gpf	76317-CP	No comparable cross	PISTON: CROWN 186-0.125; GEM-2 186-0.125 DIAPHRAGM: ROYAL 186-0.125; REGAL 186-0.125	PISTON: No comparable cross DIAPHRAGM: Z6003AV-ULF	PISTON: 6045013.002 DIAPHRAGM: 6145013.002	
		Bardon washdown	0.125 gpf - 1.0 gpf, Top Spud	4991-ET-0	UT447E#01 UT445U#01	SU-1009	Z5755-U	6590001.020	
			0.125 gpf - 1.0 gpf, Top Spud, Antimicrobial	4991-ETSS-0	No comparable cross	SU-1009-STG	No comparable cross	6590001EC.020	
			0.125 gpf - 1.0 gpf, Rear Spud	4991-ER-0	UT447EV#01 UT445UV#01	SU-1019	Z5765-U	6515001.020	
			0.125 gpf - 1.0 gpf, Rear Spud, Antimicrobial	4991-ERSS-0	No comparable cross	SU-1019-STG	No comparable cross	No comparable cross	
		Dexter washdown	0.125 gpf, Top Spud	5452-ET-0	No comparable cross	SU-7009	Z5738-U	6002001.020	
			0.125 gpf, Rear Spud	5452-ER-0	No comparable cross	SU-7019	No comparable cross	No comparable cross	
			0.5 gpf - 1.0 gpf, Top Spud	5016-ET-0	No comparable cross	No comparable cross	Z5730	6550001.020	
			0.5 gpf - 1.0 gpf, Top Spud, Antimicrobial	5016-ETSS-0	No comparable cross	No comparable cross	No comparable cross	No comparable cross	
			0.5 gpf - 1.0 gpf, Rear Spud	5016-ER-0	No comparable cross	No comparable cross	No comparable cross	No comparable cross	
		Tend washdown	0.125 gpf - 1.0 gpf, Top Spud	20713-ET-0	UT105U SU-7409 UT104E	SU-7009 SU-7409 SU-7409-STG SU-7409-STG	Z5708-U Z5730	6002001.020 6581001.020 6550001.020	
			0.125 gpf - 1.0 gpf, Top Spud, Antimicrobial	20713-ETSS-0	UT105UG	SU-7009-STG SU-7409-STG	No comparable cross	6581001EC.020	
			0.125 gpf - 1.0 gpf, Rear Spud	20713-ER-0	UT105UV SU-7419	SU-7019 SU-7419	No Comparable cross	No comparable cross	
	Bardon Touchless integrated flushometer	0.5 gpf, Rear Spud	32590-0	UE906UVG	No comparable cross	No comparable cross	No comparable Cross		



LAVATORY

TOILET

URINAL

BACK OF HOUSE

LAVATORY

TOILET

URINAL

BACK OF HOUSE

									
Coralais Faucet 0.5 GPM 15198-4RA-CP	Kumin Touchless Faucet 0.5 GPM, DC-Powered Single Supply 104K36-SANA-CP	Curve Touchless Soap Dispenser DC-Powered, Foam Soap 25194-CP	Kingston WM Lavatory Single Hole 2007-0 (No soap hole - <i>shown</i>) 2007-L-0 (w/ Left-hand soap hole) 2007-R-0 (w/ Right-hand soap hole) 4" Centerset 2005-0 (No soap hole)	Caxton Oval UM Lavatory 2210-0	July Faucet 0.5 GPM 97283-4-CP	Strayt Touchless Faucet 0.5 GPM, DC-Powered Single Supply 104S36-SANA-CP	Angle Touchless Soap Dispenser DC-Powered, Foam Soap 25193-CP	Soho WM Lavatory Single Hole 2084-0 (No soap hole - <i>shown</i>) 2084-L-0 (w/ Left-hand soap hole) 2084-R-0 (w/ Right-hand soap hole)	Caxton Rectangle UM Lavatory 20000-0
									
Kingston Toilet 2pc Gravity 25100-0 / 25076-0 (1.28 GPF)	Wellworth Toilet 2pc Pressure Assist 4484-0 / 4303-0 (1.0 GPF) 4645-0 / 4303-0 (1.6 GPF)	Highline Toilet 2pc Pressure Assist 4484-0 / 4304-0 (1.0 GPF) 4645-0 / 4304-0 (1.6 GPF)			Kingston Toilet 2pc Gravity 25100-0 / 25076-0 (1.28 GPF)	Wellworth Toilet 2pc Pressure Assist 4484-0 / 4303-0 (1.0 GPF) 4645-0 / 4303-0 (1.6 GPF)	Highline Toilet 2pc Pressure Assist 4484-0 / 4304-0 (1.0 GPF) 4645-0 / 4304-0 (1.6 GPF)		
									
Kingston Ultra Toilet Wall Mount 84325-0 (1.0-1.6 GPF)	Wellcomme Ultra Toilet Floor Mount 96053-0 (1.0-1.6 GPF)	Highcliff Ultra Toilet Floor Mount 96057-0 (1.0-1.6 GPF)	Primme Manual Toilet Flushometer 76321-CP (1.28 GPF)	Stronghold Toilet Seat Check Hinge 4731-C-0	Kingston Ultra Toilet Wall Mount 84325-0 (1.0-1.6 GPF)	Wellcomme Ultra Toilet Floor Mount 96053-0 (1.0-1.6 GPF)	Highcliff Ultra Toilet Floor Mount 96057-0 (1.0-1.6 GPF)	Mach Manual Manual Toilet Flushometer 80TM00N10-CP (1.28 GPF)	Stronghold Toilet Seat Self Sustaining Check Hinge 4731-SC-0
									
Bardon Touchles Urinal Integrated Flushometer 32590-0 (0.5 GPF)	Dexter Urinal Compact 5452-ET-0 (0.125 GPF)	Bardon Urinal Half-Stall 4991-ET-0 (0.125-1.0 GPF)	Primme Manual Urinal Flushometer 76317-CP (0.125 GPF)		Bardon Touchles Urinal Integrated Flushometer 32590-0 (0.5 GPF)	Tend Urinal Compact 20713-ET-0 (0.125-1.0 GPF)	Bardon Urinal Half-Stall 4991-ET-0 (0.125-1.0 GPF)	Mach Manual Manual Urinal Flushometer 80UM00D20-CP (0.125 GPF)	
									
Triton Bowe Service Sink Faucet W/ Hook, Full Flow 830T10-5A-CP	Whitby Service Sink 6710-0	Sterling Valton Breakroom Faucet 24274-CP	Sterling Middleton Breakroom Sink 14633-3-NA	Triton Bowe Service Sink Faucet W/ Hook, Brace, Full Flow 830T40-5A-CP	Whitby Service Sink 6710-0		Crue Breakroom Faucet 22972-CP		Sterling McAllister Breakroom Sink 11600-NA



LAVATORY



Taut Faucet
0.5 GPM
46029-4-CP



Composed Touchless Faucet
0.5 GPM, DC-Powered
Single Supply
104C36-SANA-CP



Composed Touchless Soap
DC-Powered, Foam Soap
25195-CP



Brenham WM Lavatory
With Shroud, Single Hole
1997-1L-0 / 1998-0 (No soap hole - shown)
1997-1L-0 / 1998-0 (w/ Left-hand soap hole)
1997-1R-0 / 1998-0 (w/ Right-hand soap hole)



Verticyl Rectangle UM Lavatory
2882-0



Coralais Faucet
0.35 GPM
15198-4ATA-CP



Strayt Touchless Faucet
0.35 GPM, DC-Powered
Single Supply
104S36-SATA-CP



Angle Touchless Soap Dispenser
DC-Powered, Foam Soap
25193-CP



Soho WM Lavatory
Single Hole
2084-0 (No soap hole - shown)
2084-L-0 (w/ Left-hand soap hole)
2084-R-0 (w/ Right-hand soap hole)



Caxton Rectangle UM Lavatory
20000-0

LAVATORY

TOILET



Kingston Toilet
2pc Gravity
25100-0 / 25076-0 (1.28 GPF)



Wellworth Toilet
2pc Pressure Assist
4484-0 / 4303-0 (1.0 GPF)
4645-0 / 4303-0 (1.6 GPF)



Highline Toilet
2pc Pressure Assist
4484-0 / 4304-0 (1.0 GPF)
4645-0 / 4304-0 (1.6 GPF)



Lustra Toilet Seat
Open Front w/ Cover
4650-0



Stronghold Toilet Seat
Quiet Close, Check Hinge
4731-GC-0



Kingston Toilet
2pc Gravity
25100-0 / 25076-0 (1.28 GPF)



Wellworth Toilet
2pc Pressure Assist
4484-0 / 4303-0 (1.0 GPF)



Highline Toilet
2pc Pressure Assist
4484-0 / 4304-0 (1.0 GPF)



Lustra Toilet Seat
Open Front w/ Cover
4650-0



Stronghold Toilet Seat
Quiet Close, Check Hinge
4731-GC-0

TOILET

URINAL



Kingston Ultra Toilet
Wall Mount
84325-0 (1.0-1.6 GPF)



Wellcomme Ultra Toilet
Floor Mount
96053-0 (1.0-1.6 GPF)



Highcliff Ultra Toilet
Floor Mount
96057-0 (1.0-1.6 GPF)



Mach Tripoint
Touchless Toilet Flushometer
DC-Powered
10TD00N10-CP (1.28 GPF)



Kingston Ultra Toilet
Wall Mount
84325-0 (1.0-1.6 GPF)



Wellcomme Ultra Toilet
Floor Mount
96053-0 (1.0-1.6 GPF)



Highcliff Ultra Toilet
Floor Mount
96057-0 (1.0-1.6 GPF)



Mach Tripoint
Touchless Toilet Flushometer
HES-Powered
10TH00K10-CP (1.0 GPF)



Mach Wave
Touchless Toilet Flushometer
HES-Powered
40TH00K10-CP (1.0 GPF)

URINAL



Tend Urinal
Compact
20713-ET-0 (0.125-1.0 GPF)



Bardon Urinal
Half-Stall
4991-ET-0 (0.125-1.0 GPF)



Mach Tripoint
Touchless Urinal Flushometer
DC-Powered
10UD00D20-CP (0.125 GPF)



Tend Urinal
Compact
20713-ET-0 (0.125-1.0 GPF)



Bardon Urinal
Half-Stall
4991-ET-0 (0.125-1.0 GPF)



Mach Tripoint
Touchless Urinal Flushometer
HES-Powered
10UH00D20-CP (0.125 GPF)



Mach Wave
Touchless Urinal Flushometer
HES-Powered
40UH00D20-CP (0.125 GPF)

BACK OF HOUSE



Triton Bowe Service Sink Faucet
W/ Hook, Brace, Integral Stops, Full Flow
838T40-5A-CP



Whitby Service Sink
6710-0



Purist Breakroom Faucet
24982-CP



Vault Breakroom Sink
3821-NA



Triton Bowe Service Sink Faucet
W/ Hook, Brace, Full Flow
830T40-5A-CP



Whitby Service Sink
6710-0



Crue Breakroom Faucet
22972-CP



Undertone Breakroom Sink
3325-NA

BACK OF HOUSE

