



Molveno Reserve

Delivering serene sophistication, Molveno Reserve is inspired by the natural majesty and peacefulness of Molveno, Italy, a spectacular resort town nestled between a crystal-clear alpine lake and the Dolomites.

Molveno Reserve features a range of contemporary wood designs that bring the soothing ambiance of nature indoors. Each plank is embossed in register, matching the surface texture to the visual in order to provide an incredibly realistic look and feel. Enhancing the design, Molveno Reserve's rigid click LVT platform also features an attached pad for greater acoustic comfort.

Like the natural wonderland for which it's named, Molveno Reserve turns any space into a luxurious retreat for the senses.



Learn more at mohawkgroup.com



Cover:

741 Armi; Quiet Musings, 828 Jane





Molveno Reserve is an 8" x 60" rigid click LVT that combines elegant wood aesthetics with high-tech attributes. The product features Uniclic technology and installs as a floating floor to streamline installation. Each plank is 6 mm thick (5 mm + 1 mm attached pad) with a 20 mil heavy commercial wear layer and our premium M-Force™ Ultra technology—ensuring beauty and performance.



PERFORMANCE FOR LIFE

Molveno Retreat features our M-Force Ultra technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.



QUIET SPACES

Our rigid click flooring delivers industry-leading IIC and STC ratings for best-in-class acoustic performance.



100% WATERPROOF

Our rigid click flooring's solid polymer core (SPC) is 100% waterproof, making it ideal for wet areas and guest baths. Our core does not expand or contract – even when moisture is present – ensuring immediate occupancy.



EMBOSSED IN REGISTER (EIR)

This collection is made with embossed in register technology, matching the surface texture to the wood visual for the most realistic look and feel.



ATTACHED BACKING

The fiberglass stabilization layer and cushion backing minimize movement of the product while providing a superb moisture and sound barrier.

ADDITIONAL FEATURES

- 20-Year M-Force Ultra Commercial Warranty
- No adhesive or underlayment required
- FloorS core® Certified for Low VOCs
- Immediate occupancy





Colorways









741 Armi

728 Londra 731 Lido










821 Alpenrose 837 Rifugio 842 Enrosadira







847 Basso 849 Coccle 855 Charme

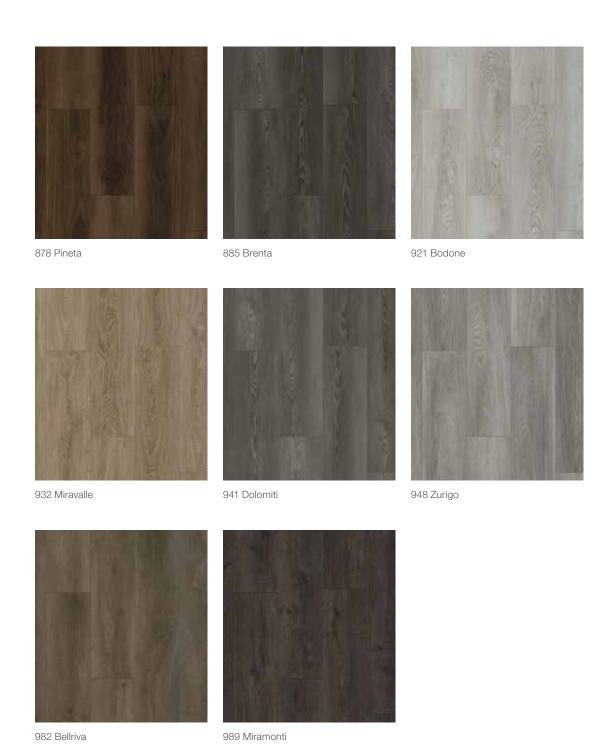







Carpet Tile Area Rug Program

Mohawk Group believes in empowering architects and designers with the tools to achieve their vision. With our carpet tile area rug program we merge design with scale and versatility. Pick your favorite Mohawk Group carpet tile design and transform it into a beautiful area rug in a few simple steps:

- 1. Select your pattern and color
- 2. Determine your rug size (max. 12'x12')
- 3. Select edge treatment and color
- 4. Attached non-skid backing required
- 5. Submit your order

Ready to Order?

- Contact your Mohawk Group or Durkan Account Executive
- Email custom_cs@mohawkind.com
- Call 800.622.6228, ext. 24733







Better for People and Planet

Our future depends on the work we do today. At Mohawk, our commitment to our planet extends beyond just products and processes: it's how we challenge ourselves to do and be better every day, how we make decisions, how we reinvest in our people and our planet, and how we define what matters most as we work to deliver value for generations to come.



Human Health

Health Product Declaration FloorScore® Certification

Mohawk Group is proud to provide products with verified documentation of their impact throughout the lifecycle, with FloorScore certification for better indoor air quality.



Climate Health

Beyond Carbon Neutral

Carbon neutral PLUS an additional 5% carbon offset for a net-positive impact on the environment.

Net Zero Carbon Emissions by 2040

We've signed The Climate Pledge to be net zero by 2040 and have already started major changes to reduce our carbon footprint.

Circular Economy

End of Life Options


Salvageable/Reusable in its Entirety Take Back Program (ReCover)

Ecosystem Health

Neutral Is Not Enough

With the holistic improvement of the lifecycle of our flooring products – from full product transparency, to reduced water usage in manufacturing, to carbon neutrality and beyond – better is just the beginning.



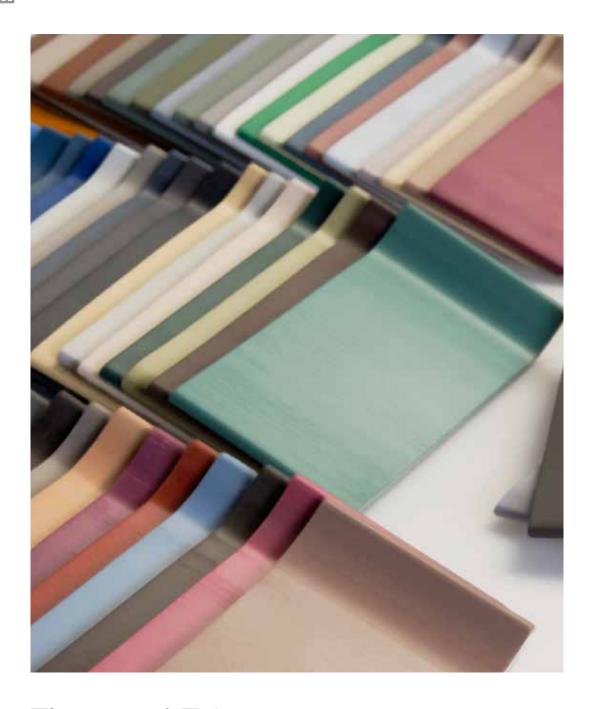

Elemental Edges WALL BASE

At Mohawk Group we believe in providing project solutions that are easy to select and readily available. Elemental Edges is a portfolio of wall bases for your fi nishing needs. Our architectural and cove wall bases are offered in 14 QuickShip colors that coordinate perfectly with our full suite of soft and hard surface products.



ELEMENTAL EDGES ACCESSORIES

Specifications

Molveno Reserve (C2091)

DESIGN

Product TypeLuxury Vinyl Tile - RigidOverall Thickness6mm (5mm + 1mm pad)Wear Layer20 mil (0.5mm)FinishM-Force™ Ultra

Colors

Size

 Actual
 7.75" x 59.75"

 Nominal
 8" X 60"

 Emboss
 Overall

 Bevel
 Micro Bevel

Packaging 97.06 oz per pc / 8 pcs per carton / 23.7 sq ft per carton

17

50 cartons per pallet / 18 pallets per container Floating LVT with Uniclic Locking System

Installation & Adhesive Floating LVT with Uniclic Locking System

For detailed adhesive and installation information

visit mohawkgroup.com

PERFORMANCE

Construction Commercial Grade Luxury Rigid Click Vinyl Tile

Classification ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed

Squareness ASTM F 2421 - Passes - ± 0.10 " max Size and Tolerance ASTM F2421 - Passes - ± 0.016 "/linear foot Thickness ASTM F386 - Passes, as specified $\pm .005$ " Flexibility ASTM F137 - Passes - 1" mandrel

Dimensional Stability ASTM F2199 - Passes - 0.020"/linear foot max Static Load Limit ASTM F970 - Passes, modified at 1000 psi

Residual Indentation ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%

Resistance to Chemicals ASTM F925 - Passes - No more than a slight change

Resistance to Light ASTM F1515 - Passes, $\Delta E \le 8$ Resistance to Heat ASTM F1514 - Passes, $\Delta E \le 8$ Critical Radiant Flux ASTM E648 - Class 1 (>0.45 W/cm2) Smoke Density ASTM E662 - Meets, 450 or less

SUSTAINABILITY

Certification FloorScore® Certified

Carbon Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties Limited 20 Year M-Force™ Ultra Commercial

For detailed warranty information visit mohawkgroup.com



