



Elan Valley II

2/6 2/12 2.5/20 5.0/20



Elan Valley II

The Elan Valley II collection evokes the serene beauty of the Welsh countryside, infusing your space with the charm of tranquil landscapes and quiet mornings. Available in a range of wear layers and thicknesses, this collection ensures both durability and versatility.

Elan Valley II is a wood-grain LVT offered in eight landscape-inspired colorways that capture the essence of relaxed, natural surroundings. Each colorway is available in multiple performance options to suit a range of applications:

- 2.0 mm thickness with a 6 mil wear layer, referenced as 2/6
- 2.0 mm thickness with a 12 mil wear layer, referenced as 2/12
- 2.5 mm thickness with a 20 mil wear layer, referenced as 2.5/20
- 5.0 mm thickness with a 20 mil wear layer, referenced as 5.0/20

Its soft, calming neutral tones create an ideal foundation for workplace, retail and multi-family interiors and foster a comfortable, home-like atmosphere throughout the space.



Learn more at mohawkgroup.com







Colorways



16 Morning Mist



222 Aurora



232 Daybreak



711 Alba



838 Dusk



848 Morrow



868 Dagny



878 Lark

Mohawk Group



16 Morning Mist



Ultra Performance and Worry-Free Solutions for Any Project

Elan Valley II is designed with a 20 mil heavy commercial wear layer and our premium M-Force® technology, which delivers a complete performance system for LVT. The 6mm and 12mm thicknesses with M-Force® technology provide the same performance and durability within multi-family and senior living environments.

M-Force®

This product features our M-Force® technology providing exceptional scratch, stain and dent resistance, and easy maintenance for lasting beauty.

Quicker Installation

The 5.0 mm thickness supports loose-lay installation, with larger areas requiring only a perimeter spread of releasable adhesive. When paired with our carpet tile products using EcoFlex® ONE or EcoFlex® AIR backing, transition strips are not required.


The 2.5 mm thickness integrates seamlessly and requires no transition strips with carpet tile collections on EcoFlex® Matrix carpet backing.



All our flooring products go Beyond Carbon Neutral, meaning they are 100% carbon neutral plus an additional 5% carbon handprint for a Net-Positive impact.

M-Force®

Single layer through-pattern construction for high durability, abrasion and gouge resistance with our M-Force® commercial finish to enhance scratch, scuff and stain performance.

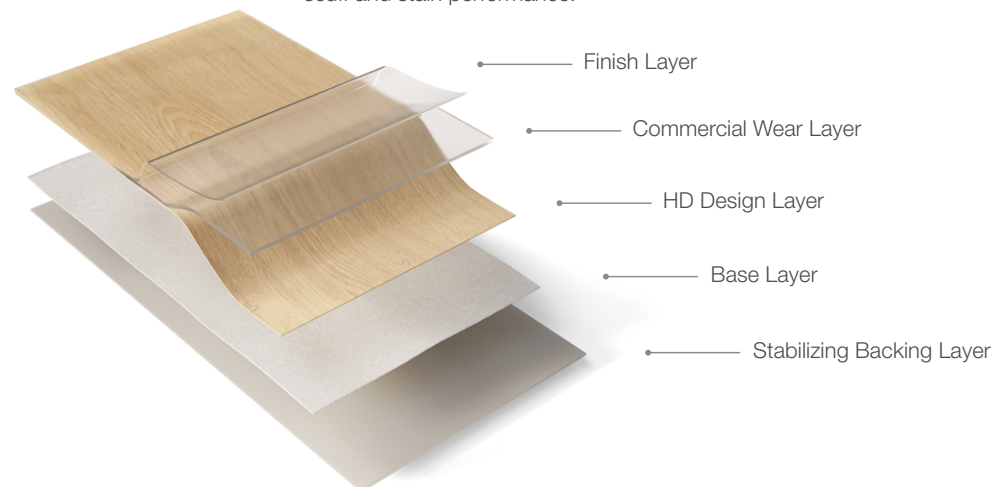



Specifications

Elemental Edges

WALL BASE

At Mohawk Group we believe in providing project solutions that are easy to select and readily available. Elemental Edges is a portfolio of architectural and cove wall base for your finishing needs. Featuring a range of colors that coordinate with our full product line, Elemental Edges also offers 14 QuickShip colors in cove wall base.



**ELEMENTAL EDGES
ACCESSORIES**

Running Line Area Rug Program

Unlock your creative freedom with our innovative Running Line Rug Program. Dive in and explore our carefully curated styles, mix and match colors, sizes, and edge treatments to create the perfect rug for your space.



**SCAN TO
LEARN MORE**

Elan Valley II 2.5mm (C2105) **Elan Valley II 2/6** (C2093)
Elan Valley II 5.0mm (C2106) **Elan Valley II 2/12** (C2094)

DESIGN

Product Type	Luxury Vinyl Tile
Overall Thickness	2.5mm 5.0mm 2.0mm
Wear Layer	20 mil (0.5mm) 20 mil (0.5mm) 6 mil (0.152mm) 12 mil (0.3mm)
Finish	Enhanced Urethane
Colors	8
Actual & Nominal Size	7.25" x 48" 7.25" x 48" 6" x 48" 6" x 48"
Emboss	Overall
Bevel	Straight Edge Micro Bevel
Installation & Adhesive	Brick Ashlar, Herringbone, Random Glue Down M95.0, M99, MS160 or M700 Plus Brick Ashlar, Herringbone, Random Glue Down M95.0, M99, MS160 or M700 Plus or Loose Lay Brick Ashlar, Herringbone, Random, Glue Down-M95.0, MS160 or M700 Plus or Loose Lay
Elan Valley II 2.5/20	
Elan Valley II 5.0/20	
Elan Valley II 2/6, 2/12	
Packaging	58 sqft/ctn, 58 ctn/pallet, 39.99lbs. per pallet 24.2 sqft/ctn, 24 ctn/pallet, 39.99lbs. per pallet 54 sqft/ctn, 54 ctn/pallet, 39.99 weight/ctn 54 sqft/ctn, 54 ctn/pallet, 39.99 weight/ctn
Elan Valley II 2.5/20	
Elan Valley II 5.0/20	
Elan Valley II 2/6	
Elan Valley II 2/12	

PERFORMANCE

Construction	Commercial Flexible Luxury Vinyl Tile
Classification	ASTM F1700 - Class III, Type B - Embossed
Squareness	ASTM F2421 - Passes - ±0.10" max
Size and Tolerance	ASTM F2421 - Passes - ±0.016"/linear foot
Thickness	ASTM F386 - Passes, as specified ± .005"
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes, Avg less than 8%, Max Single Reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes, ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes, ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 - Meets, 450 or less

SUSTAINABILITY

Certifications	FloorScore®
Carbon	Net-Positive Carbon (Neutral +5%)

SERVICE

Warranties	15 Year Commercial 15 Year Commercial 15 Year Residential Limited 6 Year Light Commercial
Elan Valley II 2.5/20	
Elan Valley II 5.0/20	
Elan Valley II 2/6	
Elan Valley II 2/12	

